



BERICA 1.0

Berica is a family of single- and double-beam, indoor wall-mounted fixtures that can discreetly blend into the wall on which it is installed - or can disappear completely if the primer finish is chosen. Berica is available in 3 sizes and 3 different styles of cover - convex, flat and concave. Berica 1.0 is a convex 4.7" version available in 3 color temperatures and 5 standard finishes.

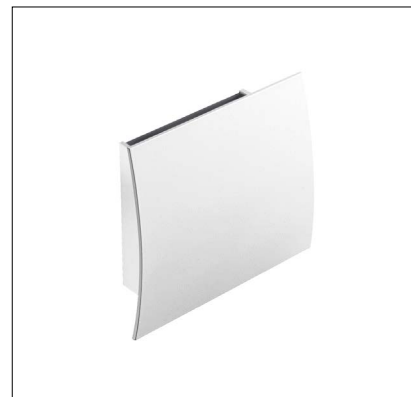

ADA Compliant

Fixture Dimensions



TECHNICAL DATA

Wattage	6W per beam
Power Supply	Integral 120VAC & 277VAC - 0-10V Dimming Integral 120VAC Only - Triac and ELV Dimming
Construction	Body/Cover: Anticorodal Aluminum
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	328 lm per beam (3000K, 43°x96°)
Efficacy	41 lm/W per beam (3000K, 43°x96°)
Optics	4 Standard, see below
Finishes	5 Standard, see below
Fixture Dimensions	4.72" l x 4.72" w x 1.30" h
Fixture Weight	0.77 lbs
LED Source	8 Mid Power LEDs per beam
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP40

ORDERING INFORMATION

Example: **BB101010005KW8**.

	1000			
Model No.	CRI	CCT	Optics	Finish
BB1010 - Double Beam	1000 - CRI>90	F - 2700K	LW - 43°x96°	Z - Antique Bronze
BB1011 - Single Beam		5 - 3000K	KW - 54°x90°	6 - Antique White
		9 - 4000K	0A - Asymmetrical	K - Matte Aluminum Gray
			0D - Diffuse	8 - Primer
				B - White


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 224.9

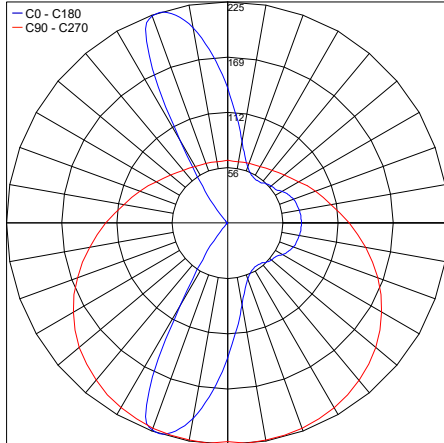


PHOTOMETRIC FILENAME : BERICA 1.0 Double A [3000K 8W].IES

Maximum Candela = 148.7

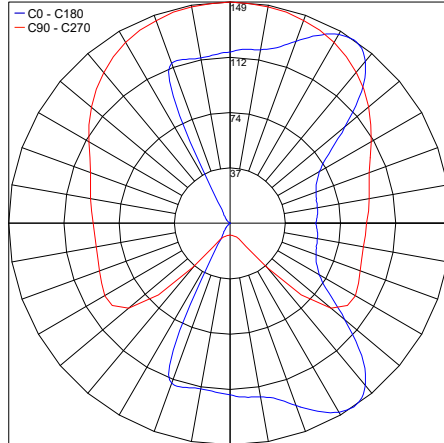


PHOTOMETRIC FILENAME : BERICA 1.0 Double D [3000K 8W].IES

Maximum Candela = 187.1

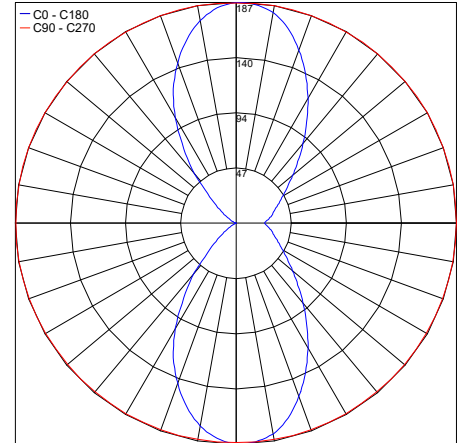


PHOTOMETRIC FILENAME : BERICA 1.0 Double K 54°X90° [3000K 8W].IES

Maximum Candela = 222.8

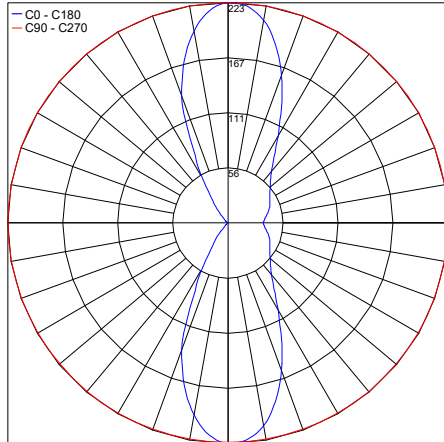


PHOTOMETRIC FILENAME : BERICA 1.0 Double L 43°X96° [3000K 8W].IES

Maximum Candela = 224.5

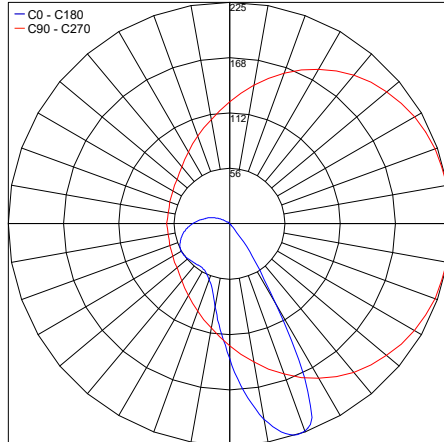


PHOTOMETRIC FILENAME : BERICA_IN_1.0_Single_A_3000K_5W.IES

Maximum Candela = 148.5

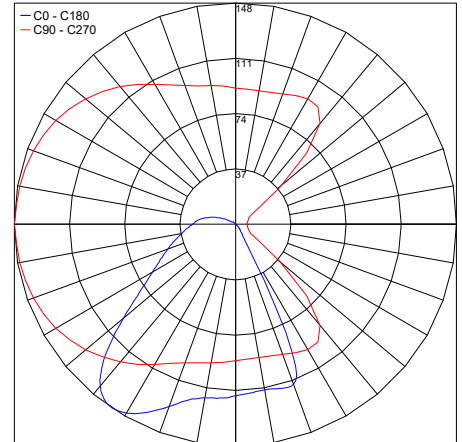


PHOTOMETRIC FILENAME : BERICA_IN_1.0_Single_D_3000K_5W.IES

Maximum Candela = 187.1

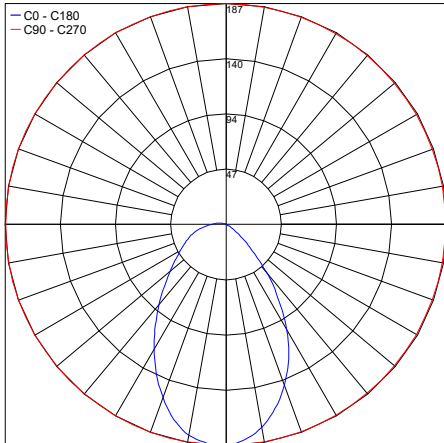

PHOTOMETRIC FILENAME : BERICA_IN_1.0_Single_K_54X90_3000K_5W.IES

Maximum Candela = 222.5

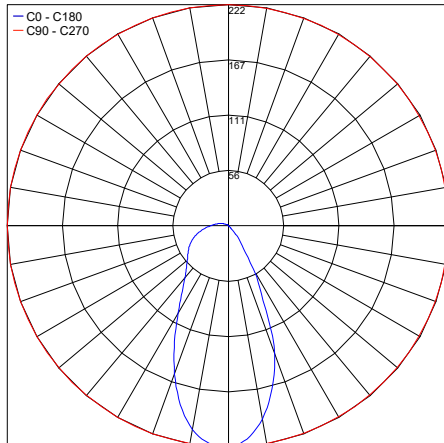

PHOTOMETRIC FILENAME : BERICA_IN_1.0_Single_L_43X96_3000K_5W.IES

Job Name/Date:

Fixture Type Designation: