


INDOOR RECESSED DOWNLIGHTS FOR OFFICES AND WORK SPACES



RECESSED



1 OPTICS



BITPOP 1.0

7W 500mA
ON/OFF, DALI, 0-10V


2 OPTICS IN A LINE



BITPOP 2.1

9W 350mA, 12W 500mA
ON/OFF, DALI, 0-10V

4 OPTICS IN A SQUARE



BITPOP 2.2

17W 350mA, 24W 500mA
ON/OFF, DALI, 0-10V

4 OPTICS IN A LINE



BITPOP 4.1

17W 350mA, 24W 500mA
ON/OFF, DALI, 0-10V

8 OPTICS IN A LINE



BITPOP 8.1

34W 700mA, 48W 1000mA
ON/OFF, DALI, 0-10V

CEILING MOUNTED

BITPOP C



< **BITPOP 8.1**
3000K, 50W, 17°x45°, black
rebat installation



▼

BITPOP 2.2
3000K, 24W, 17°, white
rebated installation

BITPOP 2.2
3000K, 24W, 17°, white
deep-set installation with outer casing

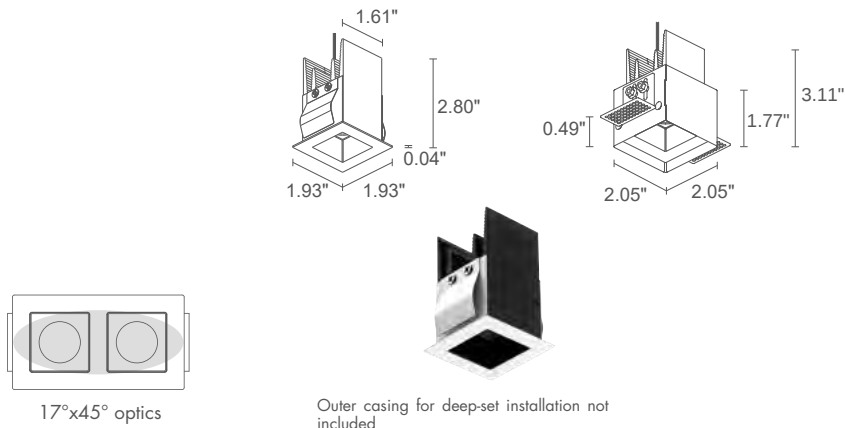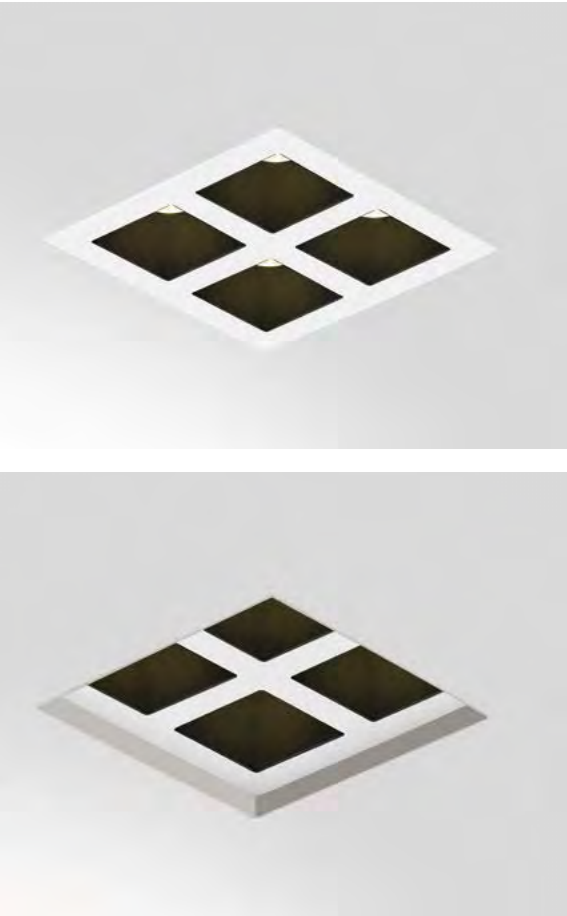

BITPOP 1.0

5.5"x5.5"
H 4.33" 1.69"x1.69"

CB



0.57 lbs IP40

DALI PUSH 0-10V

POWER /MODEL CODE

7W 500mA
BP1010 **W** White – white interior
BP1010 **B** White – black interior
BP1010 **N** Black – black interior

LED COLOR	1F - 2700K CRI >90 1S - 3000K CRI >90 09 - 4000K CRI 80
OPTICS	S - 17° F - 30° L - 42° W - 17°x45°
CONTROL SYSTEM	O - on/off R - 0-10V + PUSH D - DALI + PUSH

LUMEN OUTPUT AT SOURCE 480 lm (3000K)

DELIVERED LUMEN OUTPUT 335 lm (3000K, 30°)

NO. AND TYPE OF LED 1 high-intensity power LED
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

MATERIAL body in black-anodized aluminum
trim in steel

POWER SUPPLY UNIT 500mA: not included

POWER CABLES includes 4.92 ft PVC cable FROR
2x0.35 Ø0.14 in


MOUNTING recessed (ceiling: rebated or deep set)

ACCESSORIES see accessories page


FEATURES UGR < 10 for the 17° and 30° optics

NOTES ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request



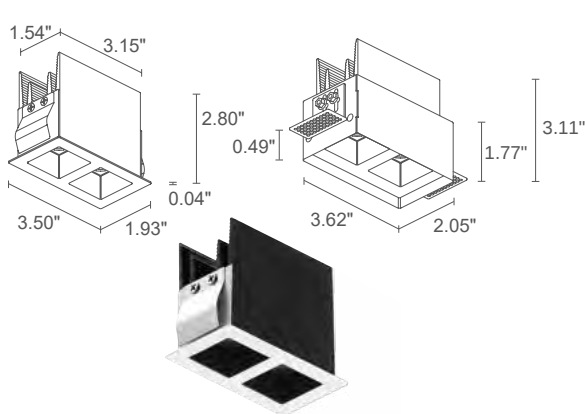

Outer casing for deep-set installation not included

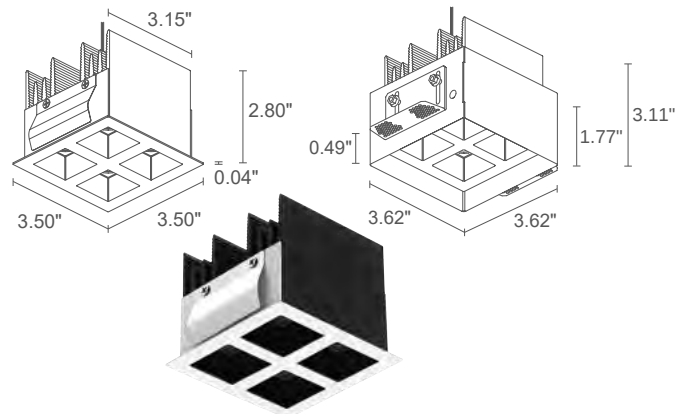

Outer casing for deep-set installation not included

BITPOP 2.1

6.7" x 3.54"
H 5.12"

3.27" x 1.65"



0.77 lbs IP40

DALI PUSH 0-10V

9W 350mA

BP2110 ■ ■ ■ White – white interior
BP2110 ■ ■ ■ White – black interior
BP2110 ■ ■ ■ Black – black interior

12W 500mA

BP2111 ■ ■ ■ White – white interior
BP2111 ■ ■ ■ White – black interior
BP2111 ■ ■ ■ Black – black interior

BITPOP 2.2

6.7" x 6.7"
H 5.12"

3.23" x 3.23"



2.12 lbs IP40

DALI PUSH 0-10V

17W 350mA

BP2210 ■ ■ ■ White – white interior
BP2210 ■ ■ ■ White – black interior
BP2210 ■ ■ ■ Black – black interior

24W 500mA

BP2211 ■ ■ ■ White – white interior
BP2211 ■ ■ ■ White – black interior
BP2211 ■ ■ ■ Black – black interior

■	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80
■	S - 17° F - 30° L - 42° W - 17°x45°
■	O - on/off R - 0-10V + PUSH D - DALI

■	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80
■	S - 17° F - 30° L - 42° W - 17°x45°
■	O - on/off R - 0-10V + PUSH D - DALI + PUSH

700 lm (3000K, 10W)
960 lm (3000K, 15W)

496 lm (3000K, 30°, 10W)
670 lm (3000K, 30°, 15W)

2 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel

500mA - not included

includes 0.98 ft cable

recessed (ceiling: rebated or deep set)

see accessories page

UGR < 10 for the 17° and 30° optics

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request

1400 lm (3000K, 18W)
1920 lm (3000K, 26W)

992 lm (3000K, 30°, 18W)
1340 lm (3000K, 30°, 26W)

4 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel

500mA - not included

includes 0.98 ft cable


recessed (ceiling: rebated or deep set)

see accessories page

UGR < 10 for the 17° and 30° optics

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request



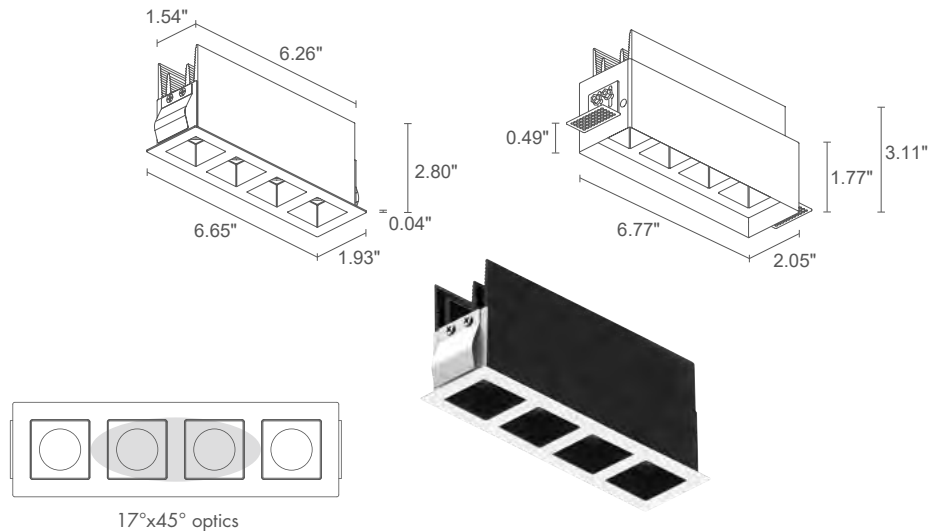

Outer casing for deep-set installation not included

BITPOP 4.1

13.39" x 3.94"
H 5.12"

6.38" x 1.65"

CB

S

LED TECH

IP40

0.93 lbs

DALI

PUSH

0-10V

POWER / MODEL CODE

17W 350mA

BP4110 **W** White – white interior

BP4110 **B** White – black interior

BP4110 **N** Black – black interior

24W 500mA

BP4111 **W** White – white interior

BP4111 **B** White – black interior

BP4111 **N** Black – black interior

LED COLOR

1F - 2700K CRI >90

15 - 3000K CRI >90

09 - 4000K CRI 80

OPTICS

S - 17°

F - 30°

L - 42°

W - 17°x45°

CONTROL SYSTEM

O - on/off

R - 0-10V + PUSH

D - DALI + PUSH

LUMEN OUTPUT AT SOURCE

1400 lm (3000K, 18W)

1920 lm (3000K, 26W)

DELIVERED LUMEN OUTPUT

992 lm (3000K, 30°, 18W)

1340 lm (3000K, 30°, 26W)

NO. AND TYPE OF LED

4 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

MATERIAL

body in black-anodized aluminum
trim in steel

POWER SUPPLY UNIT

500mA - not included

POWER CABLES

includes 0.98 ft cable

MOUNTING

recessed (ceiling: rebated or deep set)

ACCESSORIES

see accessories page

FEATURES

UGR < 10 for the 17° and 30° optics

NOTES

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request

▼

BITPOP 4.1


3000K, 24W, 17°, white
rebated installation

BITPOP 4.1

3000K, 24W, 17°, white
deep-set installation with outer casing



Designplan | L&L Luce&Light

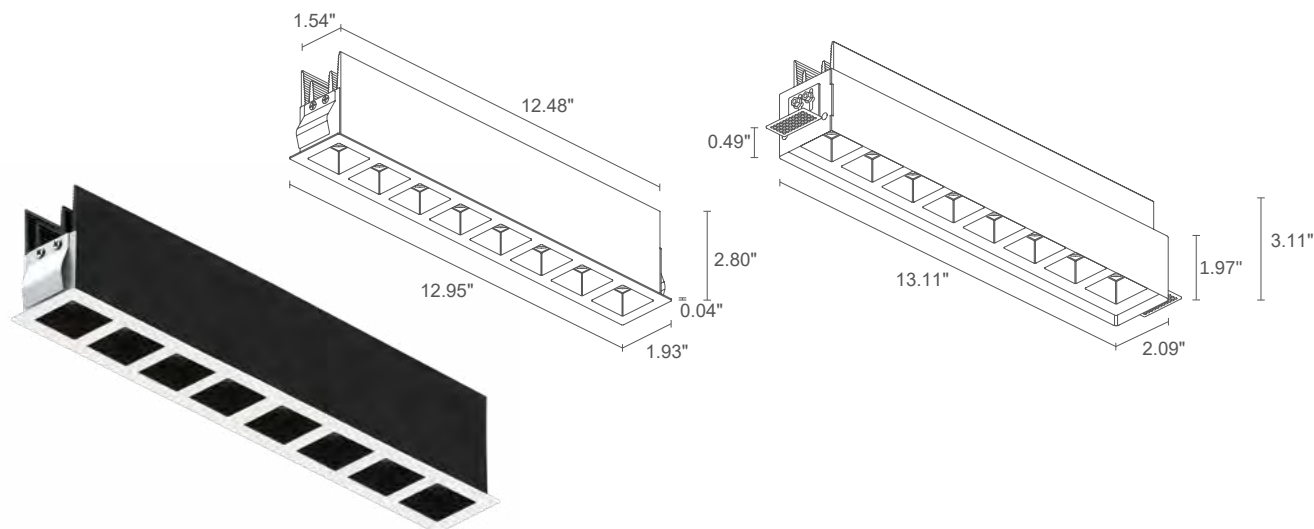

Outer casing for deep-set installation not included

BITPOP 8.1



CB



2.43 lbs IP40



DALI PUSH 0-10V

34W 700mA

- BP8110** ■ ■ **W** ■ White – white interior
- BP8110** ■ ■ **B** ■ White – black interior
- BP8110** ■ ■ **N** ■ Black – black interior

48W 1000mA

- BP8111** ■ ■ **W** ■ White – white interior
- BP8111** ■ ■ **B** ■ White – black interior
- BP8111** ■ ■ **N** ■ Black – black interior

■	1F - 2700K CRI >90 15 - 3000K CRI >90 09 - 4000K CRI 80
■	S - 17° F - 30° L - 42° W - 17°x45°
■	O - on/off R - 0-10V + PUSH D - DALI + PUSH

2800 lm (3000K, 35W)
3840 lm (3000K, 50W)

1984 lm (3000K, 30°, 35W)
2680 lm (3000K, 30°, 50W)

8 high-intensity power LEDs
3-step MacAdam, 50000h L85 B10 (Ta 25°C)

body in black-anodized aluminum
trim in steel

1000mA - not included

includes 0.98 ft cable

recessed (ceiling: rebated or deep set)

see accessories page

UGR < 10 for the 17° and 30° optics

ceiling-mounted version: Bitpop C, Casambi-compatible version, controllable with the Casambi app, available on request





ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC8703 - White
WC8703N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 1.0)




WC8713 - White
WC8713N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 2.1)




WC8704 - White
WC8704N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 2.2)




WC8705 - White
WC8705N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 4.1)

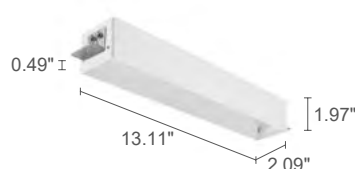


WC8710 - White
WC8710N - Black
Outer casing for deep-set installation in plasterboard ceilings (Bitpop 8.1)




WC8700
Outer casing for rebated installation in solid ceilings (Bitpop 1.0)




WC8712
Outer casing for rebated installation in solid ceilings (Bitpop 2.1)

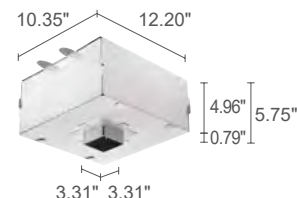

WC8701
Outer casing for rebated installation in solid ceilings (Bitpop 2.2)

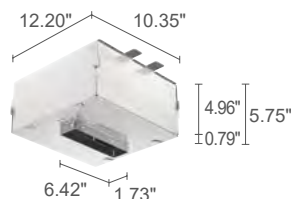

WC8702
Outer casing for rebated installation in solid ceilings (Bitpop 4.1)

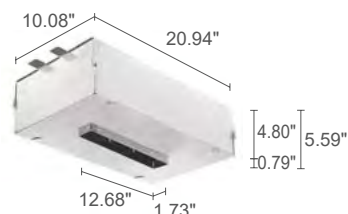


WC8709
Outer casing for rebated installation in solid ceilings (Bitpop 8.1)


INDOOR RECESSED

BITPOP 1.0


S - 17°

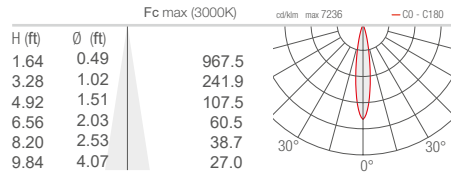


F - 30°

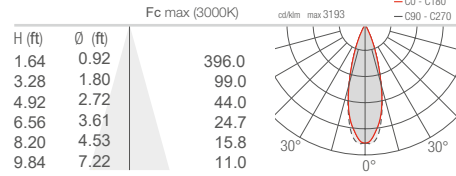

L - 42°

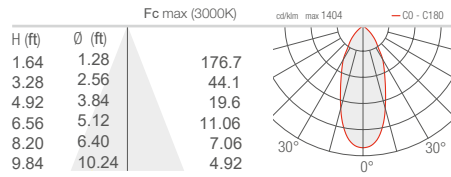


W - 17°x45°

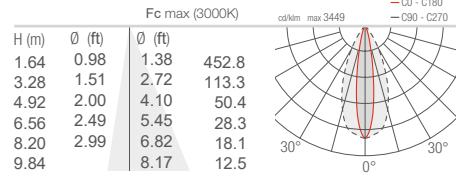


BITPOP 2.1


S - 17°

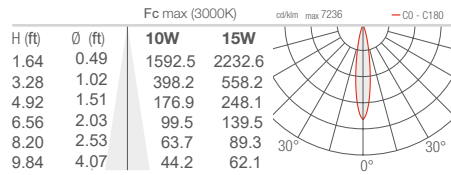


F - 30°

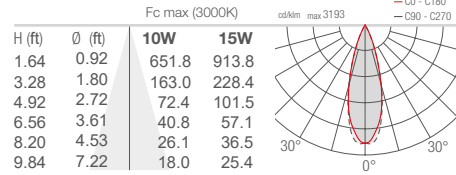

L - 42°

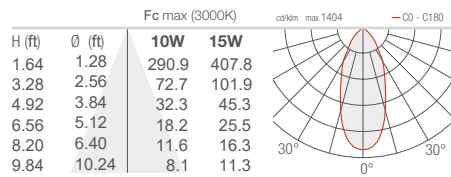


W - 17°x45°

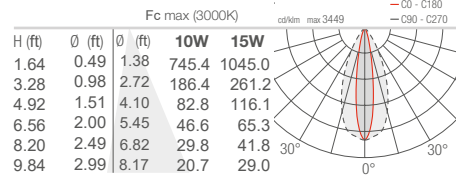


BITPOP 2.2 4.1


S - 17°

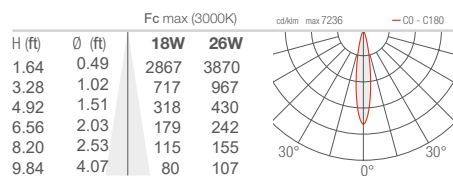


F - 30°

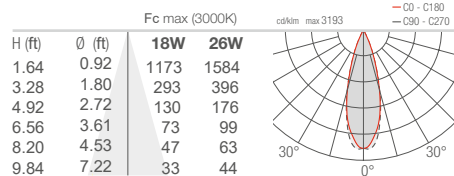

L - 42°

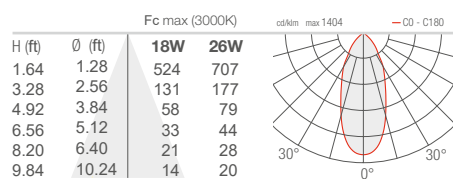


W - 17°x45°

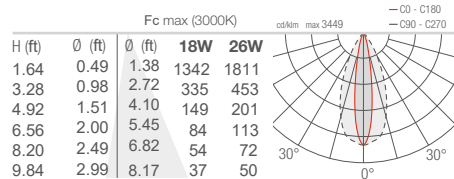


BITPOP 8.1


S - 17°

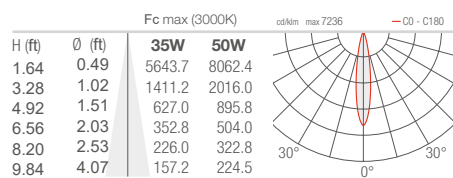

F - 30°

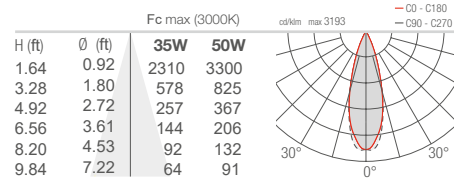

L - 42°

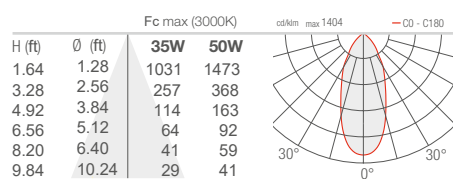

W - 17°x45°

