



LED spotlight C1-DL

description:

LED spotlight for installation in display case ceilings,
360° rotatable, 55° swiveling

housing color:

aluminum anodized black, silver, gold
(other surface finishing on request)

optics:

10°, 15°, 20°, 35°, 45°, 80°, 46°+ 10°

light color (+/- 100K):

2700K, 3000K, 3500K, 4000K, 5700K

high power LED, high CRI DIN EN 55015:2013,
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP20

max. luminous flux (3000K | standard lens 20°):

180see drivers

power input: constant current up to max. 700 mA


remote driver required: see datasheet

dimming: see drivers

optional accessory:

honeycomb grid, anti-glare tube, inclined tube,
light diffusion foil, barn door,
zoom optic (2° - 25°, 6° - 36°)




dimensions

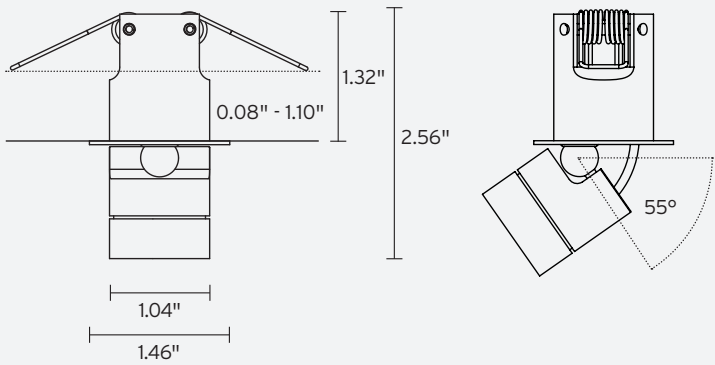

specification in inches

photometry

for light color 3000K | standard lens 20° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

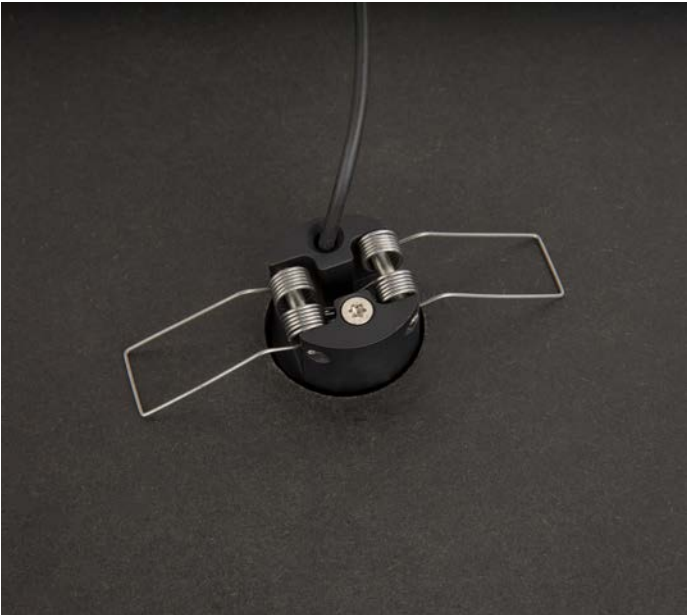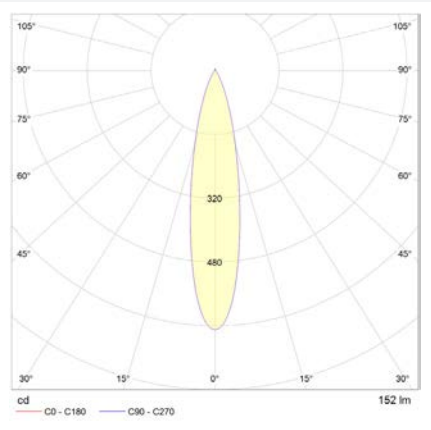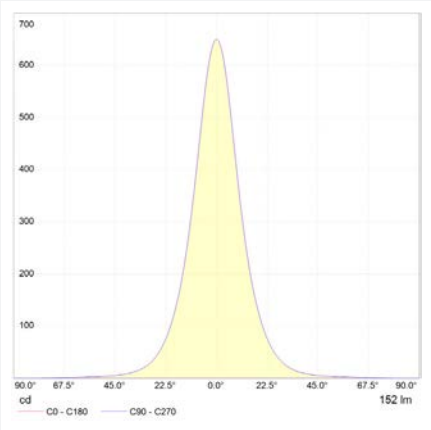

technical changes reserved | May 2021