

The Cameo 2.6 is a small recessed downlight for indoor applications perfect for recessed or false ceilings and niches in plasterboard. It is offered in 3 color temperatures and 6 optical options.


## TECHNICAL DATA

|                           |                                                             |
|---------------------------|-------------------------------------------------------------|
| <b>Wattage / Input</b>    | 5W (24VDC)                                                  |
| <b>Power Supply</b>       | Remote, not included. See page 2.                           |
| <b>Construction</b>       | Body/Trim: Aluminum Alloy EN AW 6026<br>Cable Length: 4.92' |
| <b>CCT</b>                | 2700K, 3000K, 4000K<br>(3500K on request, consult factory)  |
| <b>CRI</b>                | >90                                                         |
| <b>Delivered Lumens</b>   | 303 lm (3000K, 29°)                                         |
| <b>Efficacy</b>           | 60.6 lm/W (3000K, 29°)                                      |
| <b>Optics</b>             | 6 Standard (see below)                                      |
| <b>Finishes</b>           | White, Black, Custom RAL<br>(4 Stage Marine Grade Finish)   |
| <b>Fixture Dimensions</b> | Ø1.93" x 1.69" h                                            |
| <b>Cut-out Size</b>       | Ø1.77" (for ceiling installations)                          |
| <b>Fixture Weight</b>     | 0.33 lbs                                                    |
| <b>LED Source</b>         | 1 Power High Intensity LED                                  |
| <b>Lumen Maintenance</b>  | L95, B10 >50,000hrs (Ta 25°C)                               |
| <b>Color Consistency</b>  | 3-Step MacAdam                                              |
| <b>Operating Temp.</b>    | 32°F to +113°F                                              |
| <b>IP Rating</b>          | IP40                                                        |
| <b>IK Rating</b>          | -                                                           |



Cutout Dimensions for ceiling installations = Ø1.77"

Fixture Dimensions

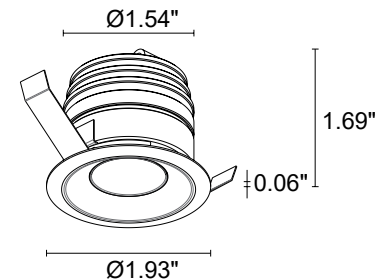

## ORDERING INFORMATION

Example: CM26001000F0SN. Power Supplies / Accessories ordered separately.

| CM26001000 |                                        |                                                                            |                                                                       |
|------------|----------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Model No.  | CCT                                    | Optics                                                                     | Finish                                                                |
| CM26001000 | F0 - 2700K<br>50 - 3000K<br>90 - 4000K | S - 11°<br>M - 17°<br>P - 19° sharp<br>L - 32°<br>J - 65°<br>W - 13° x 43° | E - White<br>N - Black<br>C - Custom RAL<br>(Consult factory for "C") |

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00284</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 100W, Class 2 | 1-16          |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 2-16          |

**Suggested Lutron Compatible**

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-15          |

**DRIVERS IN NEMA ENCLOSURE**

Remote 24VDC - ELV / TRIAC / 0-10V






PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-15          |

*For other power supply options consult factory.**Job Name/Date:**Fixture Type Designation:*

## ACCESSORIES - Installation



**AH-00009-IC** (IC Rated)


**AH-00009-CP** (Chicago Plenum Rated)

Housing for recessed installation in ceilings.


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### S - 11°

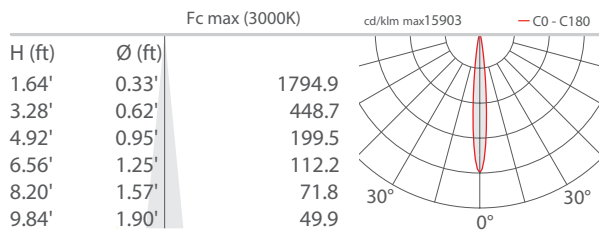


### M - 17°

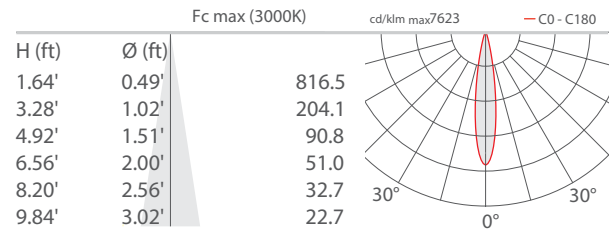


### P - 19° Sharp

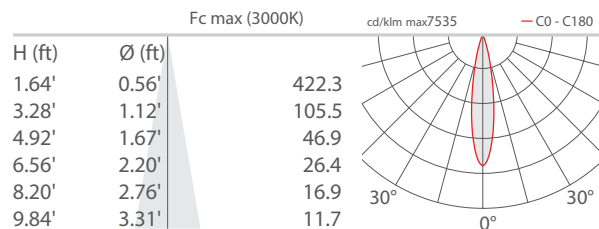


### L - 32°

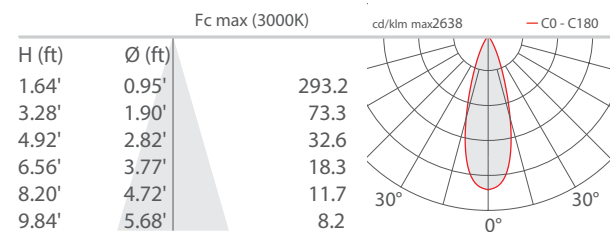

### J - 65°

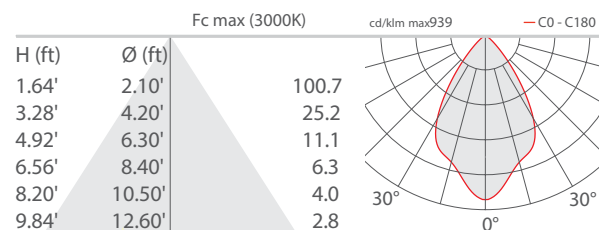

### W - 13°x43°

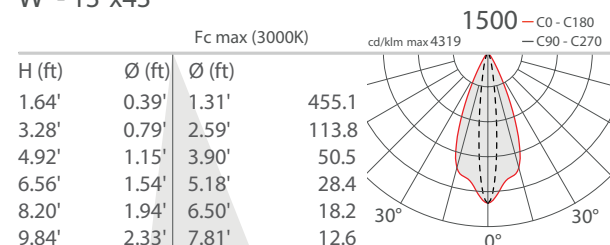

Job Name/Date:

Fixture Type Designation: