



Ecla is a totally disappearing rounded recessed indoor luminaire made of AirCoral® and suitable for installation on plasterboard or brick ceilings. It is available in 3000K standard with a 40° optic. Dim to Warm version available.

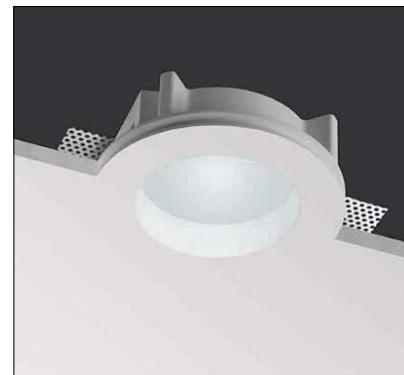

TECHNICAL DATA

Wattage / Input	9W (500mA - Static White) 6W (350mA - Dim to Warm)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral® Lens: Frosted Glass
CCT	3000K (standard) 2700K, 4000K (on request) Dim to Warm (1800K-3000K)
CRI	>90
Delivered Lumens	557 lm (3000K)
Efficacy	61.9 lm/W
Optics	40°
Finishes	AirCoral® - suitable for painting
LED Source	Professional COB LED
Fixture Dimensions	Ø6.30" x 4.72" h
Cut-out Dimension	Ø6.69"
Aperature	Ø3.94"
Fixture Weight	2.65 lbs
IP Rating	IP40

Fixture Dimensions

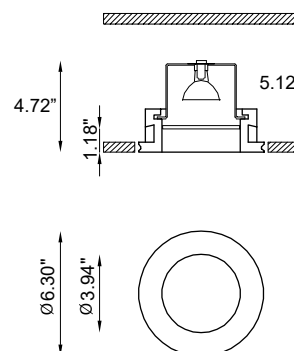

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

Additionally, AirCoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

ORDERING INFORMATION

Example: BU6268.Z.AC.US. Power Supplies ordered separately.

BU6268.Z		AC	US
Model No.	CCT	Finish	
BU6268.Z	30 - 3000K (standard) 27 - 2700K 40 - 4000K	AC - AirCoral®	US
BU6215.AC 4R40M98WD	DimWarm version		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA - 9W

Part Number	Description	Input/Output	# of Fixtures
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-3


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00676	PEQ0E	PEQ0	100%-0.1%	Hi-Lume Premier 0.1% EcoSystem™ LED Driver (F2B)	120-277VAC to 500mA, 20W, Class 2	1-2
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	2-2

SUGGESTED POWER SUPPLY FOR DIM WARM VERSION

350mA - 6W

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-3

*For other power supply options consult factory.***ACCESSORIES****Installation****BR6268-LT**

IC Rated Back Box

BR6268-LT-C


Chicago Plenum Back Box

BR6268-LT-PC

Concrete Pour Back Box

PHOTOMETRIC DATA*Note all Photometry is 3000K*

Maximum Candela = 685

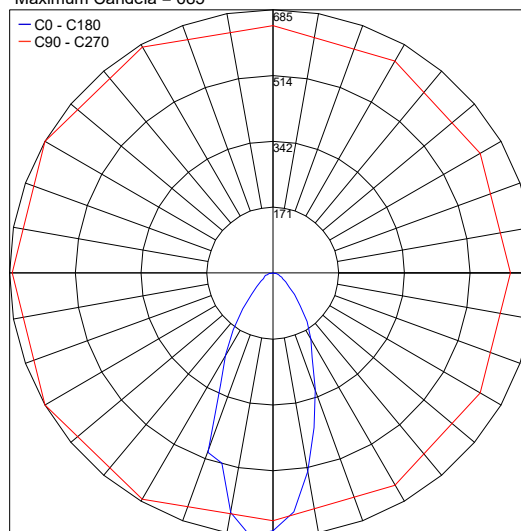

PHOTOMETRIC FILENAME : ECLA BU6268.Z.AC 10W 3000K.IES

*Job Name/Date:**Fixture Type Designation:*