

ELLO IN

INDOOR CEILING MOUNTED WITH DIFFUSE LIGHT



diffuse




2700K 3000K 4000K

INDOOR

OUTDOOR

CEILING MOUNTED



ELLO IN 1.0
7W 24VDC
493 lm (3000K)



ELLO IN 2.0
13W 24VDC
985 lm (3000K)



ELLO IN 3.0
19W 24VDC
1478 lm (3000K)

ELLO OUT

WALL MOUNTED

ELLA IN


ELLA OUT

< **ELLO IN 3.0**
3000K, 19W
chrome, pure orange, reseda green



Designplan | L&L **Luce&Light**

✓
ELLO IN 2.0
 3000K, 13W, white



ELLO IN 1.0

LED 100% 0.88 lbs IP40 IK08

POWER / MODEL CODE	7W 24VDC
	EP1010 DB N White
	EP1010 DC N Chrome
	EP1010 D 1 N Pure orange
	EP1010 D 2 N Reseda green
	EP1010 D 3 N Capri blue
	EP1010 D 4 N Light ivory

LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
------------------	--

OPTICS	diffuse
---------------	---------

LUMEN OUTPUT AT SOURCE	954 lm (3000K)
------------------------	----------------

DELIVERED LUMEN OUTPUT	493 lm (3000K)
------------------------	----------------

NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
---------------------	---

MATERIAL	body in aluminum lens in serigraphed extra-clear microprismatic glass
----------	--



POWER SUPPLY UNIT	remote power supply required, not included
-------------------	--

MOUNTING	surface mounted (ceiling)
----------	---------------------------


ACCESSORIES	see accessories
-------------	-----------------

NOTES	outdoor version: Ello OUT 1.0, wall-mounted version: Ella IN 1.0, Casambi-compatible version, controllable with the Casambi app, available on request
-------	--



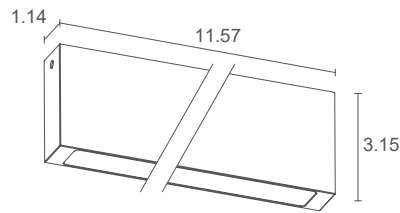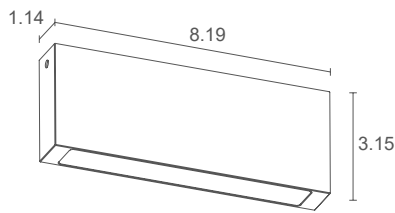

ELLO IN 2.0



13W 24VDC

EP2010 **D B N** White
EP2010 **D C N** Chrome
EP2010 **D 1 N** Pure orange
EP2010 **D 2 N** Reseda green
EP2010 **D 3 N** Capri blue
EP2010 **D 4 N** Light ivory

F - 2700K
5 - 3000K
9 - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminum
 lens in serigraphed extra-clear microprismatic glass


remote power supply required, not included

surface mounted (ceiling)

see accessories page

outdoor version: Ello OUT 2.0,
 wall-mounted version: Ella IN 2.0,
 Casambi-compatible version, controllable with
 the Casambi app, available on request

ELLO IN 3.0



19W 24VDC

EP3010 **D B N** White
EP3010 **D C N** Chrome
EP3010 **D 1 N** Pure orange
EP3010 **D 2 N** Reseda green
EP3010 **D 3 N** Capri blue
EP3010 **D 4 N** Light ivory

F - 2700K
5 - 3000K
9 - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)


body in aluminum
 lens in serigraphed extra-clear microprismatic glass

remote power supply required, not included

surface mounted (ceiling)

see accessories page


outdoor version: Ello OUT 3.0,
 wall-mounted version: Ella IN 3.0,
 Casambi-compatible version, controllable with
 the Casambi app, available on request






ACCESSORIES


ACCESSORIES FOR INSTALLATION



WD0601B - White
WD0601C - Chrome
WD06011 - Pure orange
WD06012 - Reseda green
WD06013 - Capri blue
WD06014 - Light ivory
 Spacer for 15° inclination
 RAL finish available on request
 (Ello IN 1.0)

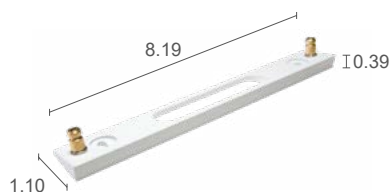

WD0602B - White
WD0602C - Chrome
WD06021 - Pure orange
WD06022 - Reseda green
WD06023 - Capri blue
WD06024 - Light ivory
 Spacer for 15° inclination
 RAL finish available on request
 (Ello IN 2.0)

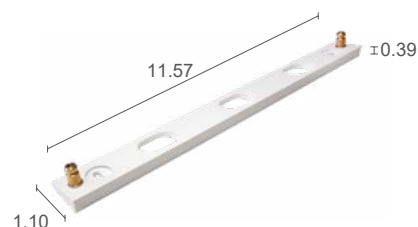

WD0603B - White
WD0603C - Chrome
WD06031 - Pure orange
WD06032 - Reseda green
WD06033 - Capri blue
WD06034 - Light ivory
 Spacer for 15° inclination
 RAL finish available on request
 (Ello IN 3.0)

✓
ELLO IN 1.0
 with spacer (15° inclination)



STANDARD FINISHES



White




Chrome



Pure orange



Reseda green



Capri blue



Light ivory

< **ELLO IN 3.0**
 3000K, 19W, white
 Private residence, Milan, Italy




ELLO IN / ELLO OUT

INDOOR CEILING MOUNTED / OUTDOOR CEILING MOUNTED


ELLO IN 1.0 ELLO OUT 1.0

D - Diffuse

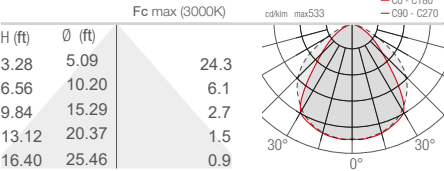

ELLO IN 2.0 ELLO OUT 2.0

D - Diffuse

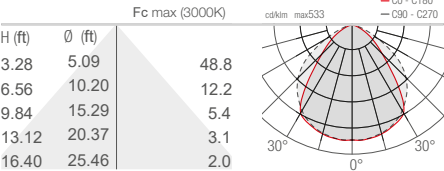

ELLO IN 3.0 ELLO OUT 3.0

D - Diffuse

