



Flori 1.2 is a compact floodlight with 5 standard optics, IP66 and with RGBW the fixture can be used in a wide variety of applications.

TECHNICAL DATA

Wattage / Input	13W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anti-corrosive aluminum alloy Lens: Tempered, serigraphed, transparent extra-clear glass Cable Length: 4.9' standard
CCT	RGBW (W=4000K)
CRI	CRI >80
BUG Rating	B0-U0-G0 (60°, 32°x61°, 61°x32°) B1-U0-G0 (24°, 33°)
Delivered Lumens	304 lm: (R) 52 lm, (G) 95 lm, (B) 31 lm, (W) 126 lm
Efficacy	23 lm/W
Optics	5 Standard (see below)
Finishes	4 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø 2.36" x 6.06" l x 5.79"
Fixture Weight	1.76 lbs
LED Source	1 RGBW LED group
Lumen Maintenance	L85,B10 >50,000hrs (Ta 25°C)
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK07
Vibration Test	Passed test at 3g acceleration / 30Hz frequency



Fixture Dimensions

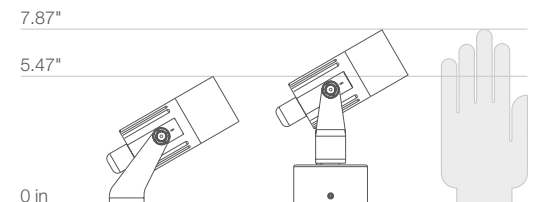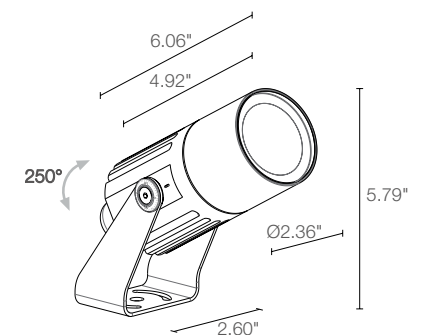

ORDERING INFORMATION

Example: FS12007SE or FS12007SE-1. Accessories / Power Supplies ordered separately.

FS1200	7			
Model No.	CCT	Optics	Finish	Cable Length
FS1200	7 - RGBW (W=4000K)	S - 24° M - 33° L - 60° W - 32° x 61° X - 61° x 32°	E - White F - Gray H - Anthracite T - Cor-ten C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX / RDM / DALI / 0-10V	120-277VAC to 24VDC, 100W, Class 2	1-6

For other power supply options consult factory.

ACCESSORIES

Installation




WP0100

Ground Spike
(Length 10.12")



WP1004

Fastener Strap
(Length 16.4")



WP1001__ (Length 19.69")

WP1002__ (Length 31.50")

Ground Spike with Bracket

Include one of the below finishes:

E - White
F - Gray
H - Anthracite
T - Cor-ten
C - Custom RAL



WP1003__


Wall Arm with Bracket (Length 20.28")

Include one of the below finishes:

E - White
F - Gray
H - Anthracite
T - Cor-ten
C - Custom RAL

ACCESSORIES

Anti-Glare



WH0203

Honeycomb Louvre



WB1001__

Standard Snoot

For Snoots include one of the below finishes:

E - White
F - Gray
H - Anthracite
T - Cor-ten
C - Custom RAL




WB1002__

Asymmetric Snoot

ACCESSORIES

Controllers (RGBW)



PPWD00570 - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately



WB1003N

Barn doors


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is CRI 80, 4000K


S - 24°

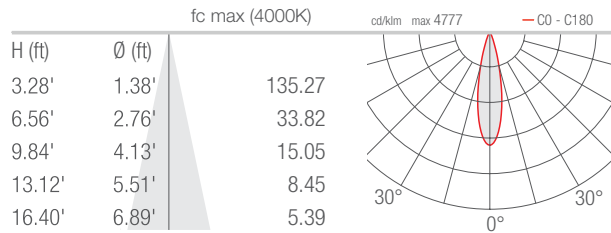


M - 33°

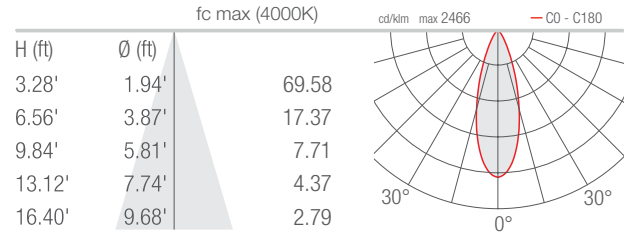



L - 60°

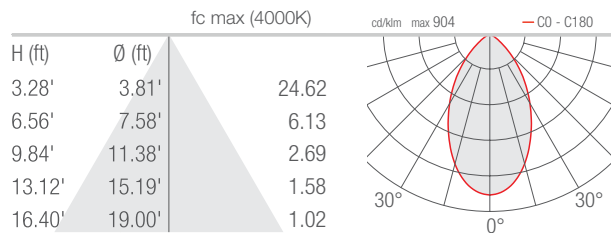


W - 32°x61°

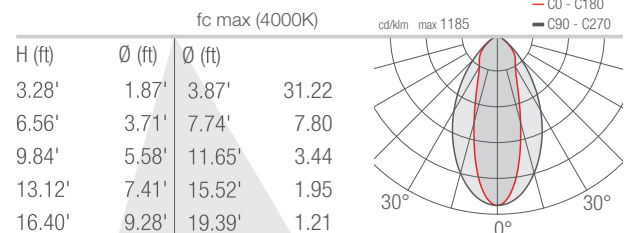

X - 61°x32°

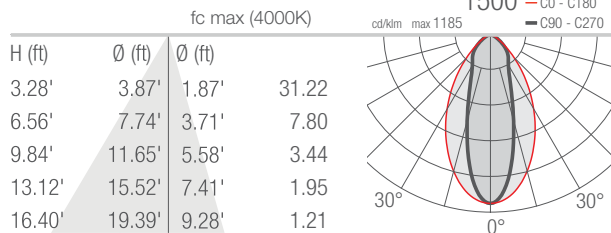

32°x61° Optics



61°x32° Optics

Job Name/Date:

Fixture Type Designation: