

Globe is a totally disappearing circular indoor recessed luminaire made of AirCoral® that creates a luminous circle with precise aim. It is suitable for installation on plasterboard or brick walls and ceilings. It has a 3000K standard color temperature with a 120° optic.

TECHNICAL DATA

Wattage / Input	6.5W (120VAC)
Power Supply	Integral
Construction	Body: AirCoral®
CCT	3000K 2700K, 4000K on request
CRI	>90
Delivered Lumens	374 lm (3000K)
Efficacy	57.5 lm/W
Optics	120°
Finishes	AirCoral® - suitable for painting
Fixture Dimensions	13.58" l x 4.33" w x 12.99" h
Cut-out Dimension	13.78" x 13.39"
Aperature	Ø7.87"
Fixture Weight	13.23 lbs
IP Rating	IP40

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

Additionally, AirCoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

ORDERING INFORMATION

Example: BU6289.27.AC.US.


BU6289		AC	US
Model No.	CCT	Finish	
BU6289	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US

Job Name/Date:

Fixture Type Designation:



Fixture Dimensions

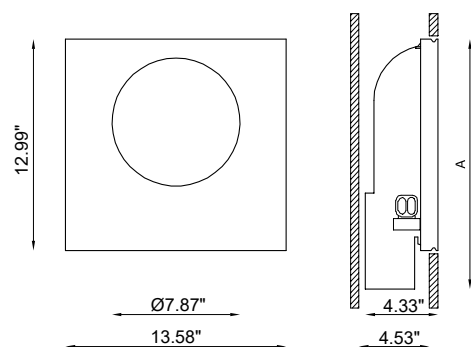

Mounting Orientations



6.5W - LED


6.5W - LED

6.5W - LED

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 157.2

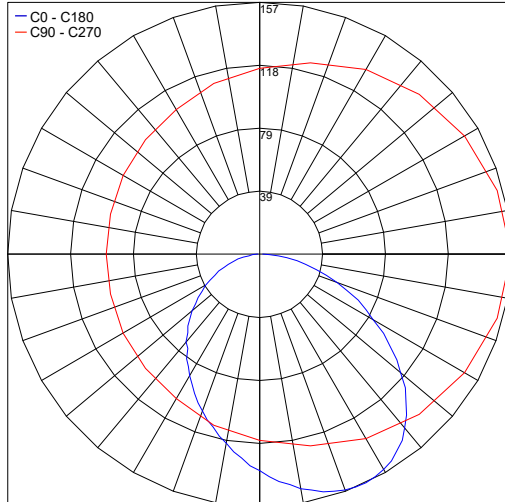

PHOTOMETRIC FILENAME : GLOBE BU6289.AC 6.5W 3000K.IES

Job Name/Date:

Fixture Type Designation: