

KUBOID 120

KUBOID is an adjustable, hexahedron cube luminaire that comes in 3 sizes and is suitable for outdoor installation on ceilings, walls, floors or in ground using steel stakes. KUBOID 120 is the medium version at 4.7" cubed and offers 4 light beam options and 4 standard finishes.



TECHNICAL DATA


Wattage	13.5W
Power Supply	Remote 700mA, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Opal Glass (diffuse version) Silk-screened Printed Glass (optics versions)
CCT	2700K, 3000K
BUG Rating	B0-U1-G0 (diffuse) B2-U1-G0 (optics)
CRI	>90
Delivered Lumens	1332 lm (30°, 3000K)
Efficacy	83.3 lm/W
Optics	Diffuse, Spot, Medium, Flood (see below) Adjustable $\pm 120^\circ$ - horizontal axis Adjustable 90° on the vertical one
Finishes	5 Standard, See Below
Fixture Dimensions	4.7" x 4.7"
Fixture Weight	5.07 lbs
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK08

ORDERING INFORMATION

Example: LNKB60PROMHBBZV.US. Accessories / Power Supplies ordered separately.

			BBZ		US
Model No.	Optics	CCT		Finish	
LNKB60PRO	S - 14° Spot M - 30° Medium F - 45° Flood	Y - 2700K H - 3000K	BBZ	L - Graphite V - Oxide G - Black U - White H - Gray	US
LNKB61PRO	D - Diffuse				

Fixture Dimensions

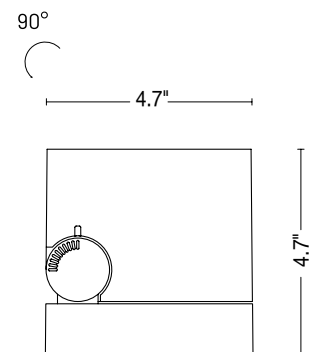

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00470	Phase Dim (120V only)	120VAC to 700mA, 14W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-1
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	2-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00515	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W, Class 2	1-1
PPLT00635	PEQ0E	PEQ0	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120/277VAC to 700mA, 20W, Class 2	1-1

For other power supply options consult factory.


ACCESSORIES - Installation



00AKB60-80

Steel fixing spike kit

ROTATION



Horizontal



Vertical


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 17909.3

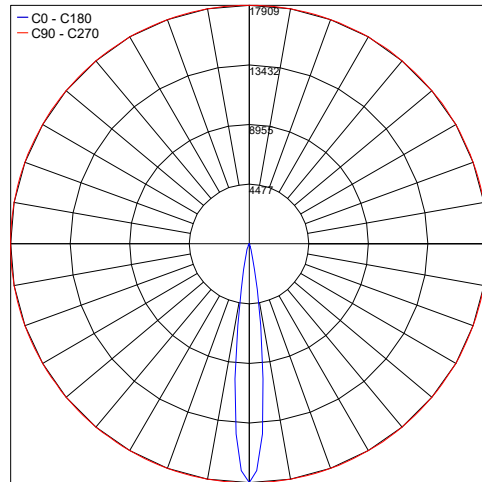


PHOTOMETRIC FILENAME : KUBOID 120 SPOT 30K - KB60PROSXB10X.IES

Maximum Candela = 3482.4

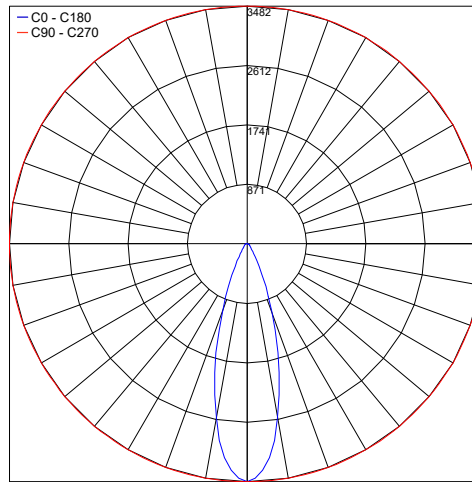


PHOTOMETRIC FILENAME : KUBOID 120 MEDIUM 30K - KB60PROMXB10X.IES

Maximum Candela = 2055.8

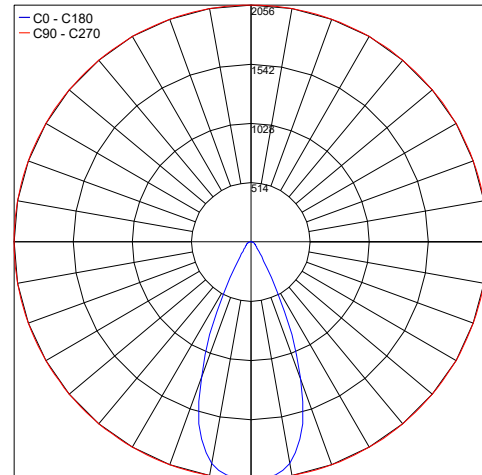

PHOTOMETRIC FILENAME : KUBOID 120 FLOOD 30K - KB60PROFXB10X.IES

Maximum Candela = 255.9

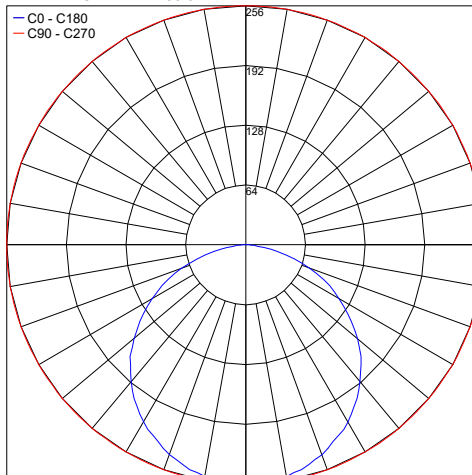

PHOTOMETRIC FILENAME : KUBOID 120 DIFFUSE 30K - KB61PRODXB1.IES

Job Name/Date:

Fixture Type Designation: