


KUBOID is an adjustable, hexahedron cube luminaire that comes in 3 sizes and is suitable for outdoor installation on ceilings, walls, floors or in ground using steel stakes. KUBOID 90 is the smallest version at 3.5" cubed and offers 4 light beam options and 4 standard finishes.



TECHNICAL DATA

Wattage	6W
Power Supply	Remote 24VDC, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Opal Glass (diffuse version) Silk-screened Printed Glass (optics versions)
CCT	2700K, 3000K
BUG Rating	B0-U1-G0 (diffuse) B1-U1-G0 (optics)
CRI	>90
Delivered Lumens	590 lm (30°, 3000K)
Efficacy	73.8 lm/W
Optics	Diffuse, Spot, Medium, Flood (see below) Adjustable ±120° - horizontal axis Adjustable 90° on the vertical one
Finishes	5 Standard, See Below
Fixture Dimensions	3.5" x 3.5"
Fixture Weight	2.43 lbs
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK08

Fixture Dimensions



ORDERING INFORMATION

Example: LNKB50PROMHBBZV.US. Accessories / Power Supplies ordered separately.

			BBZ		US
Model No.	Optics	CCT		Finish	
LNKB50PRO	S - 14° Spot M - 30° Medium F - 45° Flood	Y - 2700K H - 3000K	BBZ	L - Graphite V - Oxide G - Black U - White H - Gray	US
LNKB51PRO	D - Diffuse				

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-13
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-13

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-12

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures 6W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-12

For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

ACCESSORIES - Installation



00AKB50
Steel fixing spike kit

ROTATION



Horizontal



Vertical


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 8599

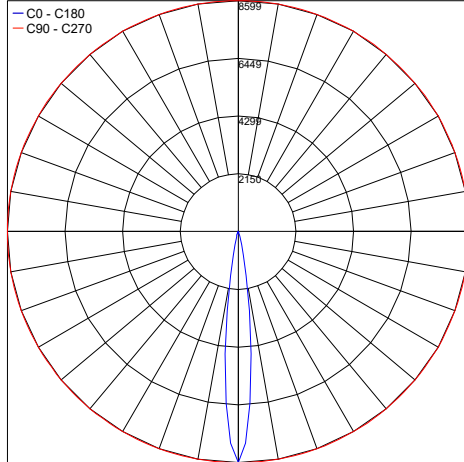


PHOTOMETRIC FILENAME : KUBOID 90 SPOT 30K - KB50PROSXB10X.IES

Maximum Candela = 1631.7

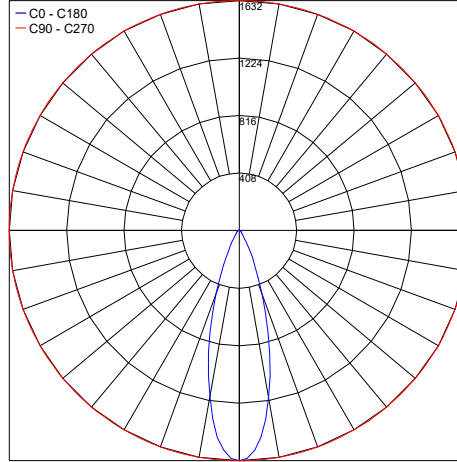


PHOTOMETRIC FILENAME : KUBOID 90 MEDIUM 30K - KB50PROMXB10X.IES

Maximum Candela = 923.5

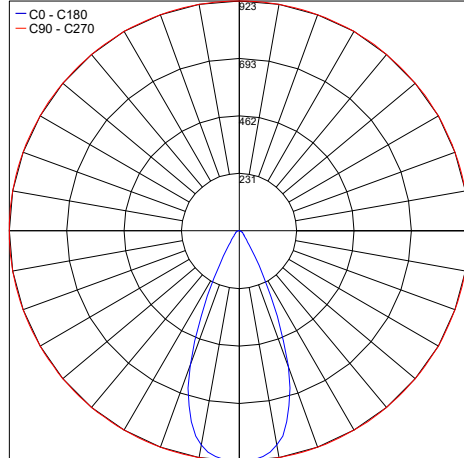

PHOTOMETRIC FILENAME : KUBOID 90 FLOOD 30K - KB50PROFXB10X.IES

Maximum Candela = 108.2

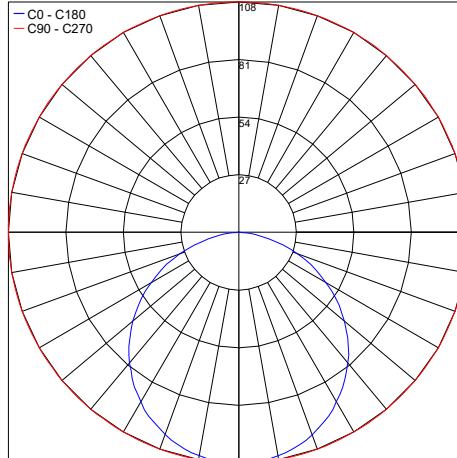

PHOTOMETRIC FILENAME : KUBOID 90 DIFFUSE 30K - KB51PRODXB10X.IES

Job Name/Date:

Fixture Type Designation: