


LEAF



Leaf

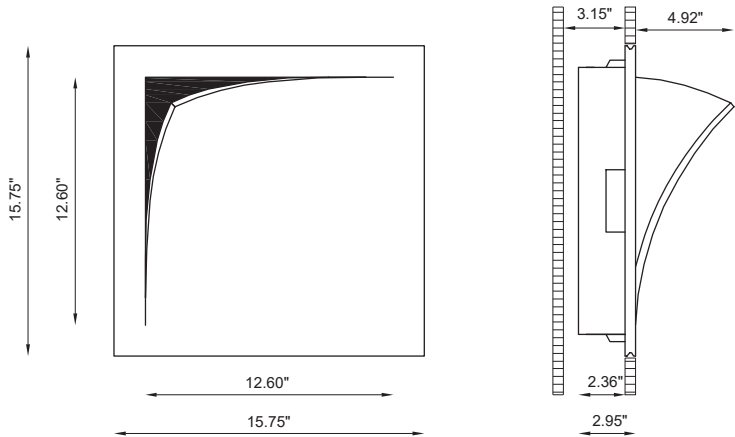

OTHER AVAILABLE CODES

BU2988.27.AC	<i>lens</i>	120°
	<i>light color</i>	2700K
BU2988.40.AC	<i>lens</i>	120°
	<i>light color</i>	4000K (on request)
BU2988.AC 2 00 M	<i>lens</i>	120°
	<i>dim. tech.</i>	
	1	1-10V
	DA	DALI
	<i>light color</i>	
	27	2700K
	30	3000K
	40	4000K (on request)

example of code composition

BU2988.AC 2 00 M **30 DA**

TECHNICAL FEATURES

Code	BU2988.AC
Type	Wall and ceiling half recessed
Material	AC: AirCoral®
Absorption capacity*	282.01 ft²
Weight	20.28 lbs
Mounting	Wall and ceiling mounting
IP rating	IP20
Control gear	Remote constant current driver
Cut out for plasterboard	16.14 × 16.14 in
Lamp type	LED 350mA
Lamp wattage	1 × 6.5W
Luminous efficacy	1 × 930 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Light hole	-
Voltage connection	220-240V · 50/60Hz
CRI	>90
Note	Trailing-edge and leading-edge dimming (20 - 100%).
	Other available type of dimming: 0-10V, DALI.
	Other available light colors: 2700K, 4000K (on request).

THE WALL MOLDS TO THE LIGHT

SUPERFUTUREDESIGN*

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²



Private Villa, Dubai | ASZ Architetti



Alessandro Borghese - Il Lusso della Semplicità, Venice | Arch. A. Canelli | ph. Le Michette Creative Studio

