

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

Slim, sleek and tough, the Rio Series illuminates ground, wall and ceiling installations with no dark zone between fixtures. Available in Static White or RGBW and with the use of the aluminum housing is driveover up to 11,000 lbs.

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: PMMA End Caps: 316L Stainless Steel Lens: Opal PMMA Housing: Aluminum or Stainless Steel
CCT	2600K, 2800K, 3700K, RGBW
CRI	>80
BUG Rating	B0-U1-G0 (2800K, 5W, 8W, 10W, 16W) B0-U1-G1 (2800K, 19W, 29W) B1-U1-G1 (2800K, 38W)
Delivered Lumens	See Chart on page 2.
Efficacy	30 lm/W (White), 18.5 lm/W (RGBW)
Optics	Diffuse
Finishes	N/A
Cut-Out Dimensions	See Chart on page 2.
Fixture Dimensions	See Chart on page 2.
Fixture Weight	See Chart on page 2.
LED Source	SMD Low Power (SW), SMD Full Color (RGBW)
Lumen Maintenance	L80 >50,000hrs
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP67
Impact Rating	IK10
Driveover	Up to 11,000 lbs (With aluminum housing)



Fixture Dimensions
See page 2 for drawings

ORDERING INFORMATION

Example: RE21005DB or RE21005DB-3. Accessories / Power Supplies ordered separately.

		DB	
Model No.	CCT	Optics	Cable Length
RE2000 - Rio 2.0	F - 2600K	DB - Diffuse	4.92' standard
RE2100 - Rio 2.1	5 - 2800K		1 - 16.40'
RE2200 - Rio 2.2	9 - 3700K		2 - 32.81' - not for use with RGBW
RE2300 - Rio 2.3	7 - RGBW		4 - 65.62' - not for use with RGBW
RE2400 - Rio 2.4			

Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

TECHNICAL DATA

	RIO 2.0		RIO 2.1		RIO 2.2	
	WHITE	RGBW	WHITE	RGBW	WHITE	RGBW
Wattage	5W	6W	10W	12W	19W	23W
Delivered Lumens (2800K)	145 lm	108 lm	290 lm	216 lm	580 lm	432 lm
Fixture Dim. (l,w,h)	10.24" x 1.46" x 2.20"		20.08" x 1.46" x 2.20"		39.76" x 1.46" x 2.20"	
Alum. Housing 3.31" Dim. (l,w,h) & Cut-Out Size (l,w)	10.39" x 1.65" x 3.31"		20.24" x 1.65" x 3.31"		39.92" x 1.65" x 3.31"	
	10.39" x 1.65"		20.24" x 1.65"		39.92" x 1.65"	
Alum. Housing 2.50" Dim. (l,w,h) & Cut-Out Size (l,w)	10.39" x 1.67" x 2.50"		20.24" x 1.67" x 2.50"		39.92" x 1.67" x 2.50"	
	10.39" x 1.67"		10.39" x 1.67"		10.39" x 1.67"	
SS Housing Dim. (l,w,h) & Cut-Out Size (l,w)	10.35" x 1.58" x 3.50"		20.20" x 1.58" x 3.50"		39.88" x 1.58" x 3.50"	
	10.35" x 1.58"		20.20" x 1.58"		39.88" x 1.58"	
Fixture Weight	0.88 lb		0.174 lb		3.44 lb	

	RIO 2.3		RIO 2.4	
	WHITE	RGBW	WHITE	RGBW
Wattage	29W	35W	38W	46W
Delivered Lumens (2800K)	870 lm	648 lm	1160 lm	864 lm
Fixture Dim. (l,w,h)	59.45" x 1.46" x 2.20"		79.13" x 1.46" x 2.20"	
Alum. Housing 3.31" Dim. (l,w,h) & Cut-Out Size (l,w)	59.65" x 1.65" x 3.31"		79.33" x 1.65" x 3.31"	
	59.65" x 1.65"		79.33" x 1.65"	
Alum. Housing 2.50" Dim. (l,w,h) & Cut-Out Size (l,w)	59.65" x 1.67" x 2.50"		79.33" x 1.67" x 2.50"	
	10.39" x 1.67"		10.39" x 1.67"	
SS Housing Dim. (l,w,h) & Cut-Out Size (l,w)	59.61" x 1.58" x 3.50"		79.29" x 1.58" x 3.50"	
	59.61" x 1.58"		79.29" x 1.58"	
Fixture Weight	5.16 lb		6.86 lb	


Job Name/Date:

Fixture Type Designation:


RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4


FIXTURE DIMENSIONS




RIO 2.0

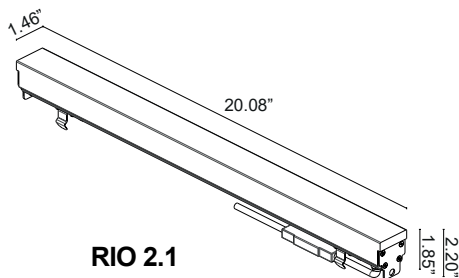


RIO 2.1

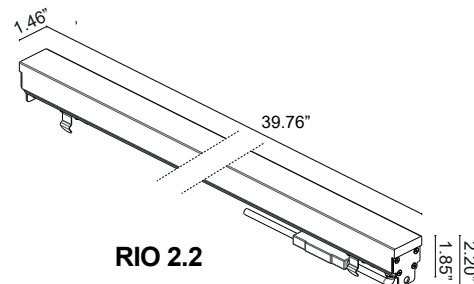

RIO 2.2

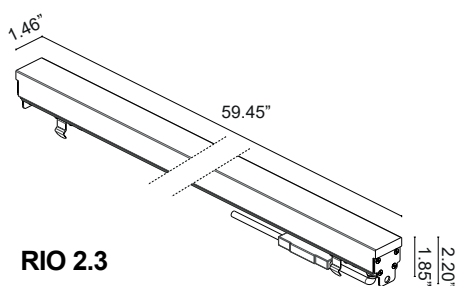

RIO 2.3

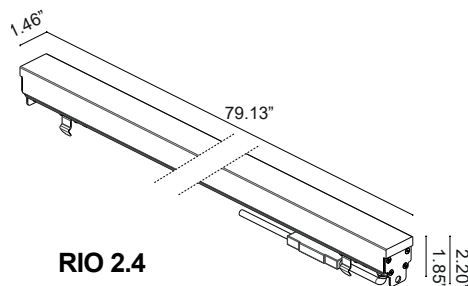

RIO 2.4

Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

SUGGESTED POWER SUPPLIES

STATIC WHITE, 24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply				
			Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-16	1-8	1-4	1-2	1-2
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W	2-16	1-8	1-4	1-2	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures / Power Supply				
						Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-6	1-3	1-1	1-1	-
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-15	1-7	1-4	1-2	1-2

DRIVERS IN NEMA ENCLOSURE

STATIC WHITE, Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures				
			Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-15	1-7	1-4	1-2	1-2

RGBW, 24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply				
			Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00288	DMX / RDM (Field Addressable) /Dali	120-277VAC to 24VDC, 100W, Class 2, DRY	1-13	1-6	1-3	1-2	1-1

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

ACCESSORIES - Installation



Aluminum Outer Casing

3.31" h

**Must use for Driveover applications*
(Aluminum has been treated to avoid corrosion when in contact with concrete.)


WC8220 - Rio 2.0 (L 10.39")

WC8221 - Rio 2.1 (L 20.24")

WC8222 - Rio 2.2 (L 39.92")

WC8223 - Rio 2.3 (L 59.65")

WC8224 - Rio 2.4 (L 79.33")



Stainless Steel Outer Casing

3.50" h


WC8250 - Rio 2.0 (L 10.35")

WC8251 - Rio 2.1 (L 20.20")

WC8252 - Rio 2.2 (L 39.88")

WC8253 - Rio 2.3 (L 59.61")

WC8254 - Rio 2.4 (L 79.29")

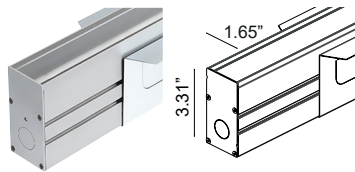

Aluminum Outer Casing

for Plasterboard

3.31" h

WC8420 - Rio 2.0 (L 10.39")

WC8421 - Rio 2.1 (L 20.24")


WC8422 - Rio 2.2 (L 39.92")

WC8423 - Rio 2.3 (L 59.65")

WC8424 - Rio 2.4 (L 79.33")

ACCESSORIES

Controllers (RGBW)



PPWD00570 - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi


Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

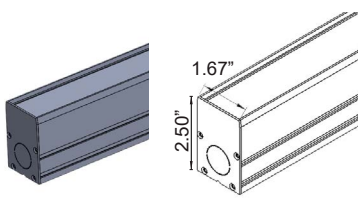

Aluminum Outer Casing

2.5" h

WCD920 - Rio 2.0 (L 10.39")

WCD921 - Rio 2.1 (L 20.24")

WCD922 - Rio 2.2 (L 39.92")

WCD923 - Rio 2.3 (L 59.65")

WCD924 - Rio 2.4 (L 79.33")

ACCESSORIES - Installation



WN8011 - Alignment Kit

For Stainless Steel Outer Casings



WN6005 - Alignment Kit

For Aluminum 3.31" Outer Casings



WND600525- Alignment Kit

For Aluminum 2.5" Outer Casings



WN6006 - Extractors (Pair)

To Remove Fixture from Outer Casings



WN8102 - Fixture Anti Fall Kit

Optional for Ceiling (and if desired Wall) Installations




WN6002 - U-Shaped Brackets (Pair)

For Plasterboard

PHOTOMETRIC DATA

D - Diffuse (Rio 2.0)

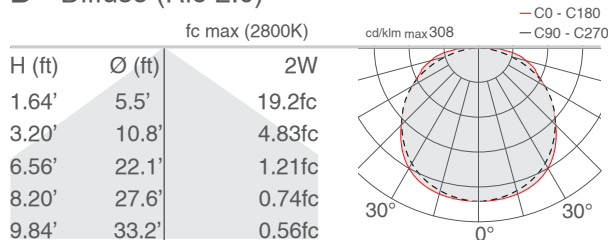

Job Name/Date:

Fixture Type Designation: