


# SECTOR 650

Sector 650 is a 25.6" height round bollard for outdoor surface installation with the option of 1 to 4 light windows: 90°, 180° (or 90° + 90°), 270°, 360°. It is available in 2 color temperatures and 2 standard finishes.



Fixture Dimensions

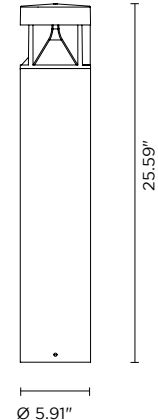

## TECHNICAL DATA

|                           |                                                                                            |
|---------------------------|--------------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 6W, 12W, 18W, 24W (120VAC)                                                                 |
| <b>Power Supply</b>       | Integral (0-10V Dimming)                                                                   |
| <b>Construction</b>       | Body: Extruded Copper-Free Aluminum<br>Lens: Opaline Tempered Glass<br>Cable Length: 3.28' |
| <b>CCT</b>                | 3000K, 4000K                                                                               |
| <b>BUG Rating</b>         | B0-U2-G1 (6W, 3000K)<br>B0-U3-G1 (24W, 3000K)                                              |
| <b>Delivered Lumens</b>   | 553 lm (6W, 3000K)<br>1067 lm (12W, 3000K)<br>1600 lm (18W, 3000K)<br>2134 lm (24W, 3000K) |
| <b>Efficacy</b>           | 92.2 lm/W (6W, 3000K)<br>88.9 lm/W (12W, 18W, 24W, 3000K)                                  |
| <b>Optics</b>             | 90°, 180° (or 90° + 90°), 270°, 360°                                                       |
| <b>Finishes</b>           | Textured Gray, Anthracite Gray,<br>Matte Black (on request)                                |
| <b>Fixture Dimensions</b> | Ø5.91" x 25.59"                                                                            |
| <b>LED Source</b>         | 1 x CREE LED                                                                               |
| <b>Fixture Weight</b>     | 13.23 lbs                                                                                  |
| <b>IP Rating</b>          | IP66                                                                                       |
| <b>IK Rating</b>          | IK10                                                                                       |

## ORDERING INFORMATION


*Example: 601708P-30K-AG. Accessories ordered separately.*

|                                |   |             |   |                               |
|--------------------------------|---|-------------|---|-------------------------------|
|                                | - |             | - |                               |
| <b>Model No.</b>               |   | <b>CCT</b>  |   | <b>Finish</b>                 |
| 601705P (6W, 90°)              |   | 30K - 3000K |   | TG - Textured Gray            |
| 601706P (12W, 180° or 90°x90°) |   | 40K - 4000K |   | AG - Anthracite Gray          |
| 601707P (18W, 270°)            |   |             |   | MB - Matte Black (on request) |
| 601708P (24W, 360°)            |   |             |   |                               |


Job Name/Date:

Fixture Type Designation:

## LIGHT DISTRIBUTIONS

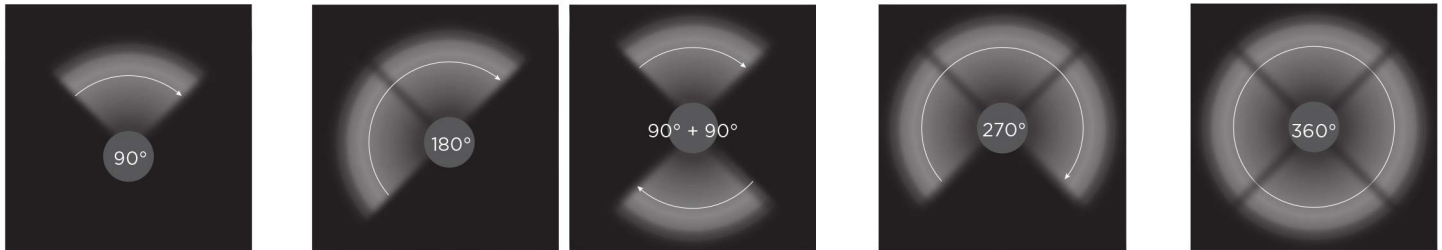


## ACCESSORIES - Installation



**AC053**  
Base Plate

## PHOTOMETRIC DATA

*Note: all photometry is 3000K*

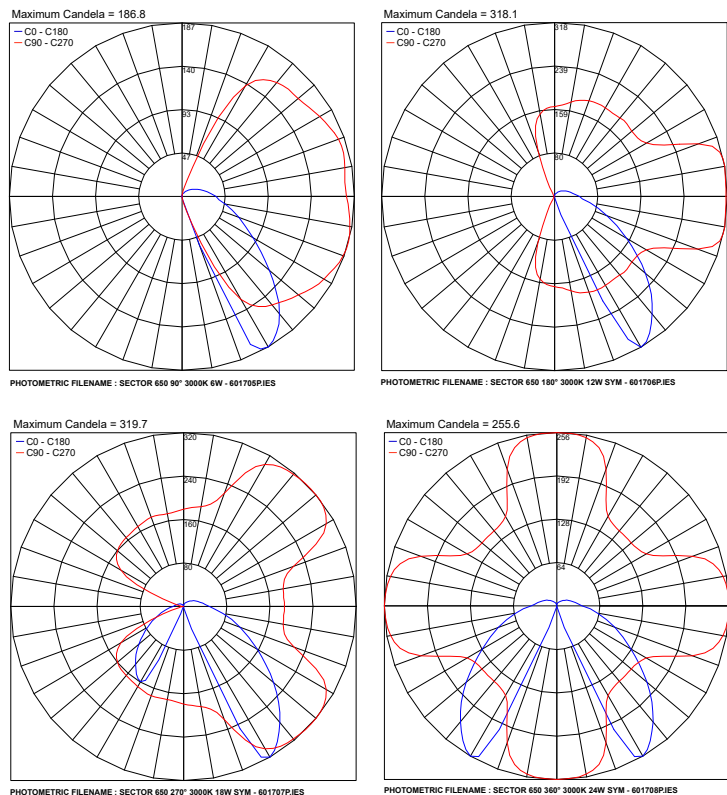

Job Name/Date:

Fixture Type Designation: