


Siri is a line of spotlights for indoor and outdoor applications with outstanding design featuring rounded angles. The scaled and adjustable bracket allows multiple installations on ceiling, wall, and floor.

TECHNICAL DATA

Wattage / Input	33W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Tempered, Serigraphed Extra-Clear Glass Cable Length: 4.92'
CCT	RGBW (4000K)
CRI	>80
BUG Rating	B1-U1-G0 (58°, 30° x 60°, 60° x 30°) B2-U1-G0 (21°, 32°)
Delivered Lumens	1532 lm: (R) 240 lm, (G) 423 lm, (B) 170 lm, (W) 699 lm (32°)
Efficacy	46.4 lm/W (32°)
Optics	5 Standard (see below)
Finishes	4 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	1.89" l x 7.44" w x 11.14" h
Fixture Weight	4.54 lbs
LED Source	9 LED RGBW groups
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK06



Fixture Dimensions



ORDERING INFORMATION

Example: SR32007ME or SR32007ME-1. Accessories / Power Supplies ordered separately.

SR3200	7			-	
Model No.	CCT	Optics	Finish	Cable Length	
SR3200	7 - RGBW	S - 21° M - 32° L - 58° W - 30° x 60° X - 60° x 30°	E - White F - Gray H - Anthracite T - Cor-ten C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40' 2 - 32.81' 3 - 49.21' 4 - 65.62'	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - RGBW


Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX / RDM / DALI / 0-10V	120-277VAC to 24VDC, 100W, Class 2	1-2

*For other power supply options consult factory.***ACCESSORIES****Installation****WP0300**

Ground Spike

ACCESSORIES**Anti-Glare****WB5030H**


Anti-glare hood

*On request the finish can match the fixture***ACCESSORIES****Controllers (RGBW)****[PPWD00570](#) - RGBW DMX512+Wifi Controller***Touch Sensitive**Can be controlled by WiFi**Controls 3 zones synchronously and separately**Job Name/Date:**Fixture Type Designation:*


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 21°

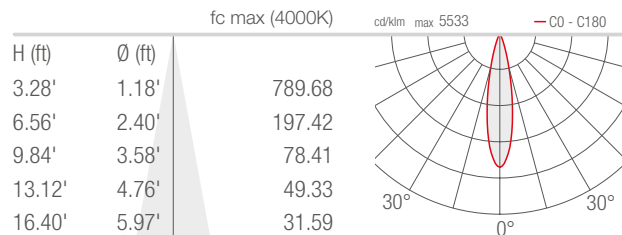


M - 32°

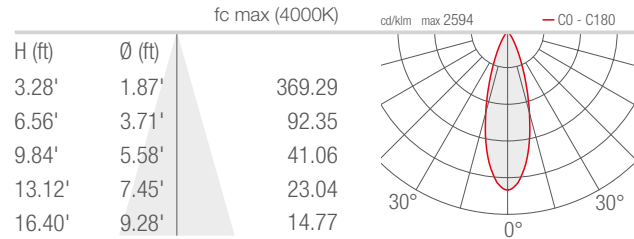


L - 58°

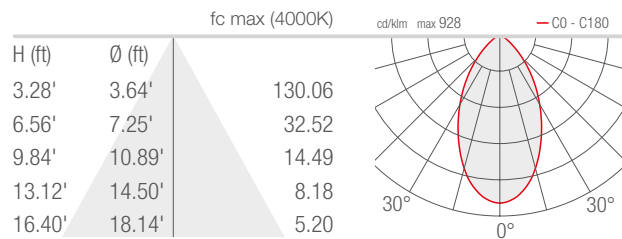

W - 30°x60°

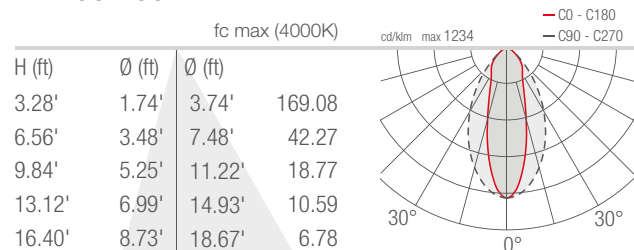

X - 60°x30°

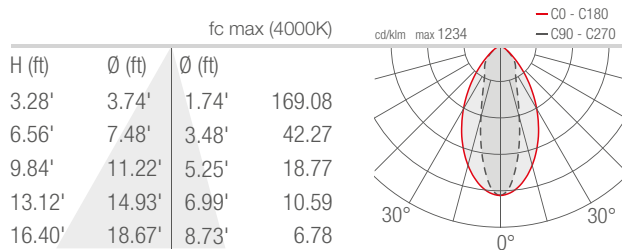

Job Name/Date:

Fixture Type Designation: