

OUTDOOR PROJECTORS ARCHITECTURAL LIGHTING FOR FACADES

2700K 3000K 4000K



ultra-narrow



narrow



medium



wide



elliptical



SIRI 1.0
9W 24VDC
ON/OFF



SIRI 2.0
16W 24VDC
ON/OFF



SIRI 3.0
23W 24VDC
ON/OFF, 0-10V



SIRI 1.1
9W 24VDC
ON/OFF



SIRI 2.1
16W 24VDC
ON/OFF



SIRI 3.1
23W 24VDC
ON/OFF, 0-10V



RGBW



narrow



medium



wide



elliptical



SIRI 1.2
11W 24VDC



SIRI 2.2
20W 24VDC



SIRI 3.2
33W 24VDC



SIRI 1.3
11W 24VDC



SIRI 2.3
20W 24VDC



SIRI 3.3
33W 24VDC

< SIRI 2.0

16W, 4000K, 30°, cor-ten
16W, 4000K, 40°, cor-ten

Carballeira de Moraña
Moraña, Pontevedra, Spain



RGBW
VERSION



IP66
SUITABLE FOR OUTDOOR
APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:
IPS
INTELLIGENT PROTECTION SYSTEM



PID
PROTECTIVE IMPEDANCE DEVICE
(WHITE LED COLOR)



NTC
BUILT-IN TEMPERATURE SENSOR
(SIRI 3.0 / 3.1)



6-STEP MATERIAL PROTECTION,
AND OXIDATION AND
CORROSION RESISTANCE
Low-copper-content aluminum alloy EN AB 47100
Preparation for painting
Epoxy paint
Polyester paint
Paints compliant with
Qualicoat automotive coating standard
Salt spray tested (over 1000 hours)



IK06 (SIRI 2/3)
IK07 (SIRI 1)
SCREEN IN 0.16-in-THICK, TRANSPARENT
EXTRA-CLEAR GLASS, TEMPERED
FOR EXCELLENT RESISTANCE
TO KNOCKS AND SCRATCHES.
HIGH-TRANSMITTANCE VITRIFIED SERIGRAPHY
ENSURES CHROMATIC UNIFORMITY

BODY IN DIE-CAST LOW-COPPER-CONTENT
ALUMINUM EN AB 47100
FOR EXCELLENT RESISTANCE
TO CORROSION





UNIQUE SELLING POINTS



RAL FINISH
ON REQUEST



WHITE




GREY



ANTHRACITE



THE 6° OPTICS MEAN THE BEAM CAN BE CONCENTRATED ON A SMALL AREA EVEN AT LARGE DISTANCES



INTEGRATED BASE FOR CONNECTIONS, AND PLATE ADJUSTABLE THROUGH 35°



ANTI-GLARE
RECESSED OPTICS





SCALED, ADJUSTABLE
BRACKET




LUMEN OUTPUT AT SOURCE	603 lm (3000K)
DELIVERED LUMEN OUTPUT	422 lm (3000K, 30°)
NO. AND TYPE OF LED	2 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see accessories page
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request

603 lm (3000K)
422 lm (3000K, 30°)
2 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
remote power supply required, not included
surface mounted (ceiling, wall, ground)
see accessories page
Casambi-compatible version, controllable with the Casambi app, available on request






30°x60° optics



60°x30° optics

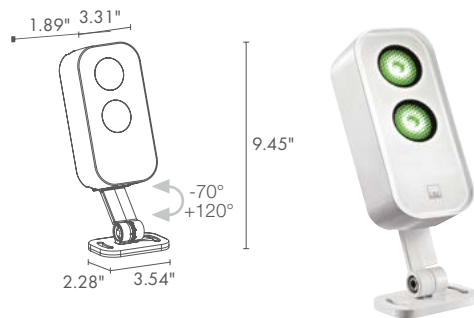

SIRI 1.2



IP66 IK07



POWER / MODEL CODE

11W 24VDC
SR1200 7 E White
SR1200 7 F Grey
SR1200 7 H Anthracite
SR1200 7 T Cor-ten

OPTICS

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOR

RGBW

LUMEN OUTPUT AT SOURCE	536 lm, R: 83 lm G: 150 lm B: 60 lm W: 243 lm (4000K)
DELIVERED LUMEN OUTPUT	379 lm, R: 59 lm G: 105 lm B: 42 lm W: 173 lm (4000K, 32°)
NO. AND TYPE OF LED	2 RGBW LED groups 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92 ft FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25 in
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see accessories page

SIRI 1.3



IP66 IK07




11W 24VDC
SR1300 7 E White
SR1300 7 F Grey
SR1300 7 H Anthracite
SR1300 7 T Cor-ten


S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOR


RGBW

LUMEN OUTPUT AT SOURCE	536 lm, R: 83 lm G: 150 lm B: 60 lm W: 243 lm (4000K)
DELIVERED LUMEN OUTPUT	379 lm, R: 59 lm G: 105 lm B: 42 lm W: 173 lm (4000K, 32°)
NO. AND TYPE OF LED	2 RGBW LED groups 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92 ft FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25 in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see accessories page



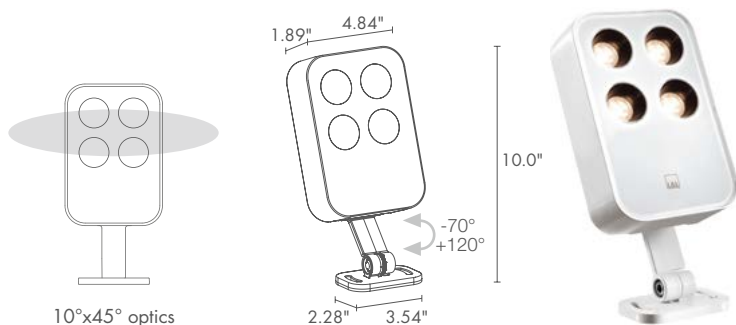

SIRI 2.0



POWER / MODEL CODE


16W 24VDC
SR2010 ■ ■ ■ E - White
SR2010 ■ ■ ■ F - Grey
SR2010 ■ ■ ■ H - Anthracite
SR2010 ■ ■ ■ T - Cor-ten

■ LED COLOR	F - 2700K S - 3000K 9 - 4000K
■ OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
■ POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 3x1.00 Ø0.28 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

LUMEN OUTPUT AT SOURCE	1311 lm (3000K)
DELIVERED LUMEN OUTPUT	925 lm (3000K, 30°)
NO. AND TYPE OF LED	4 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see accessories page
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request



SIRI 2.1






16W 24VDC
SR2110 ■ ■ ■ E White
SR2110 ■ ■ ■ F Grey
SR2110 ■ ■ ■ H Anthracite
SR2110 ■ ■ ■ T Cor-ten

■ LED COLOR	F - 2700K S - 3000K 9 - 4000K
■ OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
	includes 4.92 ft neoprene cable H05RN-F 3x1.00 Ø0.28 in

LUMEN OUTPUT AT SOURCE	1311 lm (3000K)
DELIVERED LUMEN OUTPUT	925 lm (3000K, 30°)
NO. AND TYPE OF LED	4 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see accessories page
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request



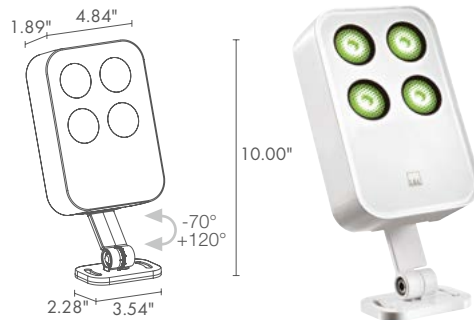

SIRI 2.2



IP66 IK06



POWER / MODEL CODE

20W 24VDC
SR2200 7 ■ E White
SR2200 7 ■ F Grey
SR2200 7 ■ H Anthracite
SR2200 7 ■ T Cor-ten

OPTICS

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOR

RGBW

LUMEN OUTPUT AT SOURCE 1059 lm, R: 165 lm G: 293 lm B: 118 lm
 W: 483 lm (4000K)

DELIVERED LUMEN OUTPUT 756 lm, R: 118 lm G: 209 lm B: 84 lm
 W: 345 lm (4000K, 32°)

NO. AND TYPE OF LED 4 RGBW LED groups
 50000h L90 B10 (Ta 25°C)

MATERIAL body in die-cast aluminum
 lens in serigraphed and transparent, tempered
 extra-clear glass

POWER SUPPLY UNIT remote power supply required, not included

POWER CABLES includes 4.92 ft FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25 in

MOUNTING surface mounted (ceiling, wall, ground, spike)

ACCESSORIES see accessories page



SIRI 2.3



IP66 IK06



20W 24VDC
SR2300 7 ■ E White
SR2300 7 ■ F Grey
SR2300 7 ■ H Anthracite
SR2300 7 ■ T Cor-ten

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOR

RGBW

1059 lm, R: 165 lm G: 293 lm B: 118 lm
 W: 483 lm (4000K)

756 lm, R: 118 lm G: 209 lm B: 84 lm
 W: 345 lm (4000K, 32°)

4 RGBW LED groups
 50000h L90 B10 (Ta 25°C)


body in die-cast aluminum
 lens in serigraphed and transparent, tempered
 extra-clear glass


remote power supply required, not included

includes 4.92 ft FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25 in

surface mounted (ceiling, wall, ground)


see accessories page







23W 24VDC ON/OFF	
SR3110	  E White
SR3110	  F Grey
SR3110	  H Anthracite
SR3110	  T Cor-ten
23W 24VDC 0-10V	
SR3110	  ER White
SR3110	  FR Grey
SR3110	  HR Anthracite
SR3110	  TR Cor-ten

2214 lm (3000K)
1491 lm (3000K, 30°)
9 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
remote power supply required, not included
surface mounted (ceiling, wall, ground)
see accessories page
Casambi-compatible version, controllable with the Casambi app, available on request





30°x60° optics



60°x30° optics



SIRI 3.2



IP66 IK06



POWER / MODEL CODE

33W 24VDC
SR3200 7 ■ E White
SR3200 7 ■ F Grey
SR3200 7 ■ H Anthracite
SR3200 7 ■ T Cor-ten

OPTICS

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOR

RGBW

LUMEN OUTPUT AT SOURCE	2148 lm, R: 336 lm G: 594 lm B: 238 lm W: 980 lm (4000K)
DELIVERED LUMEN OUTPUT	1532 lm, R: 240 lm G: 423 lm B: 170 lm W: 699 lm (4000K, 32°)
NO. AND TYPE OF LED	9 RGBW LED groups 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92 ft FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25 in
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see accessories page



SIRI 3.3



IP66 IK06



33W 24VDC
SR3300 7 ■ E White
SR3300 7 ■ F Grey
SR3300 7 ■ H Anthracite
SR3300 7 ■ T Cor-ten

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

RGBW

LUMEN OUTPUT AT SOURCE	2148 lm, R: 336 lm G: 594 lm B: 238 lm W: 980 lm (4000K)
DELIVERED LUMEN OUTPUT	1532 lm, R: 240 lm G: 423 lm B: 170 lm W: 699 lm (4000K, 32°)
NO. AND TYPE OF LED	9 RGBW LED groups 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92 ft FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø0.25 in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	none



White Grey Anthracite Cor-ten





ACCESSORIES

ANTI-GLARE ACCESSORIES



Honeycomb louvre
built into the lighting fixture

order together with the
lighting fixture

the honeycomb louvre can be fitted
on all optics except for the 6° optics



Anti-glare hood

the anti-glare hood is available on request
in the same finish as the lighting fixture

ACCESSORIES FOR INSTALLATION



Spike for
in-ground installation

SIRI 1.0	WH5010	WB5010H - Anthracite	3.50x3.54 in h 6.81 in	WP0300
SIRI 1.1	WH5010	WB5010H - Anthracite	3.50x3.54 in h 6.81 in	
SIRI 1.2		WB5010H - Anthracite	3.50x3.54 in h 6.81 in	WP0300
SIRI 1.3		WB5010H - Anthracite	3.50x3.54 in h 6.81 in	
SIRI 2.0	WH5020	WB5020H - Anthracite	5.00x3.54 in h 7.36 in	WP0300
SIRI 2.1	WH5020	WB5020H - Anthracite	5.00x3.54 in h 7.36 in	
SIRI 2.2		WB5020H - Anthracite	5.00x3.54 in h 7.36 in	WP0300
SIRI 2.3		WB5020H - Anthracite	5.00x3.54 in h 7.36 in	
SIRI 3.0	WH5030	WB5030H - Anthracite	6.85x3.98 in h 7.48 in	WP0300
SIRI 3.1	WH5030			
SIRI 3.2		WB5030H - Anthracite	6.85x3.98 in h 7.48 in	WP0300


< **SIRI 3.0**
3000K, 23W, 30°, white

Project by / Corinne Vezzoni & Associés
Light planning by / 8'18"
thecamp, Aix-en-Provence, France




SIRI 1.0 1.1


V - 6°

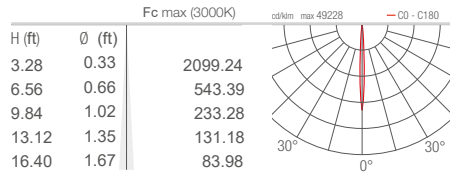


S - 12°

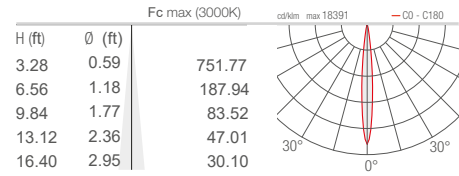


M - 30°

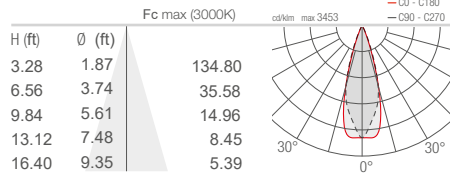

L - 40°

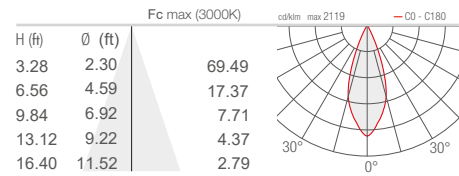


W - 10°x45°

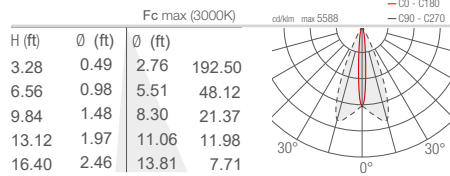


SIRI 1.2 1.3


S - 21°

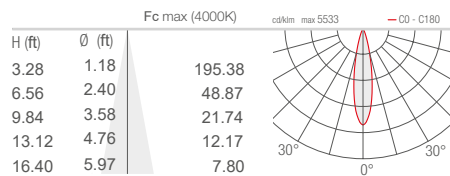


M - 32°

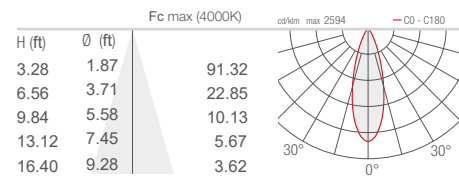


L - 58°

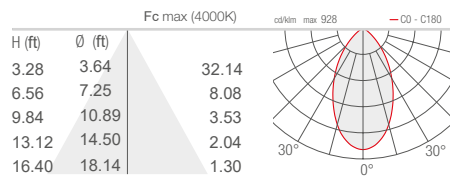

W - 30°x60°

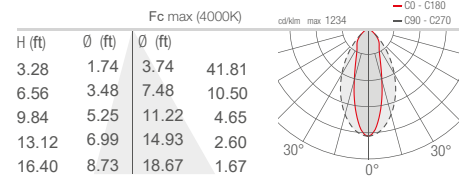


X - 60°x30°

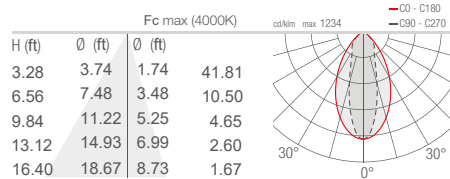


SIRI 2.0 2.1


V - 6°

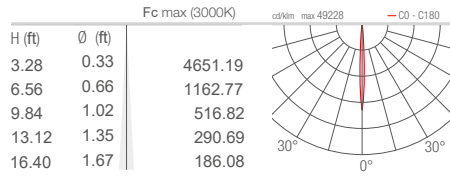


S - 12°

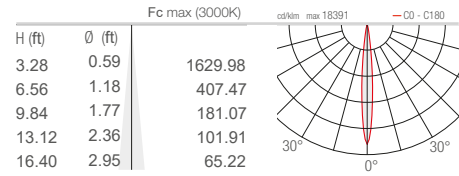


M - 30°

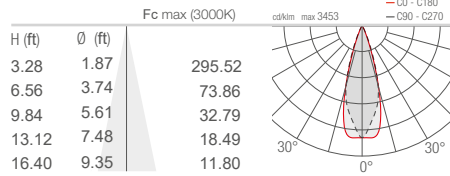

L - 40°

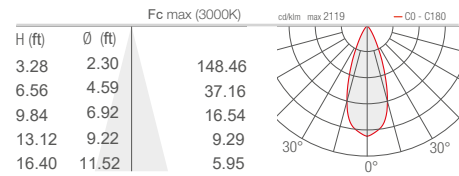


W - 10°x45°

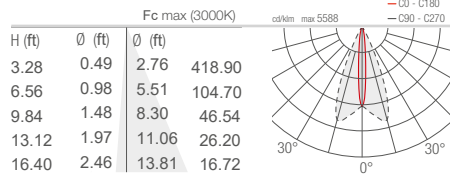


SIRI 2.2 2.3


S - 21°

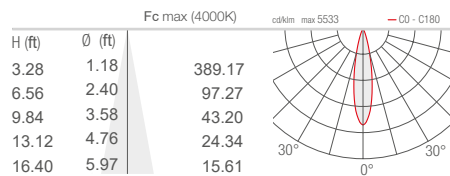


M - 32°

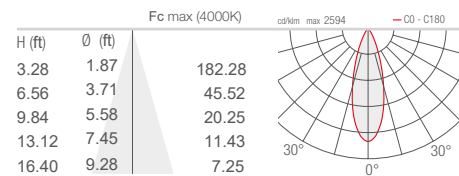


L - 58°

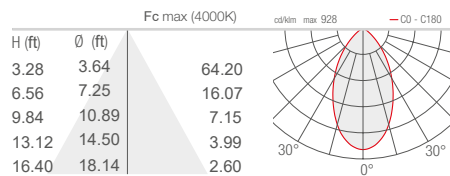

W - 30°x60°

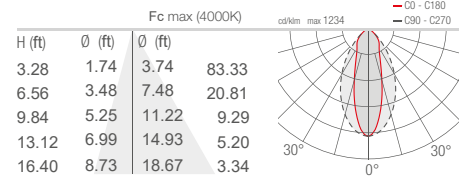


X - 60°x30°

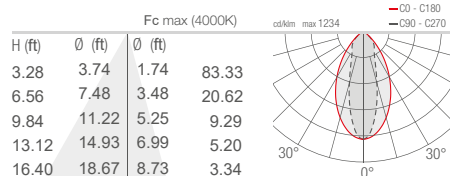


SIRI 3.0 3.1


V - 6°

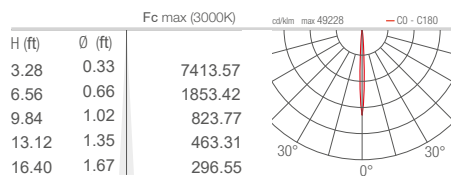


S - 12°

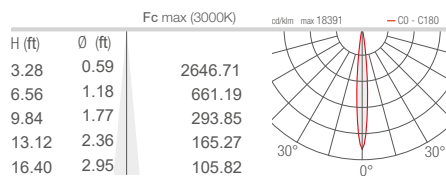


M - 30°

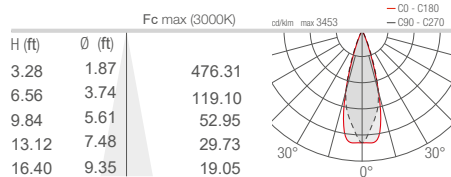

L - 40°

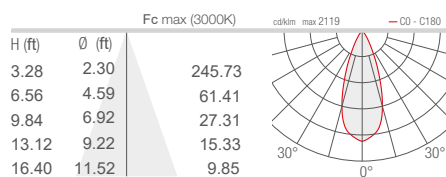


W - 10°x45°

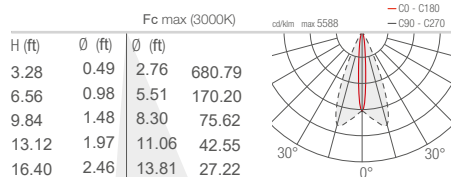


SIRI 3.2 3.3


S - 21°

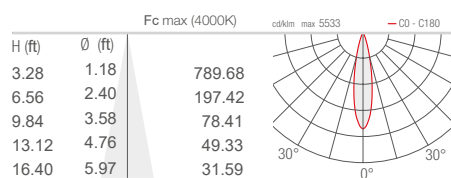


M - 32°

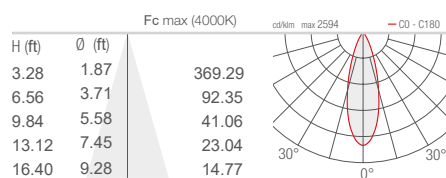

L - 58°

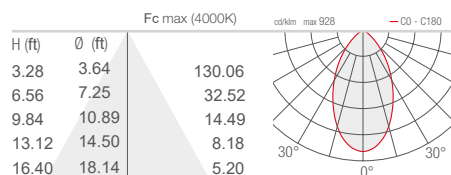

W - 30°x60°

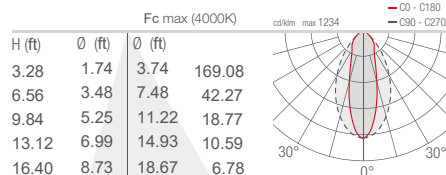

X - 60°x30°

