


The Spot 4.4 is a surface mounted, outdoor rated, compact floodlight. Available in white light with 4 optic options and 3 standard finishes. Not suitable for swimming pools or fountains.

TECHNICAL DATA

Wattage / Input	22W (24VDC)
Power Supply	Remote, not included. See page 2
Construction	Body: Anticorodal Aluminum Bracket: Aluminum Lens: Serigraphed-Gray & Transparent, Tempered Extra-Clear Glass Cable Length: 4.9' standard
CCT	2700K, 3000K, 4000K
CRI	80
BUG Rating	B2-U1-G0 (4000K, 24°) Other BUG Ratings available in IES Reports
Delivered Lumens	1923 lm (3000K, 15°, 22W)
Efficacy	87.4 lm/W (3000K, 15°, 22W)
Optics	4 Standard (see below)
Finishes	3 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø4.29" x 7.05" l x 8.27" h
Fixture Weight	5.51 lbs
LED Source	1 COB LED
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	2-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
IK Rating	IK08



Fixture Dimensions

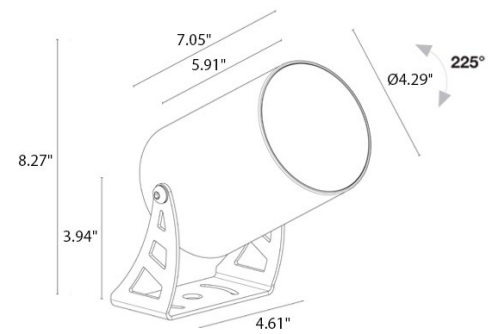

ORDERING INFORMATION

Example: CF4410000090ME. Accessories / Power Supplies ordered separately.

CF44100000			
Model No.	CCT	Optics	Finish
CF44100000	F - 2700K 5 - 3000K 9 - 4000K	0S - 15° 0M - 24° 0L - 32° 0J - 54°	H - Anthracite 5 - Jasper Green E - White C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures 22W
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-3
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-3

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-3

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-3

For other power supply options consult factory.

ACCESSORIES - Installation



WP0300
Ground Spike (15.6")

ACCESSORIES - Anti-Glare



WB1101_
Standard Snoot
For Snoots include one of the below finishes:
5 - Jasper Green
E - White
H - Anthracite



WB1102_
Asymmetrical Snoot
For Snoots include one of the below finishes:
5 - Jasper Green
E - White
H - Anthracite


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all photometry in 3000K

Maximum Candela = 22110

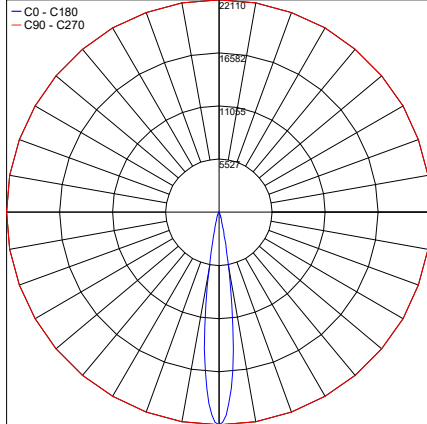


PHOTOMETRIC FILENAME : SPOT 4.4 S 15° [3000K 22W].IES

Maximum Candela = 28168.8

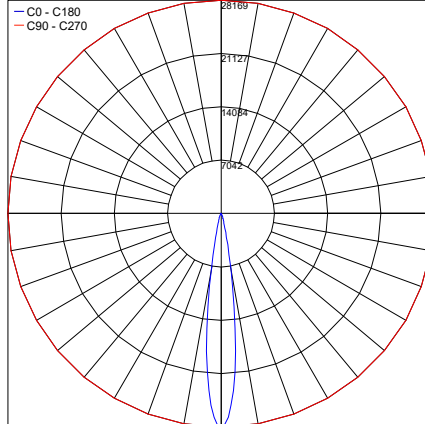


PHOTOMETRIC FILENAME : SPOT 4.4 S 15° [3000K 32W].IES

Maximum Candela = 9283

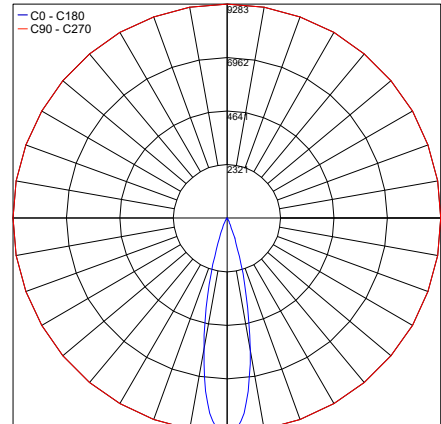


PHOTOMETRIC FILENAME : SPOT 4.4 M 24° [3000K 22W].IES

Maximum Candela = 11829.1

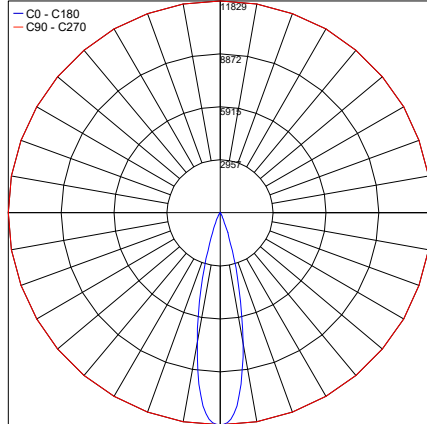


PHOTOMETRIC FILENAME : SPOT 4.4 M 24° [3000K 32W].IES

Maximum Candela = 5735.9

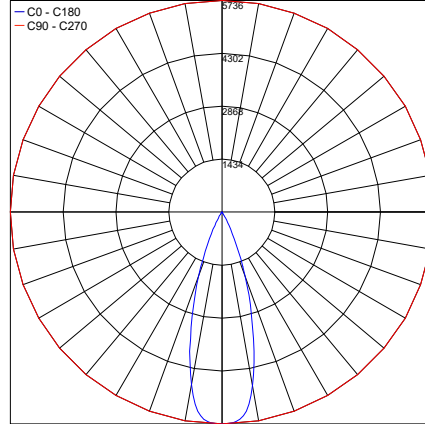


PHOTOMETRIC FILENAME : SPOT 4.4 L 32° [3000K 22W].IES

Maximum Candela = 7304.5

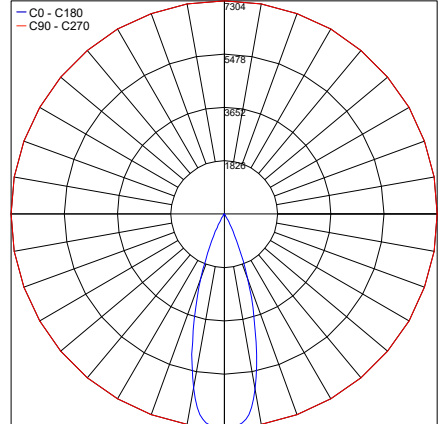


PHOTOMETRIC FILENAME : SPOT 4.4 L 32° [3000K 32W].IES

Maximum Candela = 2186.5

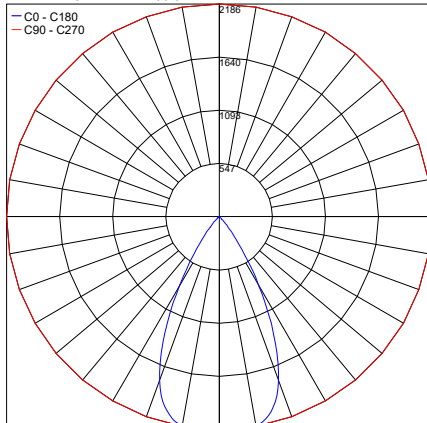

PHOTOMETRIC FILENAME : SPOT 4.4 J 54° [3000K 22W].IES

Maximum Candela = 2786.5

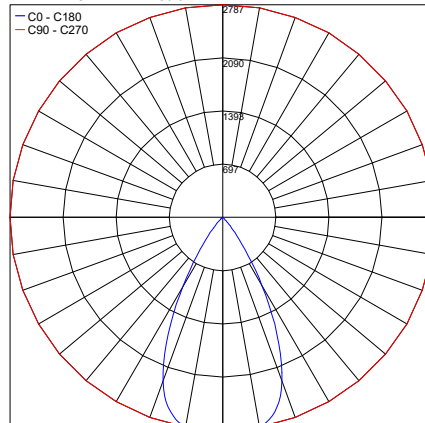

PHOTOMETRIC FILENAME : SPOT 4.4 J 54° [3000K 32W].IES

Job Name/Date:

Fixture Type Designation: