

STEP OUTSIDE 8.0



The Step Outside 8 is a surface mount wall-mounted luminaire, ideal for lighting pathways and stairs. Available in 5 fixture finishes and 2 coverplate finishes.

TECHNICAL DATA

Wattage / Input	2W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Die-Cast Aluminum Lens: Transparent Polycarbonate
CCT	3000K, 4000K, 5000K
CRI	>80
Delivered Lumens	8 lm (3000K, 500mA) per beam
Efficacy	4 lm/W
Optics	Diffuse
Finishes	5 Standard Fixture Finishes 2 Standard Coverplate Finishes Custom RAL (4 Stage Marine Grade Finish)
Fixture Dimensions	5.51" l x 0.51" w x 3.54" h
Fixture Weight	0.44 lbs
LED Source	1 Power LED
Lumen Maintenance	L90,B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP65
Impact Rating	—
JA8	Exempt



Fixture Dimensions
5.51" l x 0.51" w x 3.54" h



Fixture: white, grey, cor-ten, anthracite

Coverplate: white or stainless steel

ORDERING INFORMATION

Example: SP80009AE. Accessories / Power Supplies ordered separately.

SP8000		
Model No.	CCT	Finish (Fixture / Coverplate)
SP8000	5 - 3000K 9 - 4000K 0 - 5000K	AW - White / White AE - White / Stainless Steel AF - Grey / Stainless Steel AT - Cor-ten / Stainless Steel AH - Anthracite / Stainless Steel C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00586-16	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-16
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	5-40

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-38

For other power supply options consult factory.

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-38

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:



PHOTOMETRIC DATA

Note all Photometry is 3000K

A - Diffuse

h 11.81"



Isofc (3000K)

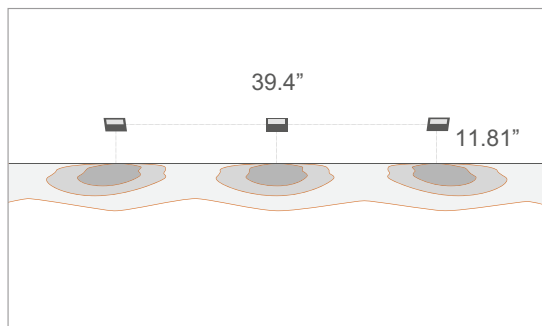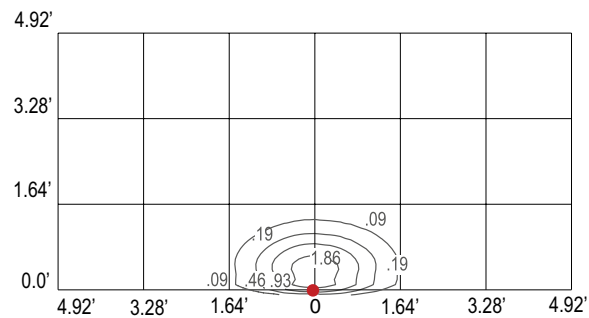

A - Diffuse

h 19.69"

Isofc (3000K)

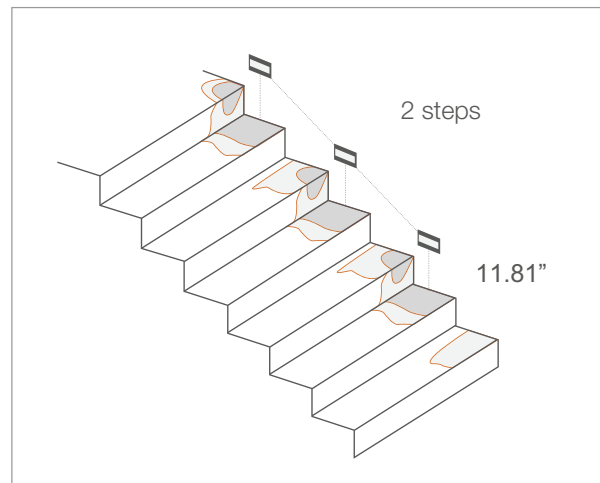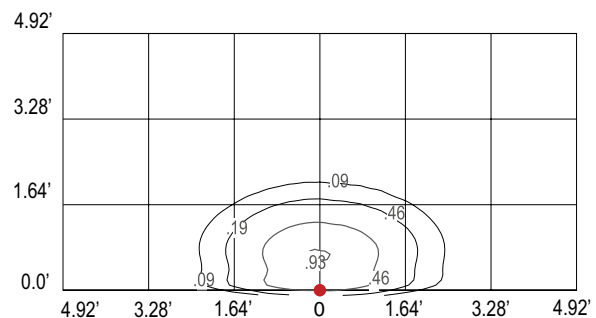

Job Name/Date:

Fixture Type Designation: