


Strap P 5.0 is a compact floodlight that combines RGB with White LED technology. With 6 standard optics and IP66 rating, the Strap P 5.0 is a versatile floodlight capable of a broad range of applications.

TECHNICAL DATA

Wattage / Input	39W (24VDC)
Power Supply	Remote, not included. See Page 2.
Construction	Body: Anti-corrosive aluminum alloy EN AB 47100 Trim: AISI 316L Stainless Steel Lens: Tempered, transparent extra-clear glass Cable Length: 4.92'
CCT	RGBW (W = 4000K)
CRI	>80
BUG Rating	B1-U1-G0 (60°, 32° x 61°, 61° x 32°) B2-U0-G0 (33°) B2-U1-G0 (24°, 66° x 11° adjustable)
Delivered Lumens	1216 lm: (R) 209 lm, (G) 380 lm, (B) 123 lm, (W) 504 lm (4000K, 33°)
Efficacy	31 lm/W (4000K, 33°)
Optics	6 Standard (see below)
Finish	Anthracite (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø 9.92" x 5.43"
Fixture Weight	13.23 lbs
LED Source	4 RGBW Power LED groups
Lumen Maintenance	L90,B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
Impact Rating	IK10



Fixture Dimensions

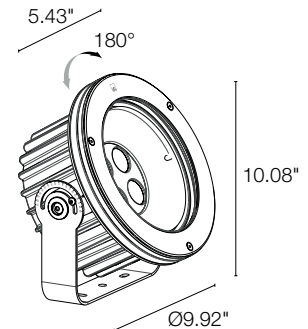

ORDERING INFORMATION

Example: PS50007MH. Accessories / Power Supplies ordered separately.

PS5000			H
Model No.	CRI	Optics	Finish
PS5000	7 - RGBW	S - 24° M - 33° L - 60° W - 32° x 61° Z - 61° x 32° X - 66° x 11° adjustable	H - Anthracite

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX / RDM / DALI / 0-10V	120-277VAC to 24VDC, 100W, Class 2	1-2

For other power supply options consult factory.

ACCESSORIES

Installation



WN7100

Anti-fall kit




WE0201

Magnet for adjustable optics

ACCESSORIES

Anti-Glare




WH0610

Honeycomb Louver

Not available for 66°x11°.

ACCESSORIES

Controllers (RGBW)



[PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 4000K, CRI 80


S - 24°

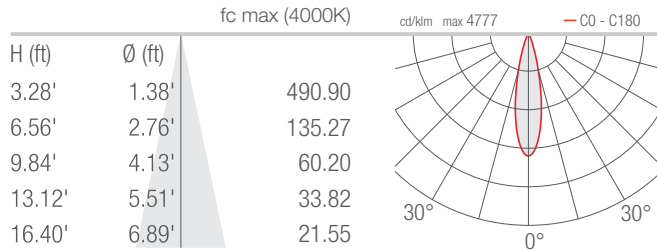


M - 33°

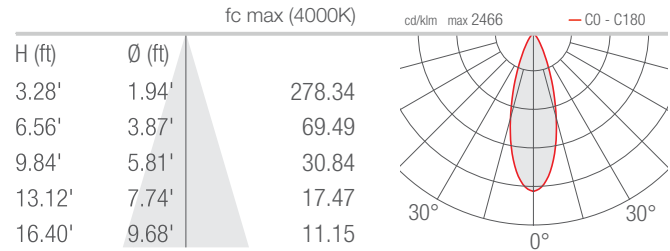


L - 60°

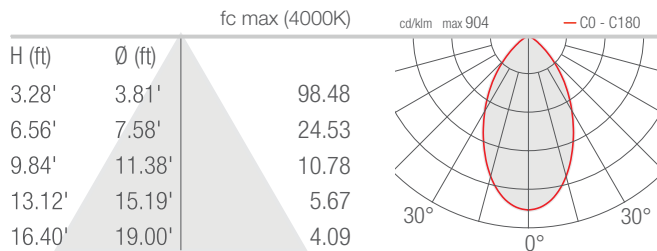


W - 32°x61°

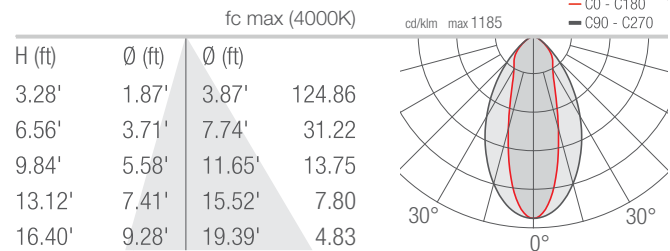

Z - 61°x32°

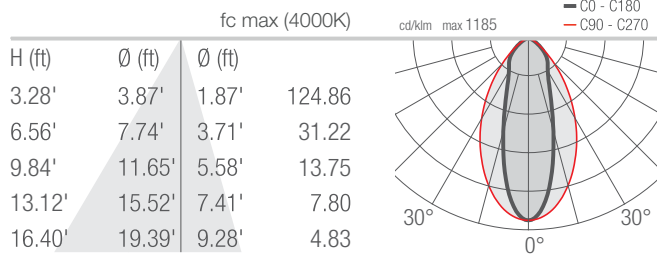

X - 66°x11° adjustable

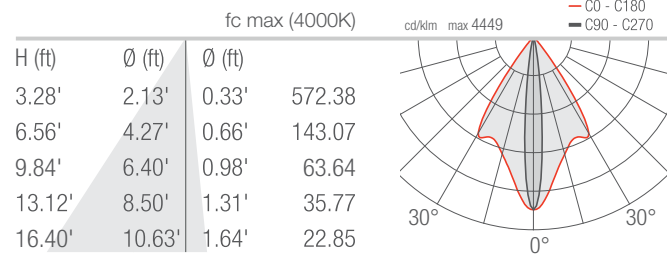

Job Name/Date:

Fixture Type Designation: