



READING LAMPS FOR HOSPITALITY AND PRIVATE HOMES



MOUNTED ON A SHELF

OPTICS VERSION

2700K 3000K 4000K 5000K




narrow medium wide



WALL 8.0
2W 500mA

✓
WALL 1
3000K, 2.5W, satin, customized version
with rear cable entry

Private collection, Milan, Italy
Courtesy of / Susanna Roda

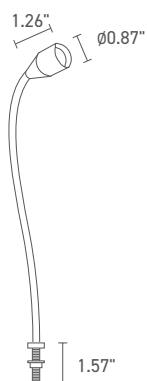

Flexible neck:
Ø0.31" - 15.75"



WALL 8.0



0.35 lbs

IP40

POWER / POWER SUPPLY MODEL NO.

2W 500mA 15.75"

PL801240   **C** Chrome

PL801240   **S** Satin

LED COLOR

F - 2700K

S - 3000K

9 - 4000K

0 - 5000K

OPTICS

S - 10°

M - 25°

L - 40°

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 103 lm (3000K, 500mA, 25°)

NO. AND TYPE OF LEDS 1 power LED
1/4 ANSI BIN, 50,000h L90 B10 (Ta 25°C)

MATERIAL body in aluminum, neck in brass

POWER SUPPLY UNIT **Power supply required**, not included

POWER CABLES includes 1.64 ft PVC cable
FROR 2x0.35 Ø0.14"

WIRING series

MOUNTING surface mounted (shelf max 1.18")

ACCESSORIES see accessories page

NOTES Casambi-compatible version, controllable with
the Casambi app, available on request

PHOTOMETRIC DATA see p. 5



ACCESSORIES

POWER CABLES

PVC cable

FROR 2x0.35 Ø0.14"

your choice of length

WF0110

(Wall 8.0)


order together with the lighting fixture

WALL


READING LAMPS

WALL 8.0

S - 10°

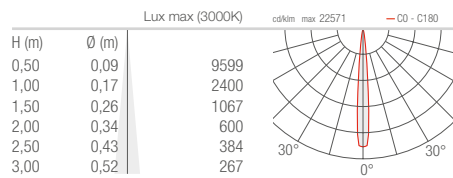

M - 25°

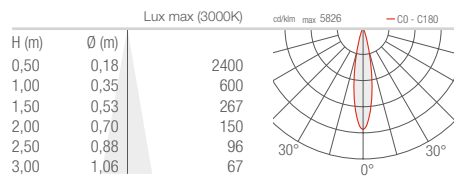

L - 40°

