


BERICA OUT 2.2


Berica Out is a family of single- or double-beam, surface-mounted outdoor fixtures with a minimalist design. It is available in 3 sizes and 3 different styles of cover - convex, flat and concave. Berica Out 2.2 is a flat, 25.2" version available in 3 color temperatures and 4 standard finishes, including primer.

TECHNICAL DATA

Wattage	30W per beam
Power Supply	Remote 1400mA, not included. See page 2.
Construction	Body/Cover: Anticorodal Aluminum
CCT	2200K, 2700K, 3000K, 4000K
CRI	80, >90
BUG Rating	B1-U5-G1 (CRI 80, Diff., Asym & >90, Diff., Assym, 62°x100°, 42°x102°) B2-U5-G1 (CRI 80, 62°x100°, 42°x102°)
Delivered Lumens	2533 lm per beam (3000K, Diffuse, CRI>90) 2980 lm per beam (3000K, Diffuse, CRI 80)
Efficacy	84.4 lm/W per beam (3000K, Diffuse, CRI>90) 99.3 lm/W per beam (3000K, Diffuse, CRI 80)
Optics	42°x102°, 62°x100°, Asymmetrical, Diffuse
Finishes	Primer, Anthracite, Cor-ten, White (4 Stage Marine Grade Finish)
Fixture Dimensions	25.20" l x 4.72" w x 1.89" deep
Fixture Weight	5.51 lbs
LED Source	48 Mid Power LEDs per beam
Lumen Maintenance	L80, B10 >50,000hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP65
Impact Resistance	IK07

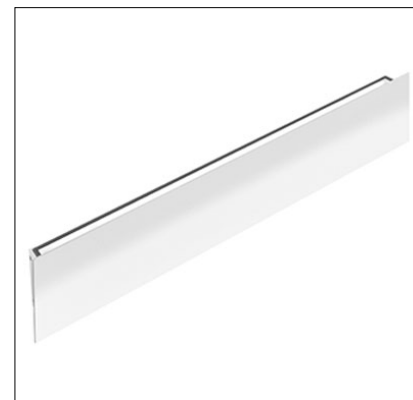

Fixture Dimensions

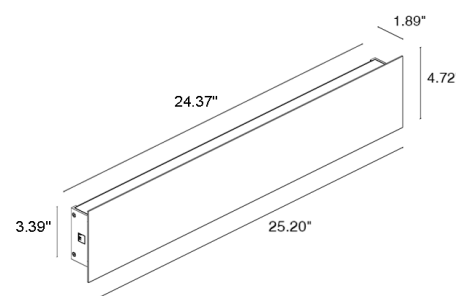

ORDERING INFORMATION

Example: BU221010005KW7. Power Supplies ordered separately.

Model #	CRI	CCT	Optics	Finish
BU2210 - Double Beam	0000 - CRI 80	N - 2200K	LW - 42°x102°	H - Anthracite
BU2211 - Single Beam	1000 - CRI >90	F - 2700K	KW - 62°x100°	T - Cor-ten
		5 - 3000K	0A - Asymmetrical	7 - Primer
		9 - 4000K	0D - Diffuse	E - White

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

1400mA - Double Beam

Part Number	Description	Input/Output	# of Fixtures
PPLT00558-P	0-10V Dimming to 0.1%	120-277VAC to 1400mA, 75W, Class 2	1-1





For other power supply options consult factory.

SUGGESTED POWER SUPPLIES

Single Beam - Consult Factory

PHOTOMETRIC DATA

Note all Photometry is 3000K, Double Beam Versions, CRI>90

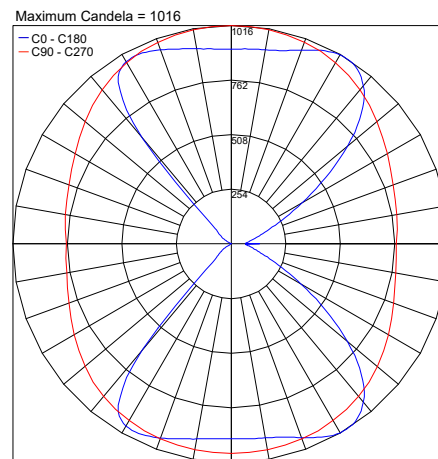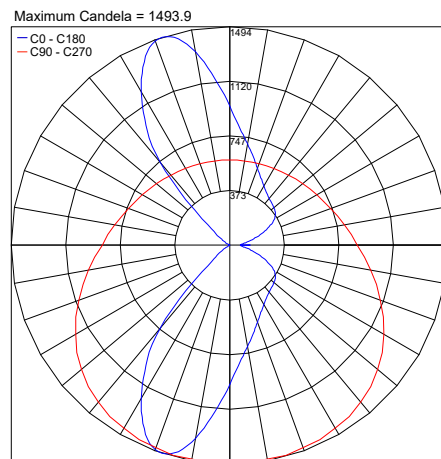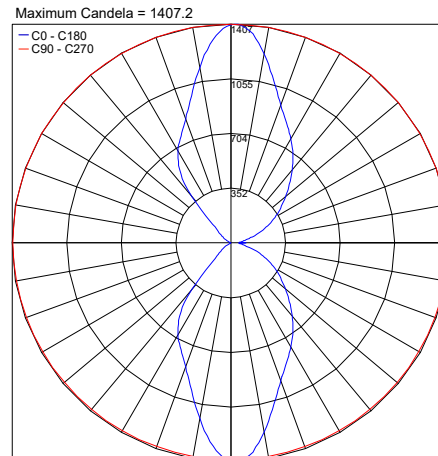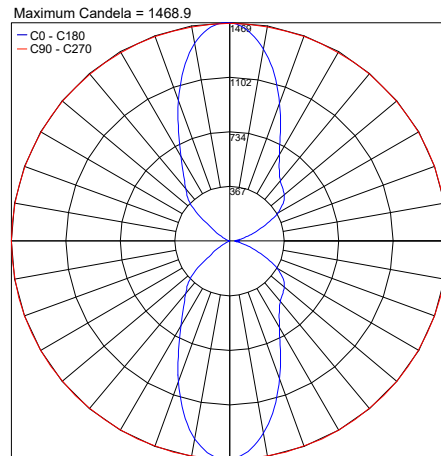


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: all Photometry is 3000K, Single Beam Versions

Maximum Candela = 1726.9

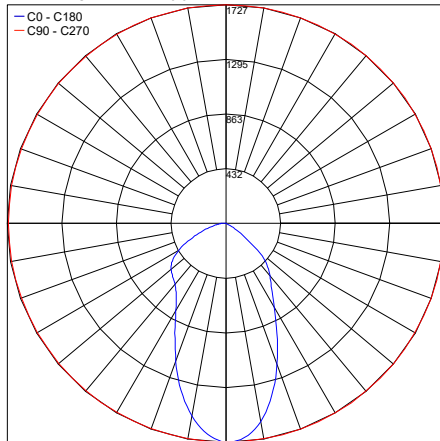


PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_L_42X102_3000K_CRI80_30W.IES

Maximum Candela = 1656.3

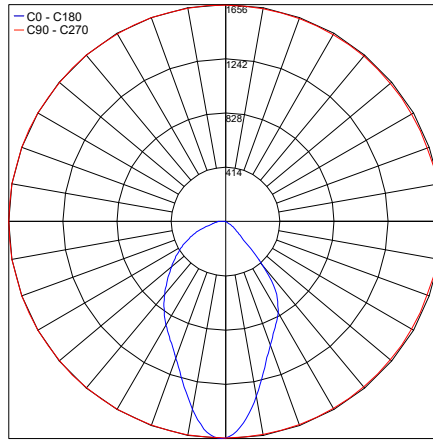


PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_K_62X100_3000K_CRI80_30W.IES

Maximum Candela = 1756.5

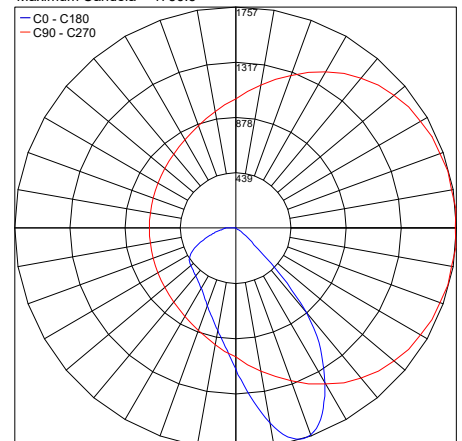


PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_A_3000K_CRI80_30W.IES

Maximum Candela = 1195.3

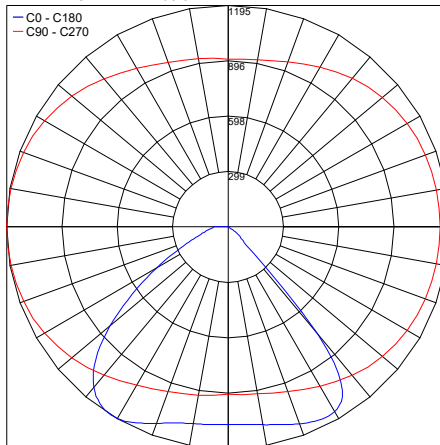


PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_D_3000K_CRI80_30W.IES

Maximum Candela = 1467.7

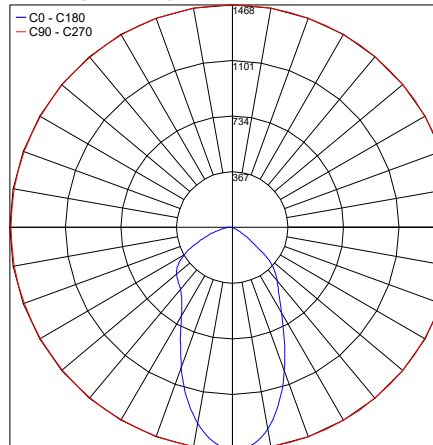


PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_L_42X102_3000K_CRI90_30W.IES

Maximum Candela = 1407.8

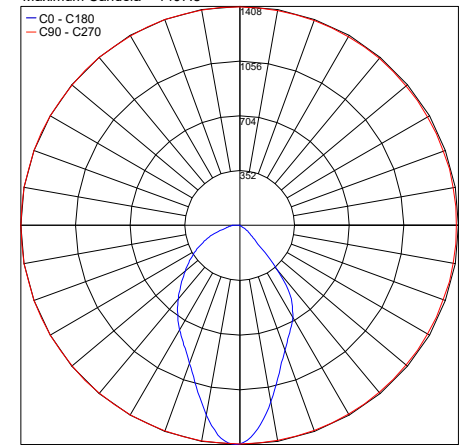


PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_K_62X100_3000K_CRI90_30W.IES

Maximum Candela = 1492.6

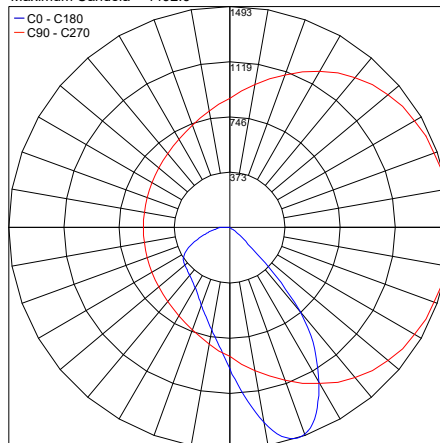

PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_A_3000K_CRI90_30W.IES

Maximum Candela = 1016.0

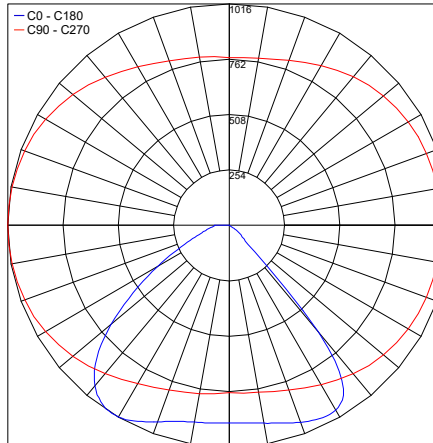

PHOTOMETRIC FILENAME : BERICA_OUT_2.2_Single_D_3000K_CRI90_30W.IES

Job Name/Date:

Fixture Type Designation: