

ELEMENT SLIM 4 / 4-B

LIGHT ATMOTION
LAMB32
IDEAS BECOMING LIGHT

MINIMUM
MAXIMUM
LIGHT DATA MATTER

designplan®

datasheet


Element Slim is a linear, wall-mounted luminaire with single or double emission versions. It is available in 4 different lengths, 3 color temperatures and an 89° or wall washer light beam. Element Slim 4 (mono) and 4-B (bi) is 35.4" in length, with 3 color temperatures, and 5 standard finishes.



TECHNICAL DATA

Wattage	15W - Element Slim 4 Mono 30W - Element Slim 4-B Bi
Power Supply	Integral 120VAC
Dimming	0-10V Dimming
Construction	Body: Anticorodal Aluminum (Anodized) Lens: Extra Clear, Screen-printed, Tempered Glass Cable Length: 1.64'
CCT	2700K, 3000K, 4000K
BUG Rating	B1-U1-G1 (3000K)
Delivered Lumens	1575 lm (3000K - Mono - Element Slim 4) 3150 lm (3000K - Bi - Element Slim 4-B)
Efficacy	105 lm/W (3000K)
Optics	2 Standard, See Below
Finishes	5 Standard, See Below
Fixture Dimensions	35.43" l x 3.94" w x 1.57" h
Color Consistency	<3-Step MacAdam
IP Rating	IP66
Impact Resistance	IK09

Fixture Dimensions

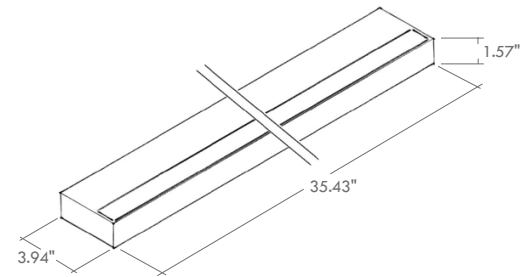

ORDERING INFORMATION

Example: LM02.104180.US.03.FL.BP. Power Supplies ordered separately.

Model No.	Finish	Optic	CCT
LM02.104180.US - Element Slim 4 (Mono)	01 - White	FL - 89° Beam	BC - 2700K
LM02.104181.US - Element Slim 4-B (Bi)	02 - Black	WW - Wall Washer	BP - 3000K
	03 - Gray		BF - 4000K
	04 - Cor-ten		
	11 - Anthracite		

NOTE: Mono Emission can be Up or Down
Bi Emission is Up and Down

Job Name/Date:


Fixture Type Designation:

ELEMENT SLIM 4 / 4-B

PHOTOMETRIC DATA


Note: All photometric data is 3000K

Maximum Candela = 624.8

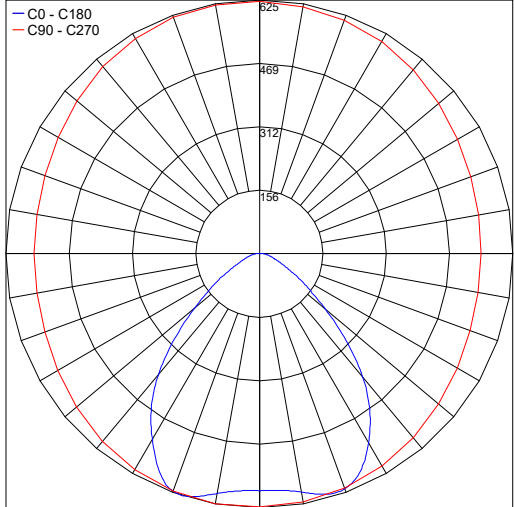

PHOTOMETRIC FILENAME : 02.104180.XX.FL.BP - LAMB32 - ELEMENT SLIM 4 - MONO EMISSION - 3000K.IES

Maximum Candela = 1401.6

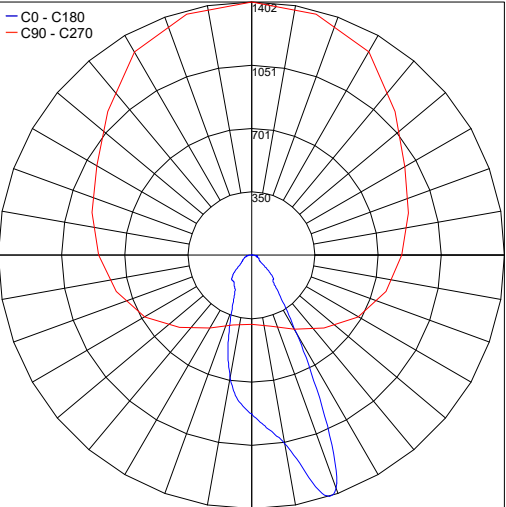

PHOTOMETRIC FILENAME : 02.104180.XX.WW.BP - LAMB32 - ELEMENT SLIM 4 - MONO EMISSION - 3000K.IES

Job Name/Date:

Fixture Type Designation: