

The Corso 2.0 is a strong, recessed outdoor uplight with an IP67 protection rating and a heat-dissipating body that provides excellent resistance to corrosion even in harsh (saline) environments. It is available in 2 color temperatures and 3 optical options - driveover rated up to 1100 lbs.


TECHNICAL DATA

Wattage / Input	8W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Thermally Conductive Technopolymer Trim: AISI 316L Stainless Steel Lens: Transparent Extra-Clear Glass
CCT	3000K, 4000K (2700K on request)
BUG Rating	B0-U3-G0 (3000K, 12°, 70°)
CRI	>80
Delivered Lumens	504 lm (3000K, 36°)
Efficacy	63 lm/W (3000K, 36°)
Optics	12°, 36°, 70°
Finishes	(4 Stage Marine Grade Finish)
Fixture Dimensions	Ø4.41" x 3.62" h
Cut-out Dimensions	Ø3.78"
Fixture Weight	1.54 lbs
LED Source	1 High Intensity Power LED
Lumen Maintenance	L90, B10 >50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP67, IP65
IK Rating	IK08
Driveover Rated	Up to 1102 lbs



Cut-out Dimensions: Ø3.78"

Fixture Dimensions

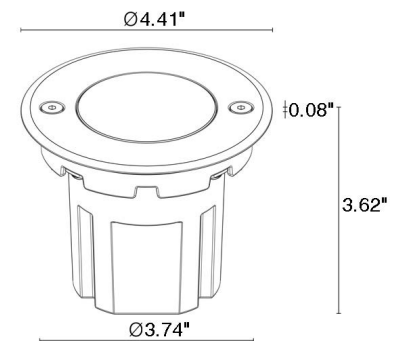

ORDERING INFORMATION

Example: CR2010000050SI. Accessories ordered separately.

CR2010			
Model No.	Optical Accessories	CCT	Optics
CR2010	0000 - None 0001 - Honeycomb	50 - 3000K 90 - 4000K	SI - 12° MI - 36° LI - 70°

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-10
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-10

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-9

DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-9

*For other power supply options consult factory.**Job Name/Date:**Fixture Type Designation:*

ACCESSORIES - Installation




WC0105
Outer Casing
For in-grade use

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 5574.3

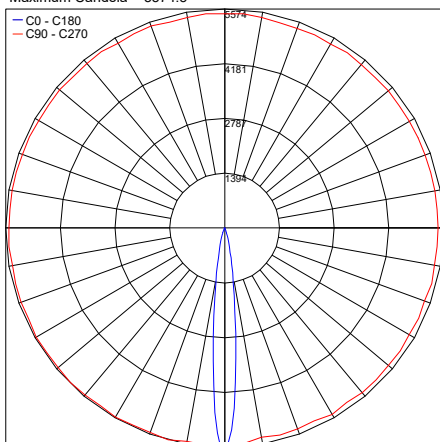


PHOTOMETRIC FILENAME : CORSO 2.0 S 12° [3000K 8W].IES

Maximum Candela = 1314.8

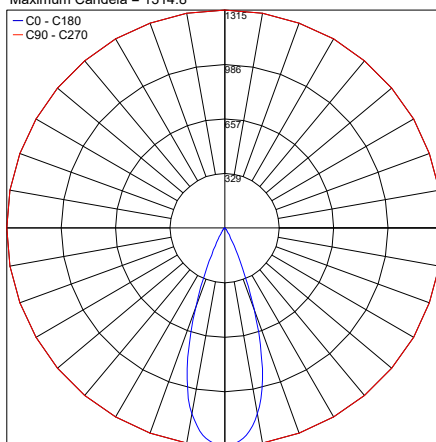

PHOTOMETRIC FILENAME : CORSO 2.0 M 36° [3000K 8W].IES

Maximum Candela = 315

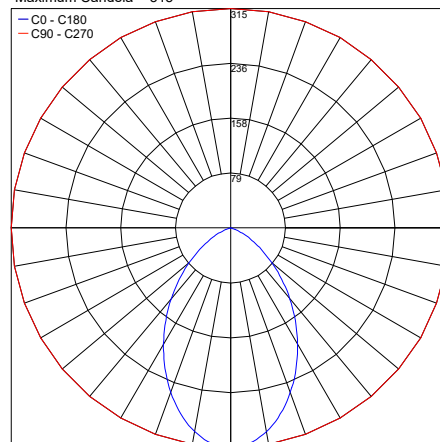

PHOTOMETRIC FILENAME : CORSO 2.0 L 70° [3000K 8W].IES

Job Name/Date:

Fixture Type Designation: