


The Centaur C1.H is a 1.5" diameter in-grade uplight made of stainless steel that has a hood, and is suitable for power washing and is driveover rated up to 11,000 lbs. It is available in RGBW or RGBA (A for Amber). Field addressable.

TECHNICAL DATA

Wattage / Input	4W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body and Trim: Stainless Steel 316 Alloy Lens: 0.4" Clear Tempered Glass Lens Frame: Threaded Bottlecap
CCT	RGBW or RGBA (Amber in 2000K)
CRI	>80
BUG Rating	B0-U3-G0 - All Channels B0-U2-G0 - Red B0-U2-G0 - Green B0-U1-G0 - Blue B0-U2-G0 - White
Delivered Lumens	RGBW: 62 lm R: 12 lm, G: 30 lm, B: 9 lm, W: 22 lm
Efficacy	31 lm/W
Optics	30° standard
Finishes	Stainless Steel 316 Alloy
Fixture Dimensions	Ø1.5" x 4.3" h
LED Source	RGBW or RGBA LED
IP Rating	IP68, IP69K
Driveover Rated	11,000 lbs



Fixture Dimensions

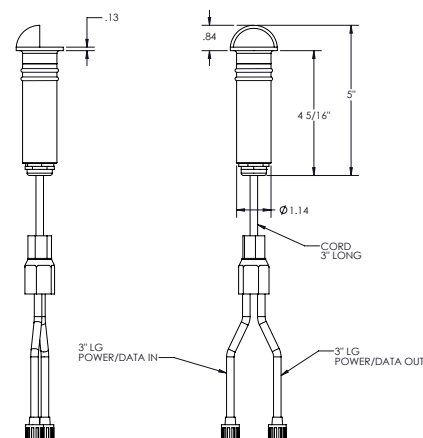

ORDERING INFORMATION

Example: C1.H-L-1-4-SS-1-X-T-00. Power Supplies / Accessories ordered separately.

C1.H-L	-		-	4	-	SS	-		-	X	-	T	-	00
Model #	CCT / Wattage	Body	Finish	Optics	Driver	Lens	Options							
C1.H-L	1 - 4W, RGBW 2 - 4W, RGBA NOTE: A stands for Amber (2000K)	4 - Recessed box with conduit entries	SS - Stainless Steel	0 - None 1 - 30°	X - Remote See p.2 to specify RDM DMX Decoder integrate into fixture housing. Fixture required an RDM controller to address and control RGBW colors (provided by others)	T - Clear Tempered	00 - None							

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-20

For other power supply options consult factory.


ACCESSORIES

Installation



PPMP03318

Core Drilled Application Sleeve

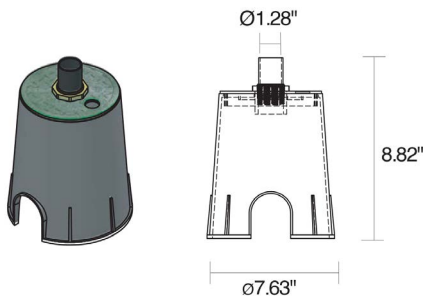


C1.0, C1.S - OH

Poured Concrete Housing

ACCESSORIES

Controllers (RGBW)

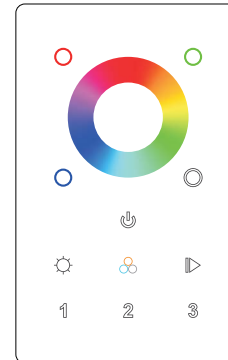

[PPWD00570](#) - RGBW DMX512+Wifi Controller

Touch Sensitive

Can be controlled by WiFi

Controls 3 zones synchronously and separately

Job Name/Date:

Fixture Type Designation: