

Volk is an IP66-rated bollard with a slanted head with 3 LEDs and a height of 19.7" that is perfect for illuminating any outdoor space with high quality light. It is made of stainless steel, and is available in 4 color temperatures, with a 65° optic, and 3 Hard Coat Treatment finishes. Dark Sky compliant.

TECHNICAL DATA

Wattage	15W
Power Supply	Integral 120VAC
Dimming	On/Off Only
Construction	Body: AISI 316L Stainless Steel Lens: 0.16" Silk-screened, Extra-clear Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	1650 lm (3000K) Dark Sky compliant
Efficacy	110 lm/W (3000K)
Optics	65°
BUG Rating	B1-U1-G0
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	6.3" x 20.5" h
IP Rating	IP66
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.



Fixture Dimensions



ORDERING INFORMATION

Example: SPT6033605G.US. Accessories sold separately.

SPT603		6	05		.US
Model No.	CCT	Optics	Height	Finishes	
SPT603	1 - 2200K 2 - 2700K 3 - 3000K 4 - 4000K	6 - 65°	05 - 20" (50 cm)	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:

FINISHES



Inox Natural




Inox Graphite





Inox Bronze


ACCESSORIES



PT65000
Flange Kit with
4 Anchor Bolts
9.06" w x 10.63" h
(REQUIRED)




PT65010
Anchor Flange
8.27" w x 3.15" h
(REQUIRED)




PHOTOMETRIC DATA

Maximum Candela = 1142.6

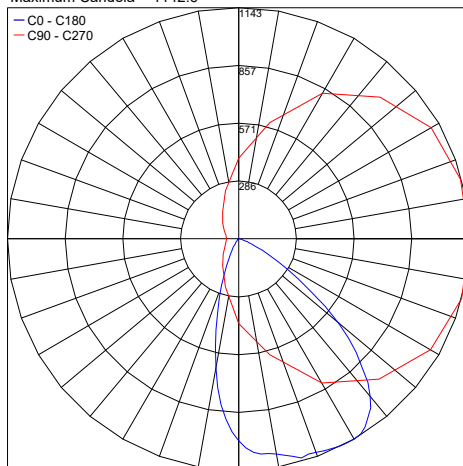


PHOTOMETRIC FILENAME : VOLK 15W 2700K 19.7IN - PT6032605N.IES

Maximum Candela = 1165.0

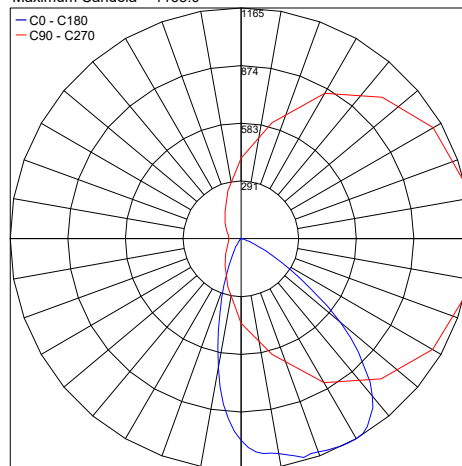

PHOTOMETRIC FILENAME : VOLK 15W 3000K 19.7IN - PT6033605N.IES

Maximum Candela = 1288.2

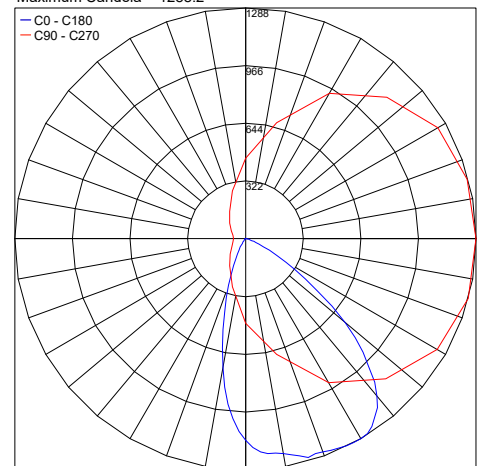

PHOTOMETRIC FILENAME : VOLK 15W 4000K 19.7IN - PT6034605N.IES

Job Name/Date:

Fixture Type Designation: