

FIXED B-01

FIXED is a stainless steel, IP66-rated, wall mounted LED luminaire with clean lines and a compact design that is suitable for outdoor installation. It is available in mono or bi light emission, with one, two or three LEDs, and 3 standard Hard Coat Treatment finishes. FIXED B-01 is the 2 x 5W (1 Up / 1 Down LED) mono, bi light version.

TECHNICAL DATA

Wattage	2 X 5W
Power Supply	Remote 350mA - see page 2
Construction	Body: AISI 316L Stainless Steel Lens: Black Silk-screened Extra-clear Tempered Glass 0.16" Thick
CCT	2200K, 2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	550 lm per beam (3000K)
Efficacy	110 lm/W per beam (3000K)
Optics	21°, 45°, 65°
BUG Rating	B1-U3-G0 (3000K)
Lumen Maintenance	100,000 hrs L80, B10 (Ta 25°C)
Hard Coat Finishes	Inox Natural, Inox Graphite, Inox Bronze
Fixture Dimensions	4.7" h x 2.4" w x 4.7"
IP Rating	IP66
Impact Resistance	IK08
Warranty	10 Years Against Corrosion 5 Years on Electrical Components

Hard Coating Treatment is the surface treatment of all the products by Stral Lighting. It is not a skin of color, but instead is a process that allows for the color to be absorbed all the way through. If a product is scratched, the color beneath is the same as the color on the surface. It guarantees a high superficial resistance to corrosion and atmospheric agents, as well as making the products anti-fingerprint and anti-stain. Available in three finishes Inox Natural, Inox Graphite and Inox Bronze.


ORDERING INFORMATION

Example: SPT4024034G.US. Power Supplies / Accessories sold separately.

SPT40240				.US
Model No.	CCT	Optics	Finishes	
SPT40240 (B01)	1 - 2200K 2 - 2700K 3 - 3000K 4 - 4000K	2 - 21° 4 - 45° 6 - 65°	N - Inox Natural G - Inox Graphite B - Inox Bronze	.US

Job Name/Date:

Fixture Type Designation:



Fixture Dimensions



FINISHES



Inox Natural



Inox Graphite



Inox Bronze

SUGGESTED POWER SUPPLIES

350mA - Bi Emission


Part Number	Description	Input/Output	# of Fixtures - B01
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	3-3
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-4
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-5

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometric data is 3000K


Maximum Candela = 1983.2

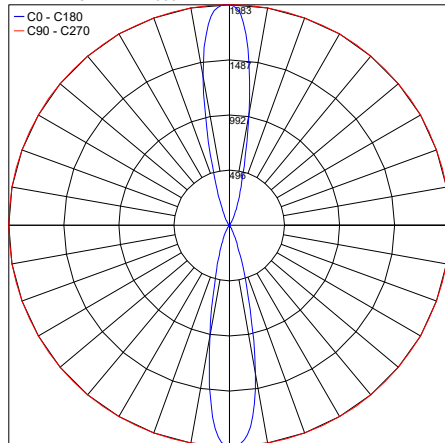

PHOTOMETRIC FILENAME : DYKE B01 30K 21° PT4024032B.IES

21°


Maximum Candela = 669.5

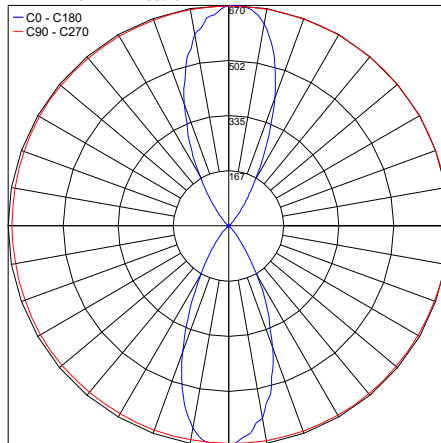

PHOTOMETRIC FILENAME : DYKE B01 30K 45° PT4024034B.IES

45°

Maximum Candela = 387.3

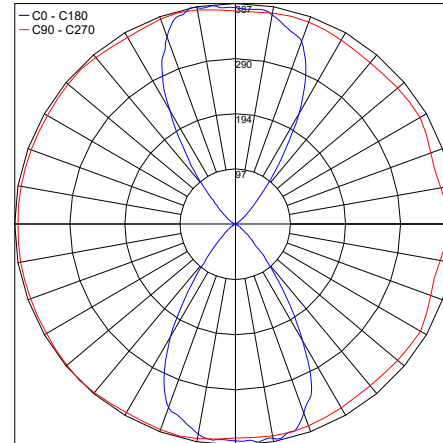

PHOTOMETRIC FILENAME : DYKE B01 30K 65° PT4024036B.IES

65°

Job Name/Date:

Fixture Type Designation: