

CAR-GO 1 is an extremely durable, IP67-rated, outdoor, linear in-grade fixture designed for floors and/or driveways. It is available in 4 different lengths with diffuse optics and driveover rated up to 4,400 lbs.

TECHNICAL DATA

Wattage	2.5W, 12W, 24W, 34W
Power Supply	Remote 24VDC, not included. See Page 3
Construction	Body: Extruded Aluminum EN AW6026 Lens: Opal Glass Diffuser
CCT	2700K, 3000K
CRI	>90
Delivered Lumens	115 lm (CAR-GO 1 130) 510 lm (CAR-GO 1 300) 1020 lm (CAR-GO 1 600) 1300 lm (CAR-GO 1 900)
Efficacy	46 lm/W (CAR-GO 1 130) 43 lm/W (CAR-GO 1 300) 43 lm/W (CAR-GO 1 600) 38 lm/W (CAR-GO 1 900)
Optics	Diffuse
Finishes	Glass
Fixture Dimensions	5.3" l x 3.7" x 4.3" (CAR-GO 1 130) 13.0" x 3.7" x 4.3" (CAR-GO 1 300) 24.1" x 3.7" x 4.3" (CAR-GO 1 600) 35.2" x 3.7" x 4.3" (CAR-GO 1 900)
Lumen Maintenance	L80, B15 >60,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP67
Impact Resistance	IK10
Driverover Rating	Up to 4409 lbs

REQUIRED HOUSING BOX
Ordered Separately - See page 2



Fixture Dimensions - see page 2

ORDERING INFORMATION


Example: LNCGL6IPTDHB7ZU.US. Power Supplies / REQUIRED Accessories ordered separately.

LNCG		D		B7Z	U	US
Model #	Size	Optics	CCT	Power	Finish	
LNCG	L1 IPT - CAR-GO 1 130 (2.5W) L3 IPT - CAR-GO 1 300 (12W) L6 IPT - CAR-GO 1 600 (24W) L9 IPT - CAR-GO 1 900 (34W)	D - Diffuse	Y - 2700K H - 3000K	B7Z - Remote Driver	U - Glass	US


Job Name/Date:

Fixture Type Designation:


FIXTURE DIMENSIONS




Car-Go 1 130





Car-Go 1 300



Car-Go 1 600



Car-Go 1 900



ACCESSORIES - (included)

0.5 m (1.64') length cable - 05RN-F - Included

Single connection IP68 - Included

ACCESSORIES - Required

00CCL1.STD - for Car-Go 1 130

00CGL30.STD - for Car-Go 1 300

00CGL60.STD - for Car-Go 1 600

00CGL90.STD - for Car-Go 1 900

Housing Box - REQUIRED

0404M019

Three-way connection box mini

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures			
			2.5W	12W	24W	36W
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-32	1-6	1-3	1-2
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	4-32	1-6	1-3	1-2

Suggested Lutron Compatible - 2.5W (Car-Go 1 130)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-30

Suggested Lutron Compatible - 12W (Car-Go 1 300)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-6

Suggested Lutron Compatible - 24W (Car-Go 1 600)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-3

Suggested Lutron Compatible - 34W (Car-Go 1 900)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-2

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures			
			2.5W	12W	24W	34W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-30	1-6	1-3	1-2

*For other power supply options consult factory.**Job Name/Date:**Fixture Type Designation:*


PHOTOMETRIC DATA

Note: All photometric data is 3000K

CAR-GO 1 130

Maximum Candela = 35.5

— C0 - C180
— C90 - C270

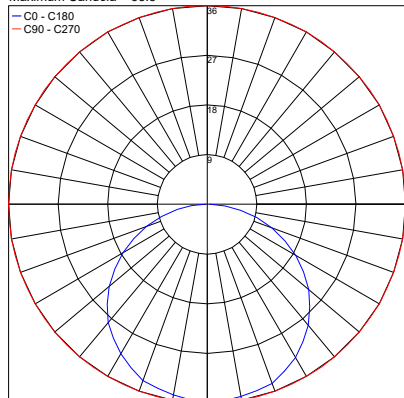


PHOTOMETRIC FILENAME : CAR-GO 1 130 - CGL1IPTDHB7ZU.IES

CAR-GO 1 300

Maximum Candela = 35.5

— C0 - C180
— C90 - C270

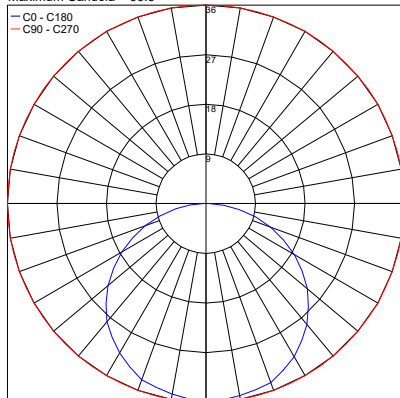


PHOTOMETRIC FILENAME : CAR-GO 1 300 - CGL1IPTDHB7ZU.IES

CAR-GO 1 600

Maximum Candela = 338.3

— C0 - C180
— C90 - C270

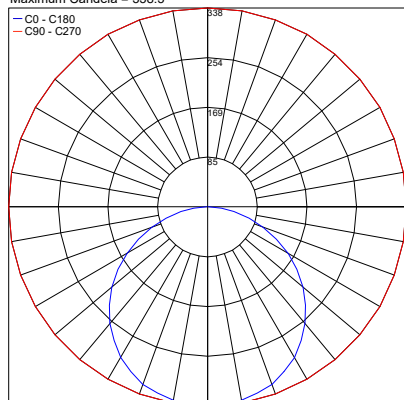


PHOTOMETRIC FILENAME : CAR-GO 1 600 - CGL1IPTDHB7ZU.IES

CAR-GO 1 900

Maximum Candela = 430.9

— C0 - C180
— C90 - C270

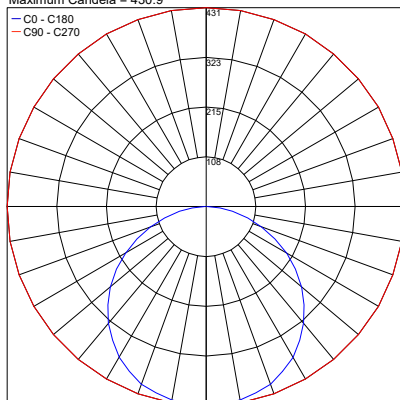

PHOTOMETRIC FILENAME : CAR-GO 1 900 - CGL1IPTDHB7ZU.IES

Job Name/Date:

Fixture Type Designation: