

# PIN 2400

Pin is a slender, IP65-rated bollard or pole-mounted luminaire made of aluminum and stainless steel suitable for outdoor installation. It is highly durable, resistant to the elements and protected by a "hermit crab system" which allows cables to be stored inside the technical compartment and protected by a gel compound that makes the wiring waterproof and error proof. Pin 2400 is the 95" version. Dark Sky compliant.




SINGLE



DOUBLE

Fixture Dimensions

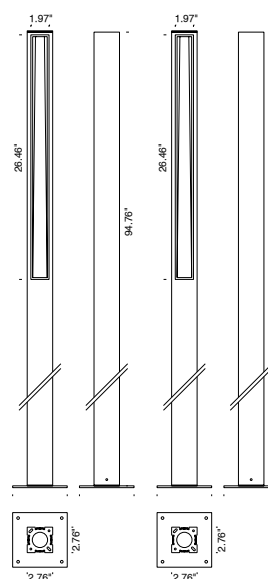

## TECHNICAL DATA

|                    |                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------|
| Wattage            | 14W                                                                                          |
| Power Supply       | Integral 120VAC                                                                              |
| Dimming            | 0-10V Dimming                                                                                |
| Construction       | Body: 6026 Anticorodal Aluminum<br>Base: Stainless Steel<br>Lens: Extra Clear Tempered Glass |
| CCT                | 2700K, 3000K, 4000K                                                                          |
| BUG Rating         | B0-U0-G1 (Mono)<br>B1-U2-G1 (Double)                                                         |
| CRI                | >80                                                                                          |
| Delivered Lumens   | 1142 lm (3000K)<br>Dark Sky compliant                                                        |
| Efficacy           | 81.6 lm/W                                                                                    |
| Optics             | Single or Double Emission                                                                    |
| Finishes           | Anthracite, Alu Gray (RAL 9006), Dark Brown                                                  |
| Lumen Maintenance  | 55,000 hrs (Ta 35°C)                                                                         |
| Fixture Dimensions | 94.76" h x 2.76" x 2.76"                                                                     |
| Aperature          | 26.46" h x 1.97"                                                                             |
| IP Rating          | IP65                                                                                         |
| Impact Resistance  | IK07                                                                                         |

## ORDERING INFORMATION


Example: F61042.8.3.64.US. Power Supplies ordered separately.

|                 |                         |           |             |     |
|-----------------|-------------------------|-----------|-------------|-----|
|                 |                         |           |             | .US |
| Model No.       | Finish                  | CCT       | Emmission   |     |
| F61042 - Mono   | 1 - Anthracite          | 2 - 2700K | 64 - Mono   | .US |
| F61043 - Double | 4 - Alu Gray (RAL 9006) | 3 - 3000K | 67 - Double |     |
|                 | 8 - Dark Brown          | 4 - 4000K |             |     |



Job Name/Date:

Fixture Type Designation:

## ACCESSORIES



**A9941**  
Anchorage Base




**A0121**  
Ground Mount Spacer

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 1035.7


— C0 - C180  
— C90 - C270

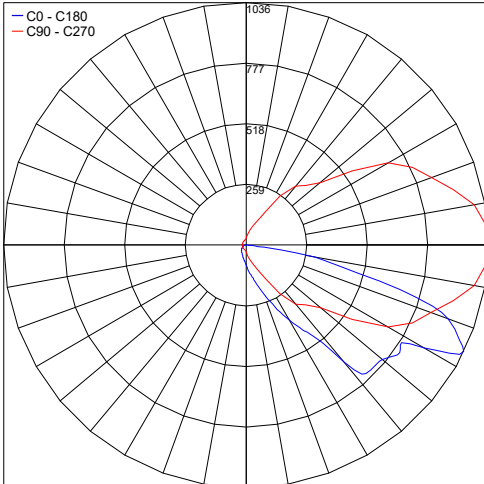

PHOTOMETRIC FILENAME : PIN 2400 MONO 30K - 61042.X.3.64.IES

Maximum Candela = 531.3

— C0 - C180  
— C90 - C270

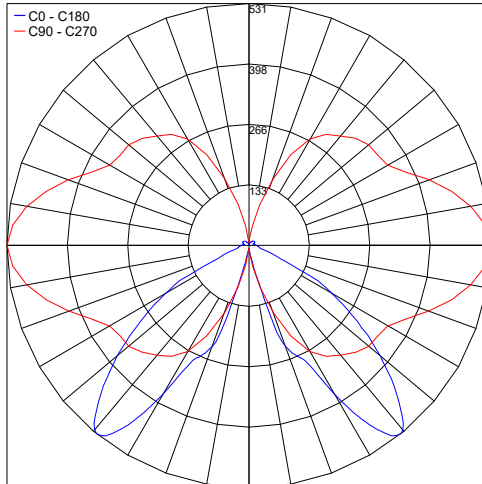

PHOTOMETRIC FILENAME : PIN 2400 DOUBLE 30K - 61043.X.3.67.IES

Job Name/Date:

Fixture Type Designation: