

PIN

WHEN DESCRIBING A PRODUCT LIKE PIN, IT WOULD BE EASY TO FOCUS ON ITS SLENDER BUT RESISTANT STRUCTURE AND ITS MINIMALISTIC LOOK. BUT FRANCESCONI HAS MANY OTHER TRICKS UP ITS SLEEVE. THE FIRST CONCERNING THE EASE OF CONNECTION. AN INGENUOUS GEL SYSTEM ALLOWS FOR SAFE AND ISOLATED WIRING, WITHOUT RESORTING TO PRE-WIRED SOLUTIONS THAT HAVE VERY LITTLE PRACTICAL CONVENIENCE OR RELIABILITY. AND WE CARE A LOT ABOUT RELIABILITY.

FEATURES:

- 6026 ANTICORODAL ALUMINUM HOUSING.
- HIGH-RESISTANCE DOUBLE PAINTING PROCESS (UNI ISO9227:2012 SALINE TEST COMPLIANT).
- STAINLESS STEEL FIXING BASE
- A4 STAINLESS STEEL SEALING ALLEN SCREWS.
- EXTRA CLEAR TEMPERED GLASS LENS.
- SINGLE-CABLE INPUT, PRE-ASSEMBLED WITH NEOPRENE CABLE AND IP68 WATER-STOP FAST CONNECTOR.
- SILICON GASKET.
- COMPLIANT EN60598-1 AND RELATED ANNEX



79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



UNRESTRICTED CONNECTIONS

LET'S FACE IT: THE VAST MAJORITY OF PIN-LIKE PRODUCTS MAKE INSTALLATION TASKS HELL. PRE-WIRED PRODUCTS WITH VERY LONG CABLES, AND CONNECTIONS TO AWKWARD REMOTE BOXES CAN TAKE A LOT OF THOUGHT AND TIME TO SET-UP. AT FRANCESCONI WE HAVE DESIGNED PIN WITH THE "HERMIT CRAB SYSTEM" WHICH ALLOWS CABLES TO BE STORED INSIDE THE TECHNICAL COMPARTMENT AND PROTECTED BY A GEL COMPOUND THAT MAKES THE WIRING WATERPROOF AND ERROR PROOF.

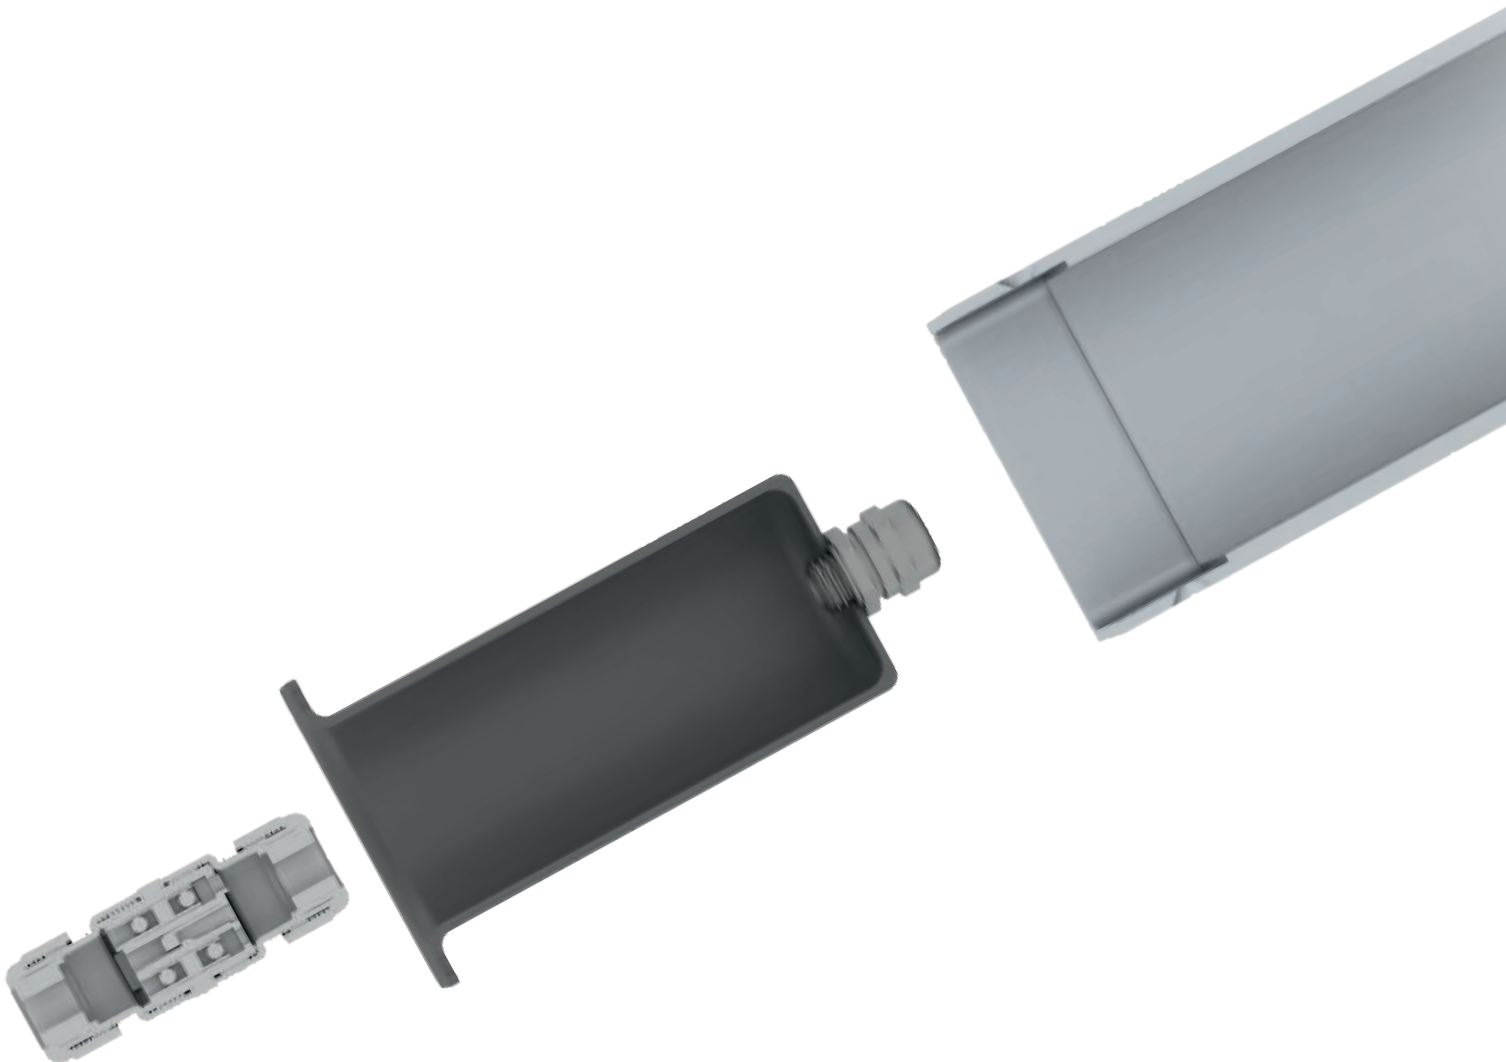

A NEW PIN LIGHT

THE ENTIRE PIN COLLECTION HAS BEEN REDESIGNED, WITH HIGH PERFORMANCE LEDS, PROTECTED BY A DISSIPATION SYSTEM THAT MAKES THE PRODUCT DURABLE AND MAINTAINS ITS EXCELLENT PERFORMANCE



A MATTER OF REFLECTION

THE ENTIRE PIN COLLECTION PRODUCES A LARGE AMOUNT OF LIGHT USING A PERISCOPE REFLECTION SYSTEM, EMPHASIZED BY THE USE OF HIGHLY EFFICIENT ALUMINUM REFLECTORS, CAPABLE OF PROJECTING LIGHT WHERE IT'S NEEDED WITH VIRTUALLY NO DROP IN INTENSITY.







PRIVATE VILLA - ITALY (LIGHTING CONCEPT E. ROCCO GIARDINI SRL)

PIN BOLLARD SINGLE EMISSION


PERFORMANCE DATA

TRUE POWER (W)	8.0	14.0	14.0
TRUE LUMENS (3000K)	450 (.64)	899 (.64)	899 (.64)
TRUE LUMENS (4000K)	469 (.64)	937 (.64)	937 (.64)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	55.000 (Ta 35°C)

BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	120VAC 50/60Hz	120VAC 50/60Hz	120VAC 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF / 0-10V	INCLUDED ON-OFF / 0-10V
OVERVOLTAGE PROTECTION	10KV	10KV	10KV
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3 POLES NEOPRENE IP68	3-POLES NEOPRENE	3-POLES NEOPRENE
	FAST CONNECTION IP65	IP68 FAST CONNECTION	IP68 FAST CONNECTION
PROTECTION RATING	- IK07	IP65 - IK07	IP65 - IK07

DIMENSIONS

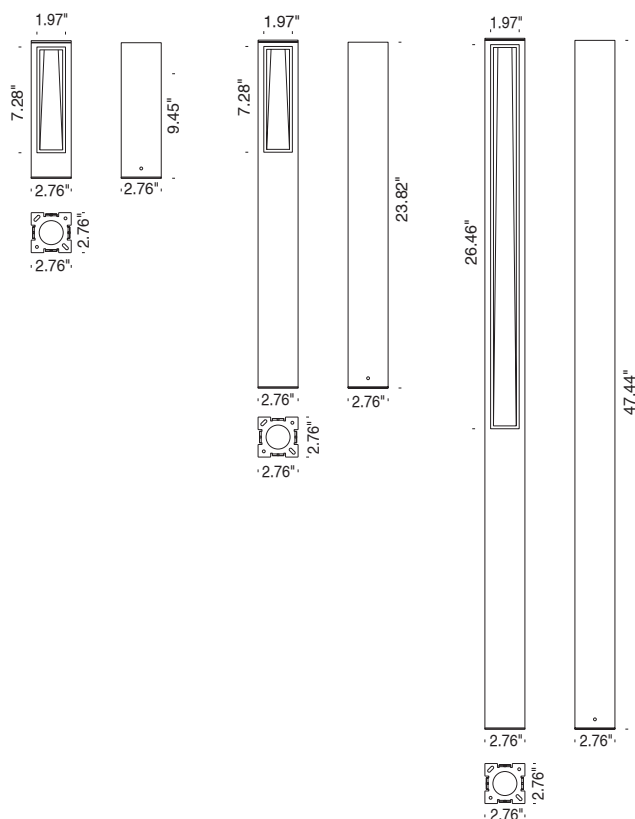

CODE COMPOSITION

● FINISH

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

■ LED COLOR

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

▲ BEAM

.64 - MONO EMISSION

61025

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

.64 - MONO EMISSION


61037

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN


.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

.64 - MONO EMISSION

ACCESSORIES



COACH PLATE
A9939



GROUND MOUNT SPACER
A0121

PIN BOLLARD DOUBLE EMISSION


PERFORMANCE DATA

TRUE POWER (W)	8.0	14.0	14.0
TRUE LUMENS (3000K)	572 (.67)	1142 (.67)	1142 (.67)
TRUE LUMENS (4000K)	595 (.67)	1190 (.67)	1190 (.67)
L90 LIFETIME (HRS)	55.000 (Ta 35°C)	55.000 (Ta 35°C)	55.000 (Ta 35°C)

BUILD DATA

CLASS	I	I	I
NOMINAL VOLTAGE	120 VAC 50/60Hz	120 VAC 50/60Hz	120 VAC 50/60Hz INCLUDED
POWER SUPPLY	INCLUDED ON-OFF	INCLUDED ON-OFF / 0-10V	ON-OFF / 0-10V
OVERVOLTAGE PROTECTION	10KV	10KV	10KV
EXTERNAL CABLE	SINGLE INPUT	SINGLE INPUT	SINGLE INPUT
	3-POLES NEOPRENE	3-POLES NEOPRENE	3-POLES NEOPRENE
	IP68 FAST CONNECTION	IP68 FAST CONNECTION	IP68 FAST CONNECTION
PROTECTION RATING	IP65 - IK07	IP65 - IK07	IP65 - IK07

DIMENSIONS

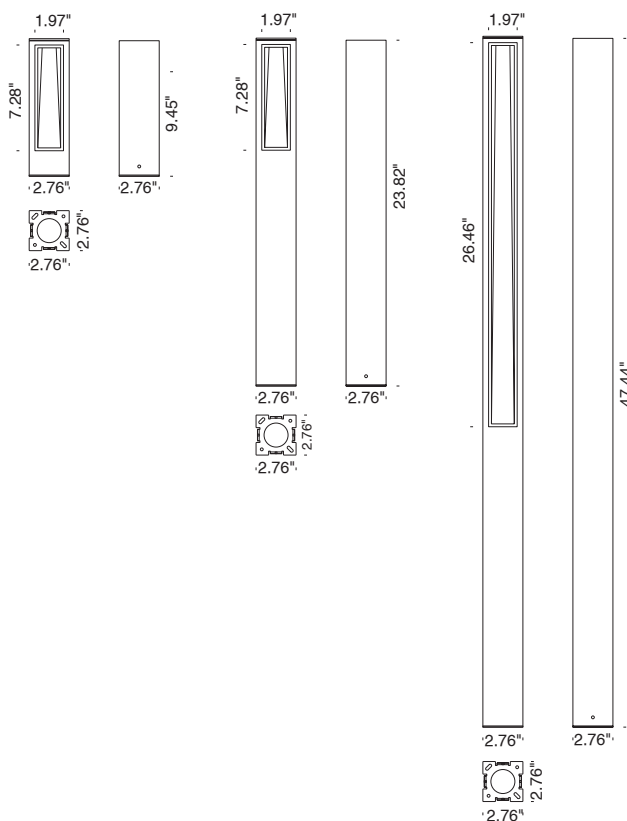

CODE COMPOSITION

● FINISH

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

■ LED COLOR

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

▲ BEAM

.67 - DOUBLE EMISSION

61026

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

.67 - DOUBLE EMISSION


61038

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN


.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

.67 - DOUBLE EMISSION

ACCESSORIES



COACH PLATE
A9939



GROUND MOUNT SPACER
A0121

PIN POLE SINGLE & DOUBLE EMISSION

PIN2400 SINGLE

PIN2400 DOUBLE


PERFORMANCE DATA

TRUE POWER (W)	14.0	14.0
TRUE LUMENS (3000K)	899 (.64)	1142 (.67)
TRUE LUMENS (4000K)	937 (.64)	1190 (.67)
L90 LIFETIME (HRS)	55,000 (Ta 35°C)	55,000 (Ta 35°C)

BUILD DATA

CLASS	I	I
NOMINAL VOLTAGE	120 VAC 50/60Hz	120 VAC 50/60Hz
POWER SUPPLY	INCLUDED ON-OFF / 0-10V	INCLUDED ON-OFF / 0-10V
OVERVOLTAGE PROTECTION	10KV	10KV
EXTERNAL CABLE	SINGLE INPUT 3-POLES NEOPRENE IP68 FAST CONNECTION	SINGLE INPUT 3-POLES NEOPRENE IP68 FAST CONNECTION IP65
PROTECTION RATING	IP65 - IK07	- IK07
EMISSION	SINGLE EMISSION	DOUBLE EMISSION

DIMENSIONS

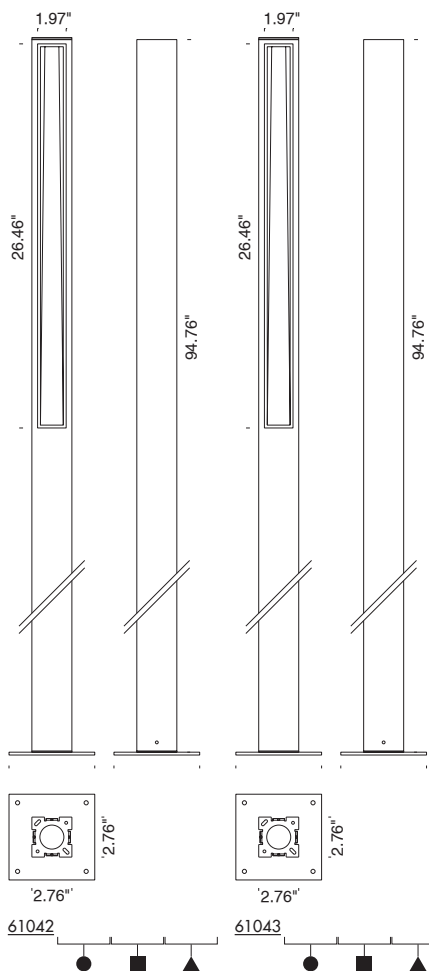

CODE COMPOSITION

- FINISH

- LED COLOR

- ▲ BEAM

.1 - ANTHRACITE
.4 - ALU GREY (RAL9006)
.8 - DARK BROWN

.2 - 2700°K - CRI > 80
.3 - 3000°K - CRI > 80
.4 - 4000°K - CRI > 80

.64 - MONO EMISSION

- .1 - ANTHRACITE
- .4 - ALU GREY (RAL9006)
- .8 - DARK BROWN



- .2 - 2700°K - CRI > 80
- .3 - 3000°K - CRI > 80
- .4 - 4000°K - CRI > 80

- .67 - DOUBLE EMISSION

SINGLE EMISSION

DOUBLE EMISSION

ACCESSORIES



COACH PLATE
A9941



GROUND MOUNT SPACER
A0121

