


Trevi are a series of linear profiles suitable for outdoor and underwater applications featuring a cylindrical screen, a distinctive characteristic that enables the profile to ‘disappear’ in the water, leaving just its light to capture the eye. Trevi 2.1 is 47.8” in length and offers static white light with elliptical or diffused optics.

TECHNICAL DATA


|                    |                                                                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Wattage / Input    | 42W (24VDC)                                                                                                                                 |
| Power Supply       | Remote, not included. See page 2.                                                                                                           |
| Construction       | End Caps: AISI 316L Stainless Steel<br>Heat Sink: Internal Anticorodal Aluminum<br>Lens: Transparent Polycarbonate<br>Cable Length: 16.4 ft |
| CCT                | 2200K, 2700K, 3000K, 4000K                                                                                                                  |
| CRI                | 80                                                                                                                                          |
| BUG Rating         | B2-U1-G1 (38°x94°)<br>B2-U2-G1 (Diffuse)                                                                                                    |
| Delivered Lumens   | 4484 lm (3000K, 38°x94°)                                                                                                                    |
| Efficacy           | 106.8 lm/W (3000K, 38°x94°)                                                                                                                 |
| Optics             | 38°x94°, Diffuse                                                                                                                            |
| Finish             | Polycarbonate                                                                                                                               |
| Fixture Dimensions | Ø1.97" x 47.76" l                                                                                                                           |
| Fixture Weight     | 8.82 lbs                                                                                                                                    |
| LED Source         | 112 mid-power LEDs                                                                                                                          |
| Lumen Maintenance  | 60,000h L80 B10 (Ta 25°C)                                                                                                                   |
| Color Consistency  | 3-Step MacAdam                                                                                                                              |
| Operating Temp.    | -4°F - 113°F (installation outdoors)<br>32°F - 113°F (installation underwater)                                                              |
| IP Rating          | IP65, IP68                                                                                                                                  |
| Impact Rating      | IK10                                                                                                                                        |
| Max Depth          | 32.81 ft                                                                                                                                    |



UL 676

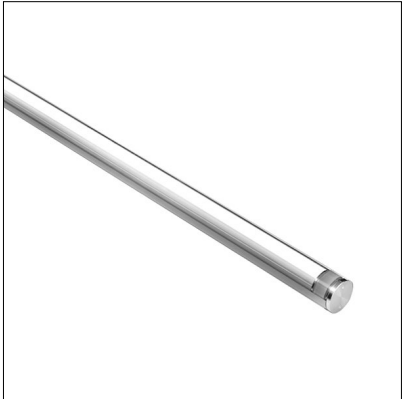

Fixture Dimensions

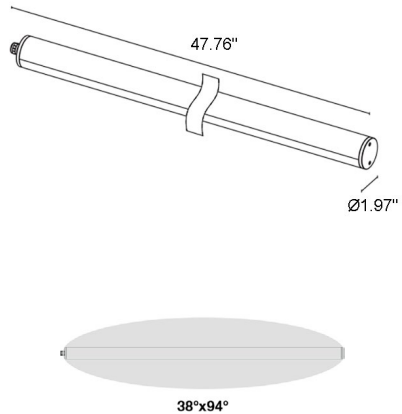

ORDERING INFORMATION

Example: TR21000000N0WP. Accessories / Power Supplies ordered separately.

|            |                                                      |                            |                   |
|------------|------------------------------------------------------|----------------------------|-------------------|
| TR21000000 |                                                      |                            | P                 |
| Model No.  | CCT                                                  | Optics                     | Finish            |
| TR21000000 | N0 - 2200K<br>F0 - 2700K<br>50 - 3000K<br>90 - 4000K | W - 38°x49°<br>D - Diffuse | P - Polycarbonate |

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

STATIC WHITE - 24VDC (FOR USE WITH FOUNTAIN / WATER FEATURES)


| Part Number                   | Description                             | Input/Output                                      | # of Fixtures |
|-------------------------------|-----------------------------------------|---------------------------------------------------|---------------|
| <a href="#">FPV-100110024</a> | ELV / TRIAC & 0-10V Dimming (100 to 0%) | 120-277VAC to 24VDC, 96W, Class 2, IP66, NEMA 4X  | 1-1           |
| <a href="#">FPV-100000024</a> | Non-Dim                                 | 120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X | 1-1           |

For other power supply options consult factory.

ACCESSORIES - Installation (REQUIRED)

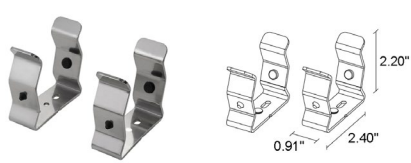

WMA04  
Clips Pair

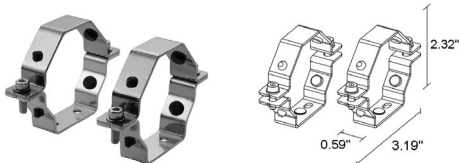

WMA05  
Pair of tamper-resistant clips




WMA07  
Suspension Kit


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA  
Note all Photometry is 3000K

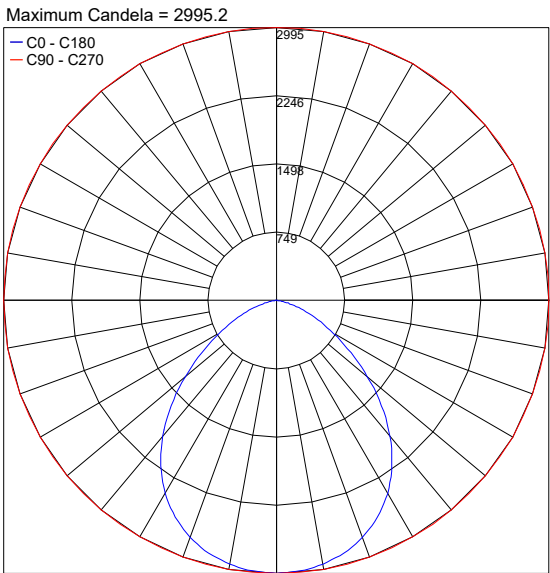

PHOTOMETRIC FILENAME : TREVI\_2.1\_W\_38X94\_3000K\_42W\_24VDC.IES

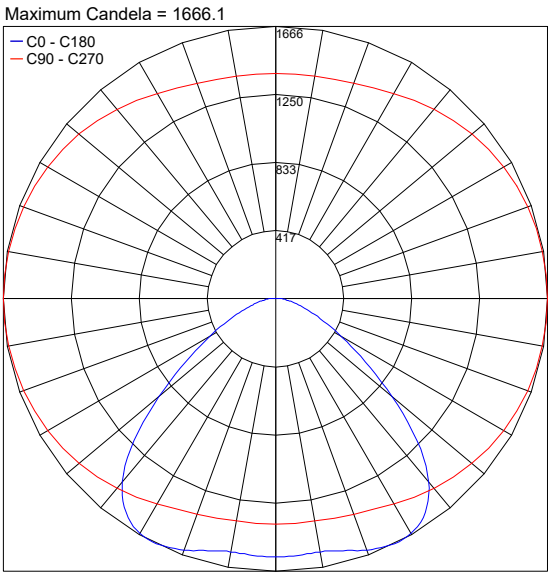

PHOTOMETRIC FILENAME : TREVI\_2.1\_D\_3000K\_42W\_24VDC.IES

Job Name/Date:

Fixture Type Designation: