


Krill is a small, adjustable zoom, surface mounted floodlight with a pared-down design for indoor applications. The fixture is ideal for inside shop windows and display cabinets in retail and museum environments. Krill can be installed in a variety of ways to easily reach details that need emphasizing with a double-jointed arm that can be adjusted by up to 180°. Krill 4.4 is 1.8" in diameter with 9W power and an optical range of 17°—39° adjustable with a magnet.



Fixture Dimensions

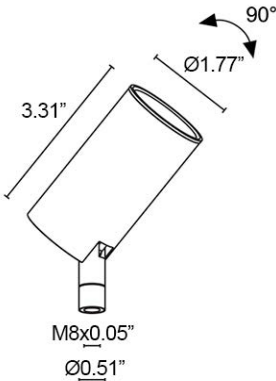

Required installation accessories, not included. See page 3.

TECHNICAL DATA

Wattage / Input	9W (250mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anticorodal Aluminum Joint: Brass Cable Length: 4.92'
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	649 lm (3000K, 17°)
Efficacy	72.1 lm/W (3000K, 17°)
Optics	Range 17°—39° (manual zoom)
Finishes	4 Standard, Custom RAL on request (see below)
Fixture Dimensions	Ø1.77" x 3.31" h
Base Size	Ø0.51"
Fixture Weight	0.66 lbs
LED Source	1 COB LED
Lumen Maintenance	L90, B10 >60,000hrs (Ta 25°C)
Color Consistency	2-step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP40

ORDERING INFORMATION

Example: KI442010005R3Y. Power Supplies / Required Accessories ordered separately.

KI44201000		R3	
Model No.	CCT	Optics	Finish
KI44201000	F - 2700K 5 - 3000K 9 - 4000K	R3 - 17°—39°	E - White N - Black Y - Rose Gold Z - Antique Bronze C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

250mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2, DAMP	1-1
PPLT00290	Leading/Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2, DAMP	1-1
PPLT00480-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 30W, Class 2, DAMP	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 50W, Class 2, DAMP	1-1
PPLT00538-P	0-10V Dimming to 0.1% (4 channels)	120-277VAC to 250mA, 100W, Class 2	1-4

For other power supply options consult factory.


ACCESSORIES - Installation (REQUIRED, NOT INCLUDED)

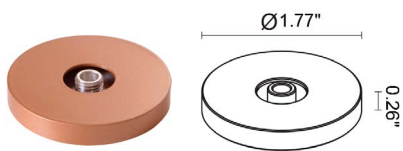


WDA06B - White
WDA06N - Black
WDA06Y - Rose Gold
WDA06Z - Antique Bronze
 Fixing Base

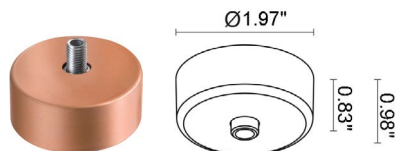


WDA10B - White
WDA10N - Black
WDA10Y - Rose Gold
WDA10Z - Antique Bronze
 Ceiling Rose

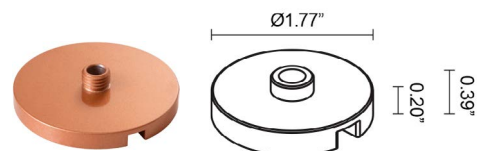

WDA07B - White
WDA07N - Black
WDA07Y - Rose Gold
WDA07Z - Antique Bronze
 Magnetic Plate

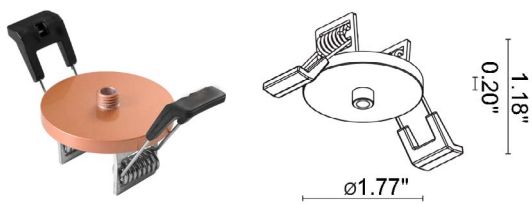

WGA09B - White
WGA09N - Black
WGA09Y - Rose Gold
WGA09Z - Antique Bronze
 Retaining Spring Clip Ø1.77"




WGA01
 Coupler

MORE ACCESSORIES on Page 3


Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Spikes and Arms

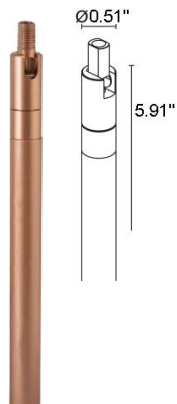

WDA08B* - White
WDA08N* - Black
WDA08Y* - Rose Gold
WDA08Z* - Antique Bronze
 Rigid arm - 5.91" height
**order together with the part WDA06_ or with the part WGA01*

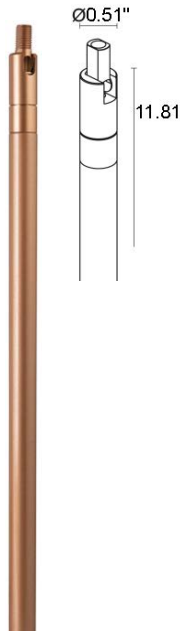

WDA09B* - White
WDA09N* - Black
WDA09Y* - Rose Gold
WDA09Z* - Antique Bronze
 Rigid arm - 11.81" height
**order together with the part WDA06_ or with the part WGA01*

ACCESSORIES - Spare Parts



WE0201
 Magnet for adjustable optics and zoom lens

Cables


WF0110
 PVC Cable FROR 2x0.35 3.5mm (0.14")
Your choice of length

PHOTOMETRIC DATA

Note all Photometry is 3000K

17°


Maximum Candela = 4097.6

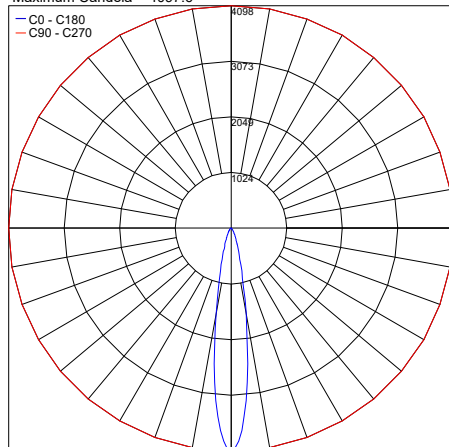

PHOTOMETRIC FILENAME : KRILL_4.0_R3_ZOOM_S_17_3000K_9W_250MA.IES

39°

Maximum Candela = 1261.5

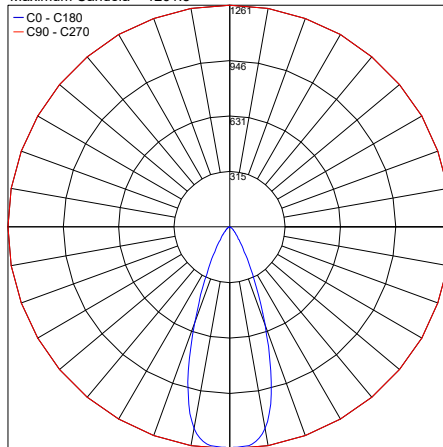

PHOTOMETRIC FILENAME : KRILL_4.0_R3_ZOOM_L_39_3000K_9W_250MA.IES

Job Name/Date:

Fixture Type Designation: