

CDL is a wet label, adjustable in-grade uplight CDX with an integral driver that is suitable for power washing. It is adjustable +/- 10° (total 20°) and is rotatable 120° front and back. It comes in 4 CCTs or RGBW + tunable white with a stainless steel finish. The static white driver is capable of 3 dimming protocols.

TECHNICAL DATA

Wattage / Input	10W (Static White - 120-277VAC) 12W (RGBW+Tunable White - 120-277VAC)
Power Supply	Integral (0-10V, ELV, Triac Dimming on Static White)
Construction	Body: Cast Stainless Steel 304 Alloy Lens: 0.4" Thick, Clear, Non-Skid or Frosted Tempered Glass Lens Frame: Threaded "Bottle Cap"
CCT	2700K, 3000K, 3500K, 4000K, RGBW+Tunable White
CRI	>80
Initial Lumens	1334 lm (3000K - Static White) 750 lm (3000K - RGBW+Tunable White)
Efficacy	133.4 lm/W (3000K - Static White) 62.5 lm/W (3000K - RGBW+Tunable White)
Optics	14°, 25° (Static White) 18°, 24° (RGBW+Tunable White)
Finishes	Stainless Steel
Fixture Dimensions	Ø5.75" x 8.0" h
LED Source	Citizen LED COB, Araya LED Module
IP Rating	IP68, IP69
Driveover Rated	11,000 lbs (30mph)



Fixture Dimensions

Ø5.75" x 8.0" h

See Full Drawing on page 2

ORDERING INFORMATION


Example: CDL-LEY4SS12LQW. Accessories sold separately.

CDL-L	-		4	SS1				
Model #	CCT	Body	Finish	Optic	Driver	Lens	Options	
CDL-L	EW - 2700K EX - 3000K EY - 3500K EZ - 4000K	4 - Fully Recessed	SS1 - Stainless Steel Standard Grill	1 - 14° 2 - 25°	L - 120-277VAC Integral w/ 0-10V Dimming <i>Note: ELV and Triac 120V only</i>	T - Clear Tempered Glass Q - Clear Tempered Glass w/ Non-Skid Pattern G - Frosted Tempered	0 - None W - Linear Spread H - Honeycomb Louver S - Solite Lens B - Special Lens A - Anti-Glare Shield Note: Rubber Lens Holder PPG00274 included w/ options	
Model #	CCT			Optic	Driver			
CDL-L	RW - 12W, RGBW + Tunable White (1650K-8000K) +DMX			1 - 18° 2 - 24°	C - 120-277VAC			

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

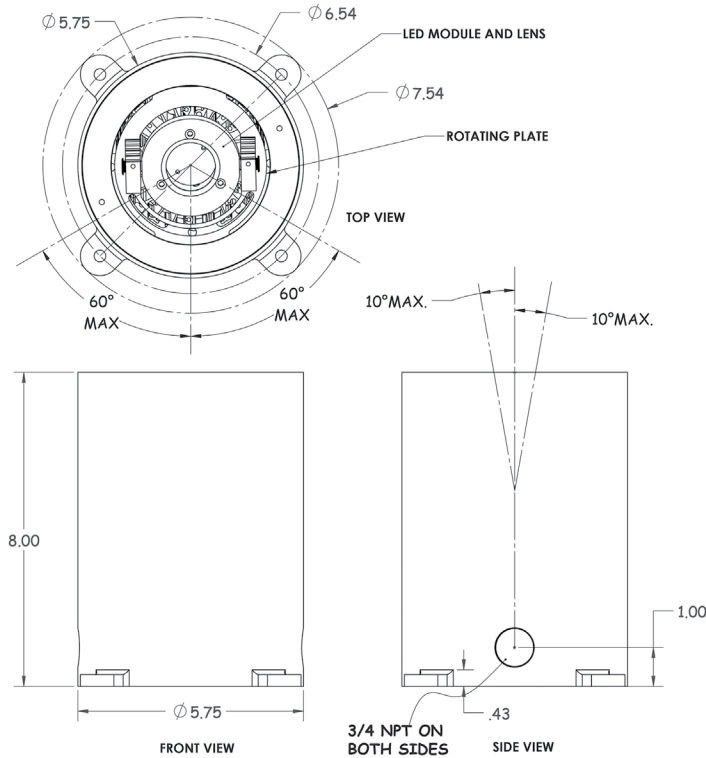


ACCESSORIES


Installation



LL301 - Optional
Leveling Pad
Set of 4




Anti-Glare



PPDG0028001*
Anti-Glare Shield - $\phi 4.2"$
*include as an option
in ordering matrix

ACCESSORIES

Controllers (RGBW)



PPWD00570 - RGBW DMX512+Wifi Controller
Touch Sensitive
Can be controlled by WiFi
Controls 3 zones synchronously and separately

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: