

Zero is a round, IP67-rated, outdoor luminaire in 4 different sizes that can be used as an in-grade uplight or a recessed wall fixture. Zero 45 is the Ø1.8 inch diameter version available in 2 color temperatures, 2 optics options and with or without honeycomb louver.

TECHNICAL DATA

Wattage	3W
Power Supply	Remote 24VDC, not included. See page 2
Construction	Body: Turned Aluminum Lens: Tempered, Transparent Glass
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U3-G0 (3000K)
Delivered Lumens	175 lm (18°, 3000K, no honeycomb) 236 lm (36°, 3000K, no honeycomb)
Efficacy	58.3 lm/W (18°, 3000K) 78.7 lm/W (36°, 3000K)
Optics	18°, 36°
LED Source	Power LED
Finishes	Natural Aluminum
Fixture Dimensions	Ø1.77 x 2.05"
IP Rating	IP67
Impact Resistance	IK06

ORDERING INFORMATION

Example: D900112026.US. Power Supplies / Accessories ordered separately.

D9001		6	US
Model #	CCT (Optics / Honeycomb)	Finish	
D9001	3213 - 2700K (18° with Honeycomb) 3214 - 2700K (18° with NO Honeycomb) 3202 - 2700K (36° with Honeycomb) 3203 - 2700K (36° with NO Honeycomb) 1213 - 3000K (18° with Honeycomb) 1214 - 3000K (18° with NO Honeycomb) 1202 - 3000K (36° with Honeycomb) 1203 - 3000K (36° with NO Honeycomb)	6 - Aluminum	US




With No Honeycomb



With Honeycomb

Fixture Dimensions



Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures - 3W
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-26
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	4-26

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures 3W
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-25

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715

Part Number	Description	Input/Output	# of Fixtures - 3W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-25



*For other power supply options consult factory.***ACCESSORIES****Recessed Box**
D9001 - Ø1.77"

Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA

Note: all photometry is 3000K

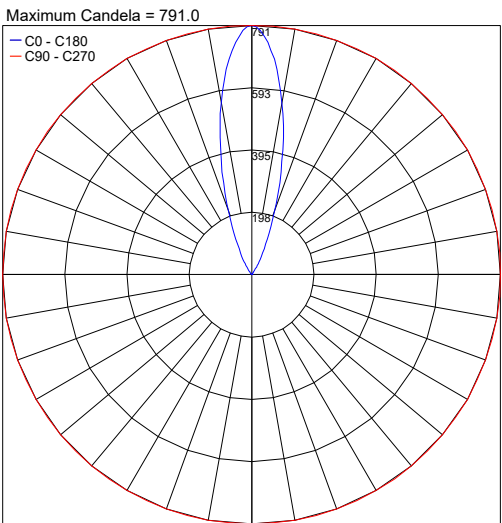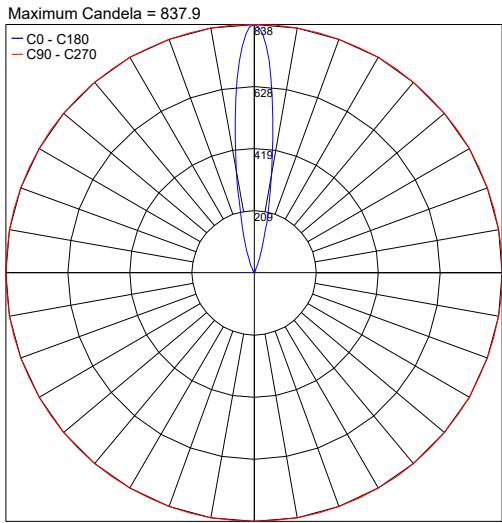

Job Name/Date:

Fixture Type Designation: