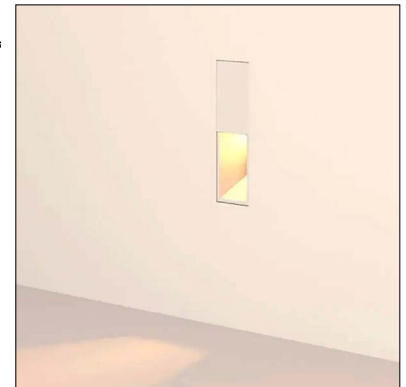


BOA WALL TRIMLESS

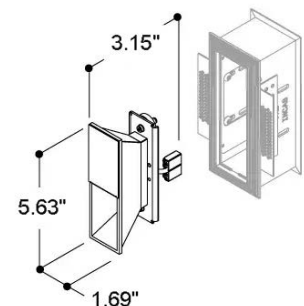
Boa Wall Trimless is a rectangular, recessed wall luminaire a powerful and clearly defined light beam that is suitable for indoor installation in a variety of contemporary settings. It is available in 2 color temperatures and 4 standard finish combinations.

TECHNICAL DATA

Wattage	7W
Power Supply	Remote 700mA, not included. See page 2
Construction	—
CCT	2700K, 3000K (4000K on request)
CRI	>90
Delivered Lumens	300 lm (3000K)
Efficacy	50 lm/W (3000K)
Optics	—
Finishes	4 Standard Combinations, see below
Fixture Dimensions	1.69" w x 5.63" h x 3.15" depth
Cut-out Dimensions	2.95" x 6.89" x max depth 3.15"
Fixture Weight	0.42 lbs
LED Source	CITIZEN WW
Lumen Maintenance	50,000 hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
IP Rating	IP20



Fixture Dimensions



ORDERING INFORMATION

Example: T405085. Power Supplies / Accessories ordered separately.

--

Model No.	Description
T405067	2700K, Textured White + Textured White
T405082	2700K, Textured White + Gold Anodized
T405096	2700K, Textured Black + Gold Anodized
T405095	2700K, Textured Black + Textured White
T405057	3000K, Textured White + Textured White
T405072	3000K, Textured White + Gold Anodized
T405086	3000K, Textured Black + Gold Anodized
T405085	3000K, Textured Black + Textured White

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

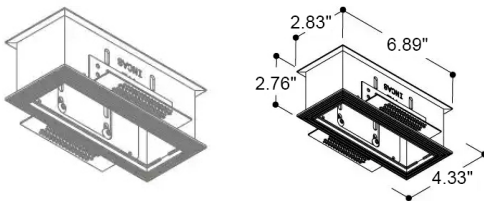
Part Number	Description	Input/Output	# of Fixtures
PPLT00498	Phase Dim (120V only)	120VAC to 700mA, 12W, Class 2, DAMP	1-2
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-2
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	3-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-5

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00515	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 14W, Class 2	2-2
PPLT00635	PEQ0E	PEQ0	100%-1%	Hi-Lume™ Premier 0.1% EcoSystem™ F2B LED Driver	120/277VAC to 700mA, 20W, Class 2	2-2

For other power supply options consult factory.


ACCESSORIES - Installation

**T701117 - REQUIRED**

Frame for Plaster

6.89" l x 2.83" w x 2.76" h


Cut-out: 6.89" x 2.95" x 3.15" h

**T701177 - Optional**

Frame + Box for Plaster

10.04" l x 9.06" w x 5.20" h

Cut-out: 10.04" x 9.06" x 5.12" h

**T701187 - Optional**

Frame for Plastered Concrete Slabs

9.84" l x 6.89" w x 2.56" h

Cut-out: 2x 5.94" - Center 3.54"

Job Name/Date:

Fixture Type Designation: